

# Schlüter®- LIPROTEC

## Illustrated price list LT 26

United Kingdom · Effective 1st January 2026



2026



## SIMPLY INDIVIDUAL – Schlüter®-LIPROTEC

LED light and ceramics – a combination that keeps gaining fans. Schlüter-LIPROTEC makes it easier than ever to create individual light concepts with ceramic or natural stone surfaces. With the Schlüter-LIPROTEC-EASY and Schlüter-LIPROTEC-PRO series, we offer systems that are tailored to the skills of the installers.

Whilst the EASY series is a plug-and-play system that only requires limited expertise in light installation, the PRO series is designed for professional installers who have experience with light installation and wiring. In the CONTROL section you will find the control technology for the two series LIPROTEC-EASY and LIPROTEC-PRO. And finally, Schlüter-LIPROTEC-PLAN provides all the information that professional (light) designers need to create and implement accent lighting with LIPROTEC.

### EASY

Individual light installation made easy – due to convenient plug systems and easy mounting, the plug-and-play series provides solutions for every situation, even for installers who are not experts.

- Convenient plug systems
- Easy installation
- Ready for immediate use
- Large selection
- Power supply units up to 100 W




### PLAN

In the PLAN section, planners, architects, lighting professionals and installers find all technical information at a glance. With this expertise, there are no limits to what light installations can be created with Schlüter-LIPROTEC products.


# PRO

Lighting for professional installers – with the PRO series of Schlüter-LIPROTEC, turn any room into an oasis of light.

- Individual light installations
- Products with a multitude of combination options
- Limitless possibilities
- The series for professional installers



- Technical details
- Compact product overview
- Materials and surfaces
- Planning aids



# CONTROL


Simply control light – Schlüter-LIPROTEC Bluetooth controls offer a wide range of options for conveniently operating individual light sources.

- Available in EASY and PRO version
- For white and coloured LED lighting solutions
- With proven Bluetooth® technology
- Via remote control, mobile device or wireless rotary control



## AS VERSATILE AS THE LIGHT

Fascinate customers, turn visions of living spaces into reality, immersed in colour and the versatility of light. On the following page you will find the solutions for the various applications, either as EASY (plug-and-play sets) or PRO (individually configurable).

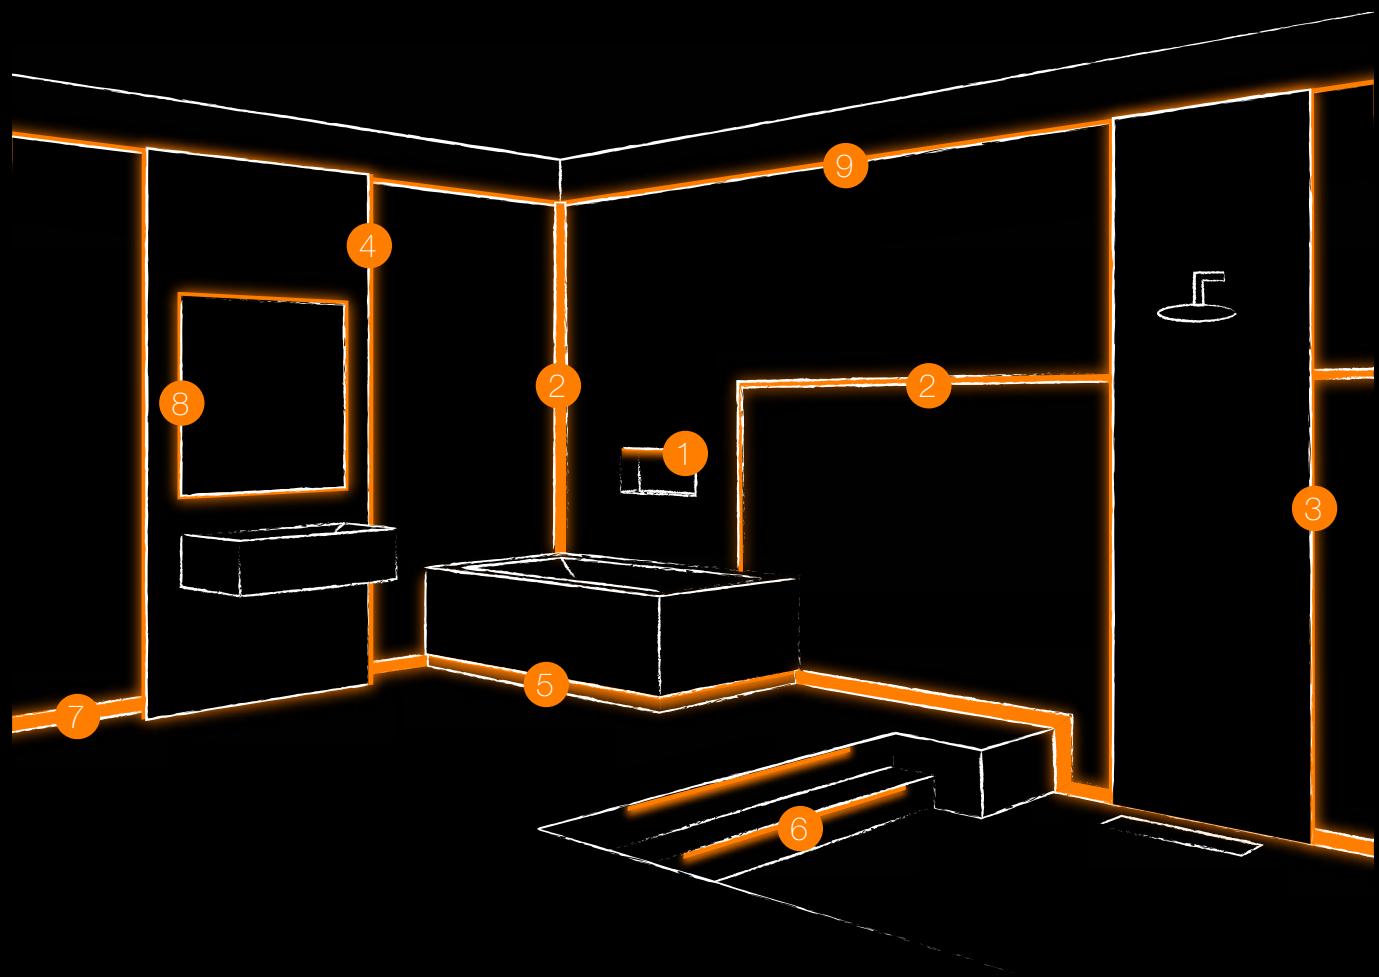

For technical information and properties, refer to the PLAN section starting on page 78.

|   |   | EASY   | PRO   |
|---|---|--------|-------|
|   |   | Page   | Page  |
| 1 | NICHE   |        |       |
|   | NLT – Niche with LED lighting, coloured + white                           | SET    | 8     |
|   | NLT-BR – Niche with LED lighting, coloured + white, incl. controller      | SET    | 10    |
| 2 | LINEAR LIGHT  |        |       |
|   | LLPM – LED module, coloured + white   linear light with anchoring leg     | MODULE | 12    |
|   | LLP – LED module, coloured   linear light                                 | MODULE | 14    |
|   | LLPE – LED module, coloured   linear light   wall corner                  | MODULE | 16    |
|   | LL – Linear light, coloured + white                                       |        | 22    |
|   | LLE – Linear light, coloured + white   Corner                             |        | 26    |
| 3 | SHOWER  |        |       |
|   | LLPM – LED module, coloured + white   linear light with anchoring leg     | MODULE | 12    |
|   | LLP – LED module, coloured   linear light                                 | MODULE | 14    |
|   | LLPE – LED module, coloured   linear light   wall corner                  | MODULE | 16    |
|   | LL – Linear light, coloured + white                                       |        | 22    |
|   | LLE – Linear light, coloured + white   Corner                             |        | 26    |
|   | WS – Wall panel lighting, coloured + white                                |        | 30    |
|   | WSK – Wall panel lighting with cable duct, coloured + white               | SET    | 34/58 |
|   | WSQ – Wall panel lighting with QUADEC finishing profile, coloured + white |        | 38    |
| 4 | WALL PANEL  |        |       |
|   | WS – Wall panel lighting, coloured + white                                |        | 30    |
|   | WSK – Wall panel lighting with cable duct, coloured + white               | SET    | 34/58 |
|   | WSQ – Wall panel lighting with QUADEC finishing profile, coloured + white |        | 38    |
| 5 | BATHTUB   |        |       |
|   | LLPM – LED module, coloured + white   linear light with anchoring leg     | MODULE | 12    |
|   | WS – Wall panel lighting, coloured + white                                |        | 30    |
|   | WSK – Wall panel lighting with cable duct, coloured + white               | SET    | 34/58 |
| 6 | STAIRCASE   |        |       |
|   | PB – Stair edge lighting, white   | SET    | 42/60 |
| 7 | BASEBOARD   |        |       |
|   | DESIGNBASE-QD – Landing/border profile, white                             |        | 46    |
|   | VB – Cove lighting, white   |        | 50    |
| 8 | MIRROR  |        |       |
|   | LLPM – LED module, coloured + white   linear light with anchoring leg     | MODULE | 12    |
|   | LLP – LED module, coloured   linear light                                 | MODULE | 14    |
|   | D – Carrier profile for mirror, white                                     | SET    | 54/62 |
|   | WS – Wall panel lighting, coloured + white                                |        | 30    |
|   | WSK – Wall panel lighting with cable duct, coloured + white               | SET    | 34/58 |
| 9 | LIGHTING COVE   |        |       |
|   | WS – Wall panel lighting, coloured + white                                |        | 30    |
|   | WSK – Wall panel lighting with cable duct, coloured + white               | SET    | 34/58 |
|   | VB – Cove lighting, white   |        | 50    |






# EASY

Schlüter-LIPROTEC-LLP/-LLPM/-LLPE are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of aluminium or brushed stainless steel V4A. The LED modules are available either with a fixed white-light colour temperature of 3000 K or 4900 K, or with a RGB+W colour range. The latter makes it possible to choose from more than 16 million hues and colour temperatures from 2500 K – 6500 K.

The robust carrier profile enables applications in areas with exposure to water and vapour, from an installation height of 11 mm. It can be used on walls and ceilings as well as in shower areas. In light traffic indoor areas, the LED modules can even be installed in the floor area. For use in protected outdoor areas and pool landscapes, we recommend using our Schlüter-LIPROTEC-LLPM LED modules with brushed V4A stainless steel profiles.

The LED modules are available as plug-and-play variants in different lengths. Our LED strip can simply be shortened at the marked cutting points and sealed with the supplied end caps to maintain its IP degree of protection. The LED modules can be integrated into a system using cable connections and Y-switches, depending on the light characteristics. Power supply units and LED control components are also designed as plug-and-play variants to facilitate installation. You can find additional accessories such as cable connections, distributors and wall boxes with sealing function in the accessories section.

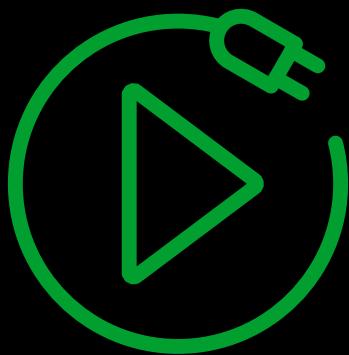

## SETS

|   | Page      |
|---|-----------|
| NLT – Niche with LED lighting, coloured + white                       | SET 8     |
| NLT-BR – Niche with LED lighting, coloured + white, incl. controller  | SET 10    |
| LLPM – LED module, coloured + white   linear light with anchoring leg | MODULE 12 |
| LLP – LED module, coloured   linear light                             | MODULE 14 |
| LLPE – LED module, coloured   linear light   wall corner              | MODULE 16 |

## ACCESSORIES

|                                  |       |
|----------------------------------|-------|
| End cap LED strip                | 18    |
| Power supply units               | 18    |
| Cables / Distributors            | 18/19 |
| Adapter / Hollow-wall box / Tool | 19    |

## KEY

Explanations of properties / Areas of application

107



LED controls can be found in the CONTROL section from page 68.




For technical information and properties, refer to the PLAN section starting on page 78.



FIND OUT MORE AT:

LIPROTEC.CO.UK



# Schlüter®-KERDI-BOARD-NLT




Schlüter-KERDI-BOARD-NLT are prefabricated niche sets made of KERDI-BOARD with plug-and-play LIPROTEC-LED technology. They are used to create illuminated niches and storage surfaces for all kinds of wall areas. These niches can be integrated into the Schlüter-KERDI waterproofing system as a bonded waterproofing assembly. The niches are available in different dimensions and lighting options. The rectangular niches are available with illumination either on the long or the narrow side. The LED module can either be positioned at the front edge, in the centre or at the rear of the wall that is to be tiled. The scope of supply includes all components required for the installation, as well as the cable connection, power supply and sealing collar.

The Bluetooth controls to be ordered separately can be found in the CONTROL section from page 68.

(Product data sheet 12.2)

## Dimensions of niches

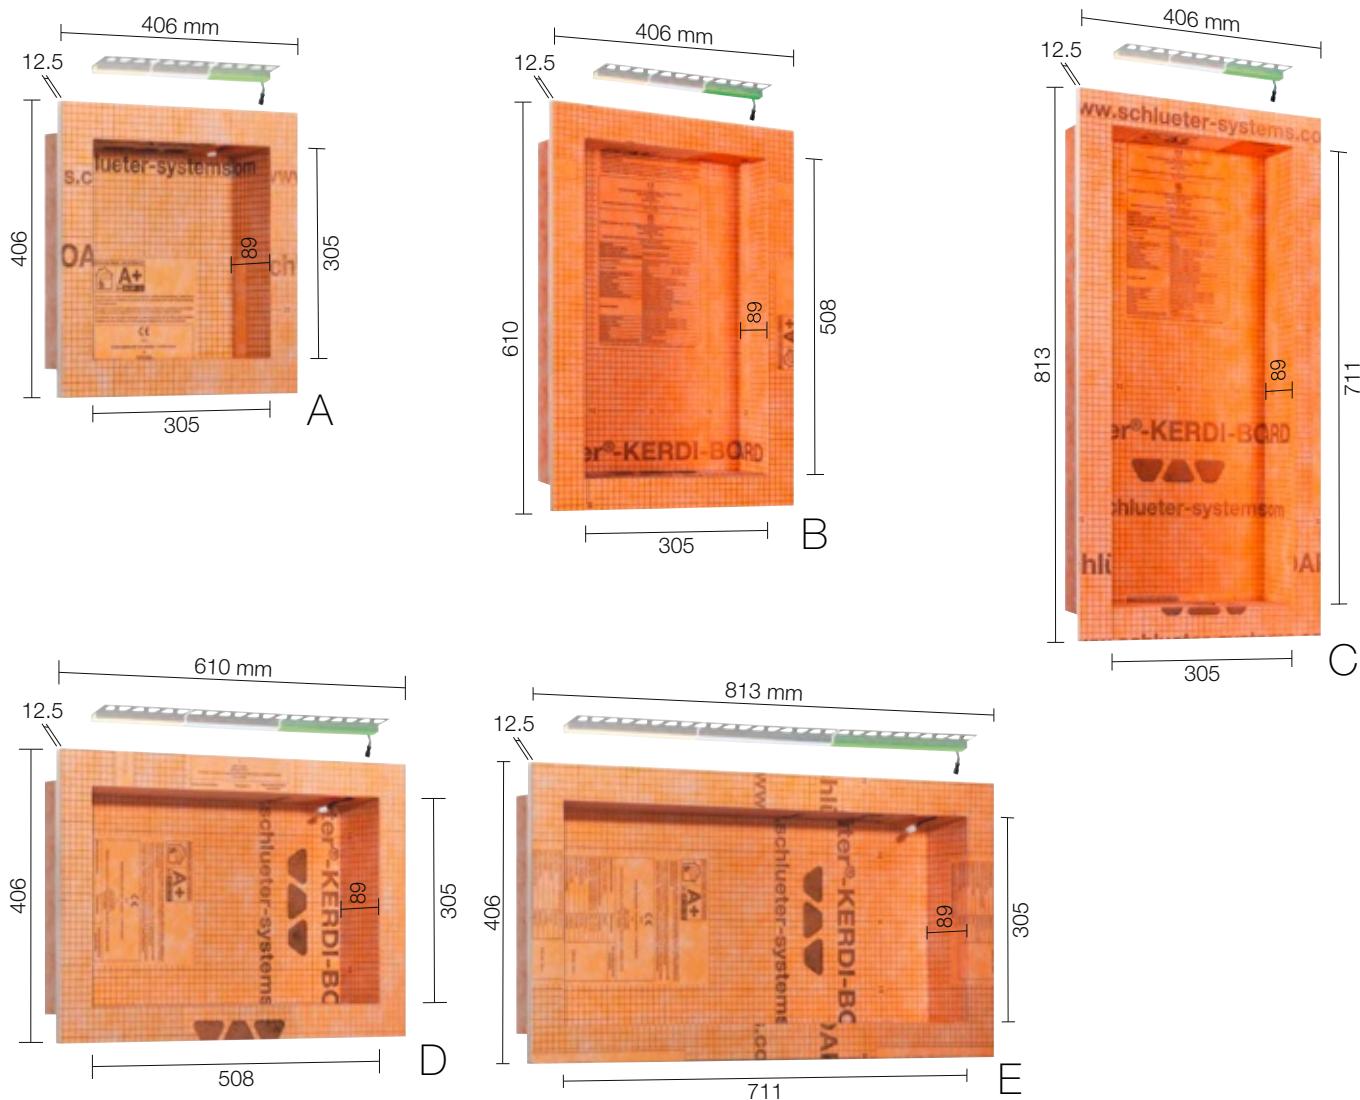

## Set includes:



For explanations of the symbols, refer to page 107.



## Niche set with LED lighting

### Schlüter®-KERDI-BOARD-NLT

niche set with LED lighting

|   | B x H x T (mm) | Type of light | Art. No.          | £ / Set       | PL (Set) |
|---|----------------|---------------|-------------------|---------------|----------|
| A | 305 x 305 x 89 | warm white    | KB 12 NL TP1 AE 1 | <b>278.00</b> | 20       |
|   |                | neutral white | KB 12 NL TP1 AE 2 | <b>278.00</b> | 20       |
|   |                | RGB + white   | KB 12 NL TP1 AE 9 | <b>312.75</b> | 20       |
| B | 305 x 508 x 89 | warm white    | KB 12 NL TP2 AE 1 | <b>312.75</b> | 20       |
|   |                | neutral white | KB 12 NL TP2 AE 2 | <b>312.75</b> | 20       |
|   |                | RGB + white   | KB 12 NL TP2 AE 9 | <b>347.49</b> | 20       |
| C | 305 x 711 x 89 | warm white    | KB 12 NL TP3 AE 1 | <b>359.07</b> | 20       |
|   |                | neutral white | KB 12 NL TP3 AE 2 | <b>359.07</b> | 20       |
|   |                | RGB + white   | KB 12 NL TP3 AE 9 | <b>393.82</b> | 20       |
| D | 508 x 305 x 89 | warm white    | KB 12 NL TP4 AE 1 | <b>341.70</b> | 20       |
|   |                | neutral white | KB 12 NL TP4 AE 2 | <b>341.70</b> | 20       |
|   |                | RGB + white   | KB 12 NL TP4 AE 9 | <b>359.07</b> | 20       |
| E | 711 x 305 x 89 | warm white    | KB 12 NL TP5 AE 1 | <b>416.99</b> | 20       |
|   |                | neutral white | KB 12 NL TP5 AE 2 | <b>416.99</b> | 20       |
|   |                | RGB + white   | KB 12 NL TP5 AE 9 | <b>434.36</b> | 20       |

**Note:** The dimensions represent interior clearance dimensions. The first length specification is the illuminated length.


## Technical data of the included LED modules

| NLT 9 (RGB+W)               |                      |
|-----------------------------|----------------------|
| Dimensions of LED (B x H)   | 17 x 14.5 mm         |
| Rated output (W/Unit)       | See table on page 80 |
| Number of LED (u./m)        | 112                  |
| Colour temperature (Kelvin) | RGB+W (2700 K)       |
| CRI                         | 90                   |
| Included power supply       | 230 V. 15 W          |
| Included cable              | 3 m                  |

| NLT 1 (warm white)          |                      |
|-----------------------------|----------------------|
| Dimensions of LED (B x H)   | 12 x 10.5 mm         |
| Rated output (W/Unit)       | See table on page 80 |
| Number of LED (u./m)        | 280                  |
| Colour temperature (Kelvin) | 3000 K               |
| CRI                         | 92                   |
| Included power supply       | 230 V. 15 W          |
| Included cable              | 3 m                  |

| NLT 2 (neutral white)       |                      |
|-----------------------------|----------------------|
| Dimensions of LED (B x H)   | 12 x 10.5 mm         |
| Rated output (W/Unit)       | See table on page 80 |
| Number of LED (u./m)        | 280                  |
| Colour temperature (Kelvin) | 4900 K               |
| CRI                         | 92                   |
| Included power supply       | 230 V. 15 W          |
| Included cable              | 3 m                  |

## Application areas

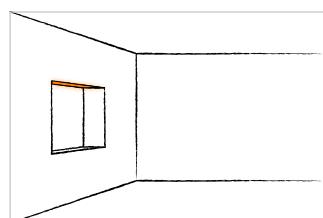

**i**  
Schlüter-SHELF-N offers precisely fitting shelves for the niche sets A, B and C. Please refer to our Schlüter®-PROFILES and SYSTEMS price list for design variants and material qualities.



### Note:

In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".



## Schlüter®-KERDI-BOARD-NLT-BR



Schlüter-KERDI-BOARD-NLT-BR are prefabricated niche sets made of KERDI-BOARD with plug-and-play LIPROTEC-LED RGB+W technology and with Bluetooth/wireless receivers. The various light colours can be selected either via the supplied remote control or via suitable Bluetooth-compatible smartphones or tablets. They are used to create illuminated niches and storage surfaces for all kinds of wall areas. These niches can be integrated into the Schlüter-KERDI waterproofing system as a bonded waterproofing assembly.

The niches are available in different dimensions. The rectangular niches are available with illumination either on the long or the narrow side. The RGB+W LED module can either be positioned at the front edge, centre or at the rear wall that is to be tiled. The scope of supply includes all components required for the installation, as well as the cable connection, power supply, LIPROTEC-PEBR 4 Bluetooth control and sealing collar. We recommend using a standard light switch for convenience.

(Product data sheet 12.2)



### Set includes:



**Note:** The different niche variants are listed on page 8.

**i**  
Including Bluetooth receiver  
and remote control!



For explanations of the symbols, refer to page 107.

## Niche set with LED lighting and controller

### Schlüter®-KERDI-BOARD-NLT-BR

niche set with LED lighting and controller

|   | B x H x T (mm) | Type of light | Art. No.             | £ / Set       | PL (Set) |
|---|----------------|---------------|----------------------|---------------|----------|
| A | 305 x 305 x 89 | RGB + white   | KB 12 NL TP1 AE 9 BR | <b>516.01</b> | 20       |
| B | 305 x 508 x 89 | RGB + white   | KB 12 NL TP2 AE 9 BR | <b>550.79</b> | 20       |
| C | 305 x 711 x 89 | RGB + white   | KB 12 NL TP3 AE 9 BR | <b>597.18</b> | 20       |
| D | 508 x 305 x 89 | RGB + white   | KB 12 NL TP4 AE 9 BR | <b>562.39</b> | 20       |
| E | 711 x 305 x 89 | RGB + white   | KB 12 NL TP5 AE 9 BR | <b>637.74</b> | 20       |

**Note:** The dimensions represent interior clearance dimensions. The first length specification is the illuminated length.

## Technical data of supplied LED module

| NLT 9 BR (RGB+W)            |                      |
|-----------------------------|----------------------|
| Dimensions of LED (B x H)   | 17 x 14.5 mm         |
| Rated output (W/Unit)       | See table on page 80 |
| Number of LED (u./m)        | 112                  |
| Colour temperature (Kelvin) | RGB+W (2700 K)       |
| CRI                         | 90                   |
| Included power supply       | 230 V, 15 W          |
| Included cable              | 3 m                  |

**i**  
Detailed technical information about  
Schlüter-KERDI-BOARD-NLT-/NLT-BR  
can be found on pages 80/81.

## Technical data of the included Bluetooth control

| LT PEBR 4                                     |                  |
|---|------------------|
| Receiver/remote control transmission standard | Bluetooth/radio  |
| Max. range                                    | 10 m             |
| Input voltage                                 | 24 V, DC         |
| Max. total load in the LIPROTEC system        | 90 W             |
| Max. length LED strips                        | 6 m              |
| Degree of protection                          | IP 63            |
| Ambient temperature                           | -20 °C to +50 °C |



**i**  
Schlüter-SHELF-N offers precisely fitting shelves for the niche sets A, B and C. Please refer to our Schlüter®-PROFILES and SYSTEMS price list for design variants and material qualities.



### Note:

Our Schlüter-LIPROTEC-ERP radio rotary control is available as an optional accessory in the CONTROL section on page 73.




# Schlüter®-LIPROTEC-LLPM



Schlüter-LIPROTEC-LLPM are plug-and-play LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of aluminium or brushed stainless steel V4A with trapezoid perforated anchoring leg. The LED modules are available either with a fixed white-light colour temperature of 3000 K or 4900 K, or with a RGB+W colour range. The latter makes it possible to choose from more than 16 million hues and colour temperatures from 2500 K – 6500 K. The white LED module is available with an installation height of 11 mm, which means it can be installed flush with the tile.

(Product data sheet 15.8)

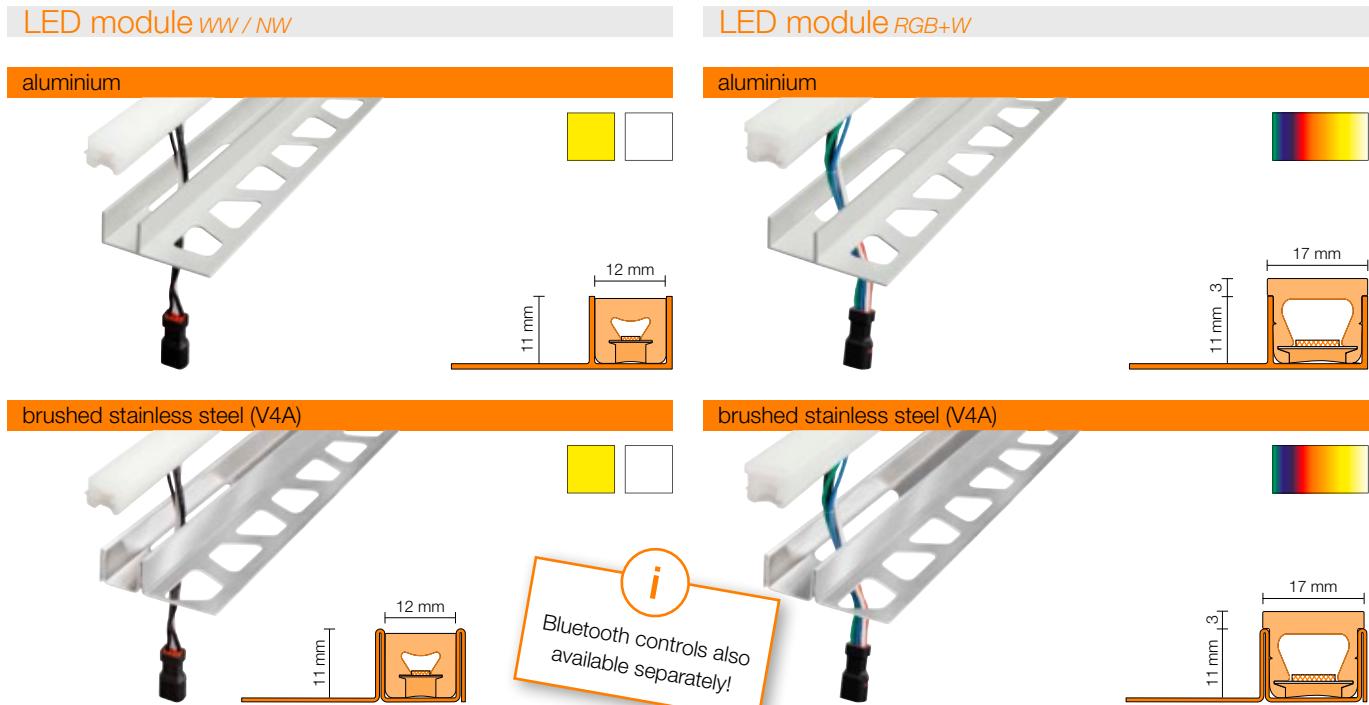

**Note:** End caps incl. sealing compound for shortening the LED strip are included in the set.

On the RGB+W version, the LED strip protrudes approx. 3 mm from the profile.

Only the LED module with white light is suitable for use on the floor in domestic applications.

## Technical data of the included LED modules

| LLPM 9 (RGB+W)              |                |
|-----------------------------|----------------|
| Dimensions of LED (B x H)   | 17 x 14.5 mm   |
| Rated output (W/m)          | 15             |
| Number of LED (u./m)        | 112            |
| Colour temperature (Kelvin) | RGB+W (2700 K) |
| CRI                         | 90             |

Can be shortened every 62.5 mm

Max. length of aligned LED modules in the LIPROTEC-EASY System: RGB+W = 6 m, white = 18 m

| LLPM 1 (warm white)         |              |
|-----------------------------|--------------|
| Dimensions of LED (B x H)   | 12 x 10.5 mm |
| Rated output (W/m)          | 5            |
| Number of LED (u./m)        | 280          |
| Colour temperature (Kelvin) | 3000 K       |
| CRI                         | 92           |

Can be shortened every 25 mm

| LLPM 2 (neutral white)      |              |
|-----------------------------|--------------|
| Dimensions of LED (B x H)   | 12 x 10.5 mm |
| Rated output (W/m)          | 5            |
| Number of LED (u./m)        | 280          |
| Colour temperature (Kelvin) | 4900 K       |
| CRI                         | 92           |

Can be shortened every 25 mm

## End cap

Schlüter-LIPROTEC-LLPM/EK are end caps for proper termination of the LED plug-and-play sets. They can be used as left or right end. The holding bar is embedded into the tile adhesive.



### Schlüter®-LIPROTEC-LLPM/EK

end cap, anodised aluminium

| B (mm) | Art. No.         | £ / U.      | P (Unit) |
|--------|------------------|-------------|----------|
| 12     | EK/LLP 110 AE 12 | <b>5.10</b> | 50       |
| 15     | EK/LLP 110 AE 15 | <b>5.10</b> | 50       |



### Schlüter®-LIPROTEC-LLPM/EK

end cap, brushed stainless steel (V4A)

| B (mm) | Art. No.          | £ / U.      | P (Unit) |
|--------|-------------------|-------------|----------|
| 12     | EK/LLP 110 V4A 12 | <b>5.10</b> | 50       |
| 15     | EK/LLP 110 V4A 15 | <b>5.10</b> | 50       |

**Note:** B = 12 mm (LED module, white) / B = 15 mm (LED module, RGB+W)



For explanations of the symbols, refer to page 107.

## LED module | linear light with anchoring leg *aluminium*

### Schlüter®-LIPROTEC-LLPM

LED module aluminium

| Material  | L (cm) | Type of light | Art. No.         | £ / m         | P (Unit) |
|-----------|--------|---------------|------------------|---------------|----------|
| aluminium | 50     | warm white    | LLP 110 AE 1/50  | <b>185.33</b> | 10       |
|           |        | neutral white | LLP 110 AE 2/50  | <b>185.33</b> | 10       |
|           |        | RGB + white   | LLP 110 AE 9/50  | <b>208.49</b> | 10       |
|           | 100    | warm white    | LLP 110 AE 1/100 | <b>162.16</b> | 10       |
|           |        | neutral white | LLP 110 AE 2/100 | <b>162.16</b> | 10       |
|           |        | RGB + white   | LLP 110 AE 9/100 | <b>185.33</b> | 10       |
|           | 200    | warm white    | LLP 110 AE 1/200 | <b>133.20</b> | 10       |
|           |        | neutral white | LLP 110 AE 2/200 | <b>133.20</b> | 10       |
|           |        | RGB + white   | LLP 110 AE 9/200 | <b>156.37</b> | 10       |
|           | 250    | warm white    | LLP 110 AE 1     | <b>121.63</b> | 10       |
|           |        | neutral white | LLP 110 AE 2     | <b>121.63</b> | 10       |
|           |        | RGB + white   | LLP 110 AE 9     | <b>144.79</b> | 10       |

**Exact lengths:** 50.5 cm, 100.2 cm, 200 cm and 250 cm



## LED module | linear light with anchoring leg *brushed stainless steel (V4A)*


### Schlüter®-LIPROTEC-LLPM

LED module brushed stainless steel (V4A)

| Material              | L (cm) | Type of light | Art. No.          | £ / m         | P (Unit) |
|-----------------------|--------|---------------|-------------------|---------------|----------|
| stainless steel (V4A) | 50     | warm white    | LLP 110 V4A 1/50  | <b>208.47</b> | 10       |
|                       |        | neutral white | LLP 110 V4A 2/50  | <b>208.47</b> | 10       |
|                       |        | RGB + white   | LLP 110 V4A 9/50  | <b>232.30</b> | 10       |
|                       | 100    | warm white    | LLP 110 V4A 1/100 | <b>184.66</b> | 10       |
|                       |        | neutral white | LLP 110 V4A 2/100 | <b>184.66</b> | 10       |
|                       |        | RGB + white   | LLP 110 V4A 9/100 | <b>208.47</b> | 10       |
|                       | 200    | warm white    | LLP 110 V4A 1/200 | <b>154.87</b> | 10       |
|                       |        | neutral white | LLP 110 V4A 2/200 | <b>154.87</b> | 10       |
|                       |        | RGB + white   | LLP 110 V4A 9/200 | <b>178.69</b> | 10       |
|                       | 250    | warm white    | LLP 110 V4A 1     | <b>142.95</b> | 10       |
|                       |        | neutral white | LLP 110 V4A 2     | <b>142.95</b> | 10       |
|                       |        | RGB + white   | LLP 110 V4A 9     | <b>166.78</b> | 10       |

**Exact lengths:** 50.5 cm, 100.2 cm, 200 cm and 250 cm

## Application areas

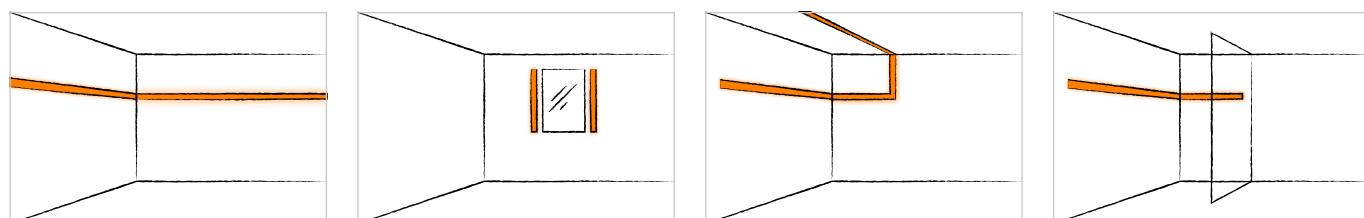




# Schlüter®-LIPROTEC-LLP



Schlüter-LIPROTEC-LLP are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a U-shaped carrier profile made of aluminium. With the LED modules, coloured RGB+W light strips with more than 16 million different hues and colour temperatures of 2500 K – 6500 K can be created. The carrier profile with an installation height of 17 mm makes flush installation possible.  
(Product data sheet 15.8)

## LED module *RGB+W*



**Note:** End caps incl. sealing compound for shortening the LED strip are included in the set.

## Technical data of the included LED modules

### LLP 9 (RGB+W)

|                             |                |
|-----------------------------|----------------|
| Dimensions of LED (B x H)   | 17 x 14.5 mm   |
| Rated output (W/m)          | 15             |
| Number of LED (u./m)        | 112            |
| Colour temperature (Kelvin) | RGB+W (2700 K) |
| CRI                         | 90             |

Can be shortened every 62.5 mm

Max. length of aligned LED modules in the LIPROTEC-EASY System: 6 m

## End cap

### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, indirect illumination



| H (mm) | Art. No.           | £ / U. | P (Unit) |
|--------|--------------------|--------|----------|
| 17     | EK / LT WS I AE 20 | 15.08  | 50       |



For explanations of the symbols, refer to page 107.

## LED module | linear light *aluminium*




### Schlüter®-LIPROTEC-LLP

LED module aluminium

| Material  | L (cm) | Type of light | Art. No.          | £ / m         | P (Unit) |
|-----------|--------|---------------|-------------------|---------------|----------|
| aluminium | 50     | RGB + white   | LLP 2017 AE 9/50  | <b>243.24</b> | 10       |
|           | 100    | RGB + white   | LLP 2017 AE 9/100 | <b>208.49</b> | 10       |
|           | 200    | RGB + white   | LLP 2017 AE 9/200 | <b>173.74</b> | 10       |
|           | 250    | RGB + white   | LLP 2017 AE 9     | <b>162.16</b> | 10       |

**Exact lengths:** 50.5 cm, 100.2 cm, 200 cm and 250 cm

### Application areas

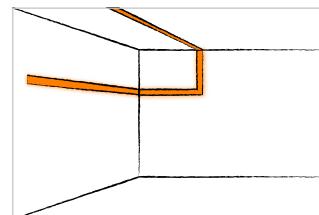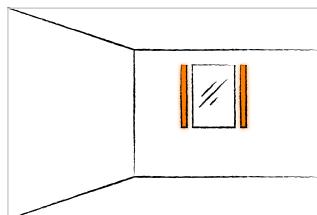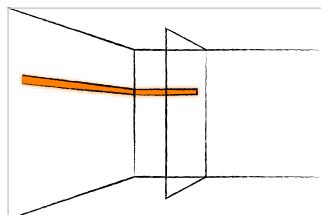



# Schlüter®-LIPROTEC-LLPE



Schlüter-LIPROTEC-LLPE are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of anodised aluminium. The LED module with RGB+W coloured light range makes it possible to choose from more than 16 million different hues and colour temperatures from 2500 K – 6500 K. With the LED module, accent lighting can be created at wall corners. It is suitable for use in internal and external corners in the shower, preferably positioned vertically.


(Product data sheet 15.8)

## LED module *RGB+W*

aluminium



**i**  
Bluetooth controls also available separately!

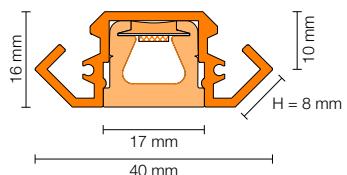

**Note:** End caps incl. sealing compound for shortening the LED strip are included in the set.

## Technical data of the included LED modules

### LLPE 9 (RGB+W)

|                             |                |
|-----------------------------|----------------|
| Dimensions of LED (B x H)   | 17 x 14.5 mm   |
| Rated output (W/m)          | 15             |
| Number of LED (u./m)        | 112            |
| Colour temperature (Kelvin) | RGB+W (2700 K) |
| CRI                         | 90             |

Can be shortened every 62.5 mm

Max. length of aligned LED modules in the LIPROTEC-EASY System: 6 m

## End cap



### Schlüter®-LIPROTEC-LLE/EK

end cap, anodised aluminium

| Art. No.         | £ / U. | P (Unit) |
|------------------|--------|----------|
| EK / LT LLE / AE | 13.51  | 50       |



For explanations of the symbols, refer to page 107.


### LED module | linear light | wall corner aluminium

#### Schlüter®-LIPROTEC-LLPE

LED module aluminium

| Material  | L (cm) | Type of light | Art. No.        | £ / m  | P (Unit) |
|-----------|--------|---------------|-----------------|--------|----------|
| aluminium | 250    | RGB + white   | LL EP 4016 AE 9 | 167.96 | 10       |

#### Application areas

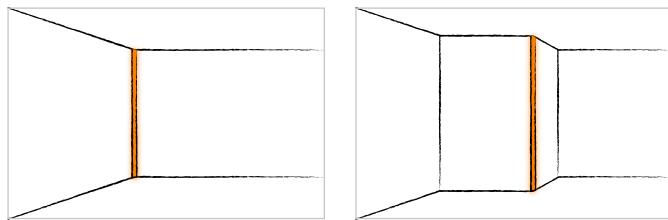



# Accessories

The plug-and-play design of the EASY series accessories makes it much easier to combine the components. You can see how to connect the individual elements and which system limitations exist in the PLAN section from page 98.

## End cap LED strip

### Schlüter®-LIPROTEC-PES

The scope of delivery of the LIPROTEC-EASY LED modules already includes end caps, which enable a watertight seal when the LED module is shortened. The end cap set, which is available separately, offers an additional option for closing off open LED ends of the LIPROTEC-EASY LED modules.



### Schlüter®-LIPROTEC-PES

replacement end caps for LT-EASY LED strips

| H (mm) | Art. No.      | £ / Set     | P (Set) |
|--------|---------------|-------------|---------|
| 12     | EK / LT PES 1 | <b>4.85</b> | 10      |
| 15     | EK / LT PES 9 | <b>5.44</b> | 10      |

The set contains two end caps, incl. sealing adhesive.

## Power supply

### Schlüter®-LIPROTEC-PEKE

Power supply units convert the mains voltage to the 24 V required by the LED strips. They are easy to install and available in different wattages from 30 to 100 W. They are equipped with a connection cable with Euro plug, as well as plug-and-play connectors for the Schlüter-LIPROTEC-EASY system.



### Schlüter®-LIPROTEC-PEKE

power supply, 24 V, DC,  
with Euro plug and connector

| Watt | Max. Watt* | Art. No.         | £ / U.        | P (Unit) |
|------|------------|------------------|---------------|----------|
| 30   | 27         | LT PEKE 24V 30W  | <b>78.77</b>  | 10       |
| 50   | 45         | LT PEKE 24V 50W  | <b>97.31</b>  | 10       |
| 75   | 67.5       | LT PEKE 24V 75W  | <b>127.40</b> | 10       |
| 100  | 90         | LT PEKE 24V 100W | <b>178.38</b> | 10       |

\* A safety reserve has to be taken into account when selecting the power supply unit (see maximum load of the corresponding power supply unit).

## Note:

The dimensions of the power supplies can be found on page 64.

## Low-voltage cable

### Schlüter®-LIPROTEC-PZK

Schlüter-LIPROTEC-PZK is a plug-and-play cable, available in varying lengths, for connecting the power supply unit or Bluetooth receiver and the plug-and-play LED module.



### Schlüter®-LIPROTEC-PZK

low-voltage cable

| L (cm) | Art. No.     | £ / U.       | P (Unit) |
|--------|--------------|--------------|----------|
| 80     | LT PZK / 80  | <b>19.13</b> | 10       |
| 150    | LT PZK / 150 | <b>20.71</b> | 10       |
| 300    | LT PZK 3M    | <b>24.31</b> | 10       |
| 500    | LT PZK 5M    | <b>28.96</b> | 10       |

## Note:

The max. combined cable lengths should not exceed 10 m.

## Low-voltage distributor

### Schlüter®-LIPROTEC-PZV

Schlüter-LIPROTEC-PZV is a plug-and-play distributor for connecting 2 or 4 additional plug-and-play LED modules to an installation.



### Schlüter®-LIPROTEC-PZV

low-voltage distributor

| Closing | Art. No. | £ / U. | P (Unit) |
|---------|----------|--------|----------|
| 2       | LT PZV 2 | 23.75  | 10       |
| 4       | LT PZV 4 | 35.90  | 10       |

## Low-voltage adapter

### Schlüter®-LIPROTEC-PZA

Schlüter-LIPROTEC-PZA is an adapter cable for connecting the individual components of Schlüter-LIPROTEC-EASY (plug-and-play) and Schlüter-LIPROTEC-PRO. The adapter can also be used to integrate LED modules into a standard electrical installation. This connection must only be carried out by a qualified electrician. The clamping options illustrated schematically on page 99 must be observed.



### Schlüter®-LIPROTEC-PZA


low-voltage adapter cable

| L (cm) | Art. No.     | £ / U. | P (Unit) |
|--------|--------------|--------|----------|
| 100    | LT PZA / 100 | 19.26  | 10       |

## Low-voltage hollow-wall box

### Schlüter®-LIPROTEC-PZH


Schlüter-LIPROTEC-PZH is a hollow wall junction box with pre-adhered Schlüter-KERDI sealing collar for use in waterproofing assemblies with tile coverings (e.g. in shower areas). It creates a hollow space for plug connections to reversibly install the plug-and-play LED modules, and is attached with suitable adhesive or with Schlüter-KERDI-COLL.

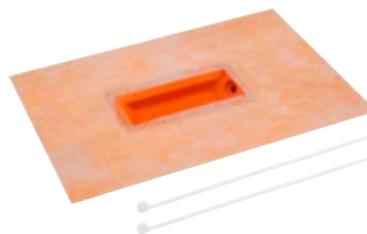

### Schlüter®-LIPROTEC-PZH

low-voltage hollow-wall box

| B x H x T (mm) | Art. No.    | £ / Set | P (Set) |
|----------------|-------------|---------|---------|
| 260 x 165 x 20 | LT PZ HD 35 | 25.47   | 10      |

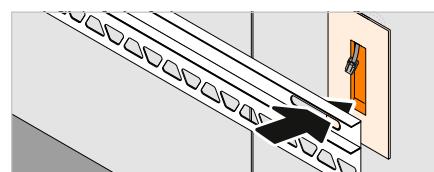

#### Note:

Strain relief is included in scope of supply.

## Tool

### Schlüter®-PROCUT-PSF

Schlüter-PROCUT-PSF is a special cutting tool for precisely cutting LED strips to size. To ensure that the LED strip retains IP-compliant tightness when it is shortened, it has to be cut at a 45° angle and sealed with the end caps and sealing adhesive included in the set.



### Schlüter®-PROCUT-PSF

profile cutter for profiles with joint spacer


| Art. No. | £ / U. | P (Unit) |
|----------|--------|----------|
| PSF      | 72.01  | 10       |



# PRO

With the plug-and-play sets from the EASY section, you can create a variety of individual light installations with ceramics and natural stone. But Schlüter-LIPROTEC offers a lot more. On the following pages, in the PRO section, you can combine profiles, LED strips, diffuser lenses, control equipment and accessories for individual projects.

On page 4 and 5, you can find an orientation aid for identifying which profile is suitable for which application.

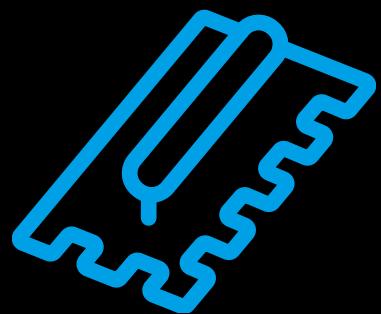

## PROFILES

|   | Page  |
|---|-------|
| LL – Linear light, coloured + white                                       | 22    |
| LLE – Linear light, coloured + white   Corner                             | 26    |
| WS – Wall panel lighting, coloured + white                                | 30    |
| WSK – Wall panel lighting with cable duct, coloured + white               | 34/58 |
| WSQ – Wall panel lighting with QUADEC finishing profile, coloured + white | 38    |
| PB – Stair edge lighting, white   | 42/60 |
| DESIGNBASE-QD – Landing/border profile, white                             | 46    |
| VB – Cove lighting, white   | 50    |
| D – Carrier profile for mirror, white                                     | 54/62 |

## ACCESSORIES

|                       |       |
|-----------------------|-------|
| Power supply units    | 64    |
| Installation material | 64–66 |
| Tool                  | 66    |


## KEY

|   |     |
|---|-----|
| Explanations of properties / Areas of application | 107 |
|---|-----|

LED controls can be found in the CONTROL section from page 68.



For technical information and properties, refer to the PLAN section starting on page 78.

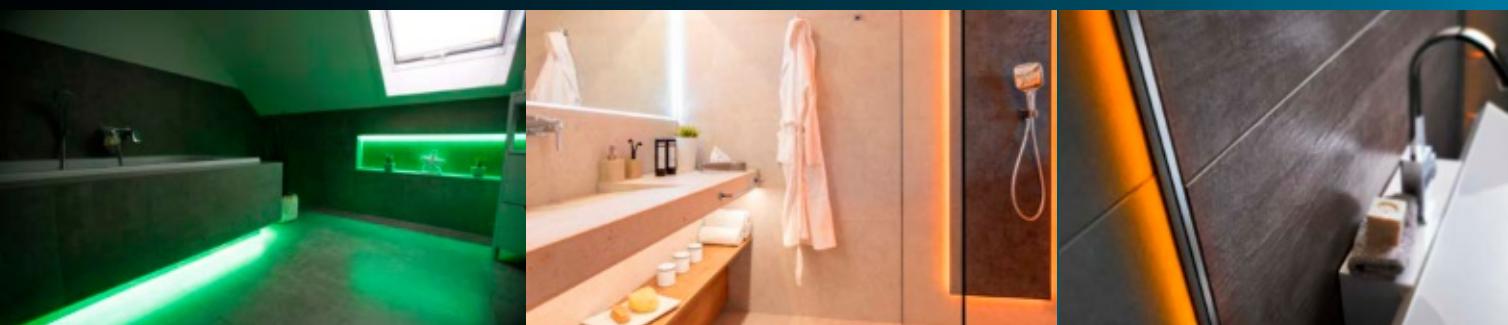

FIND OUT MORE AT:

LIPROTEC.CO.UK



## Schlüter®-LIPROTEC-LL

You can create a wide variety of individual, linear accent lighting with Schlüter-LIPROTEC-LL. With its discreet, U-formed section, LIPROTEC-LL is suitable for many different installation situations in new buildings and with renovations.





For explanations of the symbols, refer to page 107.

## A real multi-talent!

Schlüter-LIPROTEC-LL is a high quality, anodised aluminium carrier profile for creating accent lighting in wall coverings and ceilings. The illumination is provided by Schüter-LIPROTEC-ES LED strips laid into the U-shaped profile, in combination with the corresponding diffuser lens. Various direct or indirect light effects are created according to the positioning of the profile.



(Product data sheet 15.5)



## Application areas:

- ✓ Linear light borders
- ✓ Illuminated borders in wall coverings
- ✓ Illuminated niche constructions

- ① Schüter-LIPROTEC-LL profile
- ② LED strip
- ③ Diffuser lens (direct illumination)

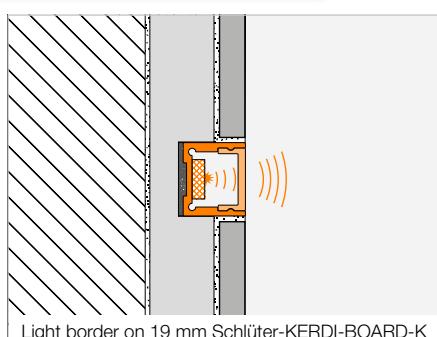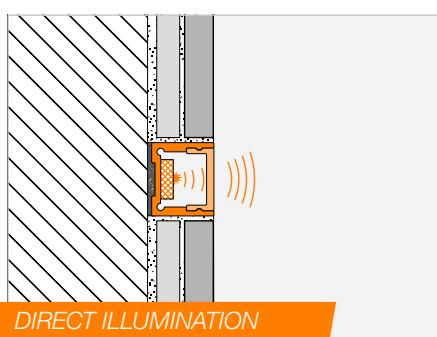


**Note:** Only suitable for vertical installation in showers.

For horizontal installation, we recommend our LED module LIPROTEC-LLPM on page 12.



## Schlüter®-LIPROTEC-LL


### Profile | linear light

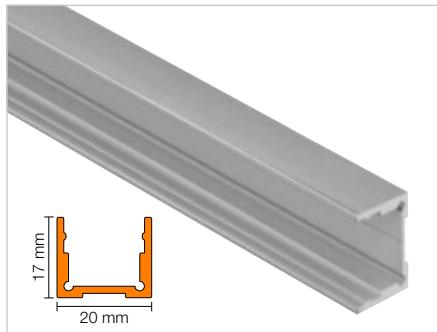

#### Schlüter®-LIPROTEC-LL


anodised aluminium

| L (m) | Art. No.      | £ / m        | KV (Unit) |
|-------|---------------|--------------|-----------|
| 2.5   | LT LL 2017 AE | <b>23.13</b> | 60        |

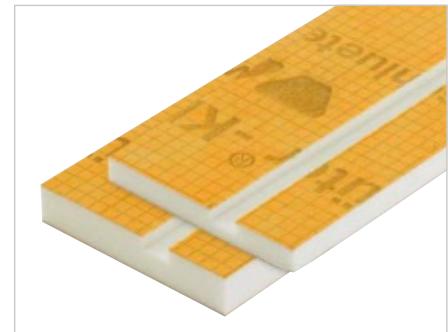

For simplified installation, we recommend our Schlüter-KERDI-BOARD-K installation modules on page 66.

### Diffuser lens

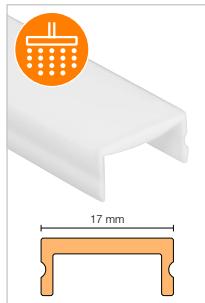

#### Schlüter®-LIPROTEC-WSI

diffuser lens, direct illumination

| L (m) | Art. No.   | £ / m        | KV (Unit) |
|-------|------------|--------------|-----------|
| 2.5   | LT WS I 20 | <b>19.29</b> | 60        |

### End cap



#### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, indirect illumination

| H (mm) | Art. No.           | £ / U.       | P (Unit) |
|--------|--------------------|--------------|----------|
| 17     | EK / LT WS I AE 20 | <b>15.08</b> | 50       |

### Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".

## RGB+W CONTROLLABLE

## WARM WHITE

## NEUTRAL WHITE

## LED strip



IP67



## Schlüter®-LIPROTEC-ES

LED strips, RGB+W controllable, 24 V, DC

| L (cm) | Art. No.    | £ / m         | P (Unit) |
|--------|-------------|---------------|----------|
| 50     | LT ES 9/50  | <b>113.02</b> | 10       |
| 100    | LT ES 9/100 | <b>104.42</b> | 10       |
| 150    | LT ES 9/150 | <b>104.42</b> | 10       |
| 200    | LT ES 9/200 | <b>98.28</b>  | 10       |
| 250    | LT ES 9     | <b>98.28</b>  | 10       |
| 400    | LT ES 9/400 | <b>94.99</b>  | 10       |

Max. length in the LIPROTEC system: 12 m,  
connection length: 3 m



IP67



## Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 11/50  | <b>79.92</b> | 10       |
| 100    | LT ES 11/100 | <b>70.65</b> | 10       |
| 150    | LT ES 11/150 | <b>66.59</b> | 10       |
| 200    | LT ES 11/200 | <b>60.80</b> | 10       |
| 250    | LT ES 11     | <b>57.91</b> | 10       |
| 400    | LT ES 11/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m



IP67



## Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 21/50  | <b>79.92</b> | 10       |
| 100    | LT ES 21/100 | <b>70.65</b> | 10       |
| 150    | LT ES 21/150 | <b>66.59</b> | 10       |
| 200    | LT ES 21/200 | <b>60.80</b> | 10       |
| 250    | LT ES 21     | <b>57.91</b> | 10       |
| 400    | LT ES 21/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Technical specifications for LED strips

## LT ES 9

|                             |                     |
|-----------------------------|---------------------|
| Dimensions (B x H)          | 15 x 5 mm           |
| Rated output (W/m)          | 15                  |
| Number of LED (u./m)        | 192 (96 RGB + 96 W) |
| Colour temperature (Kelvin) | RGB+W (2700 K)      |
| CRI                         | 85                  |

Can be shortened every 62.5 mm

## LT ES 11

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 3400 K    |
| CRI                         | 92        |




Can be shortened every 50 mm

## LT ES 21

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 4900 K    |
| CRI                         | 92        |

Can be shortened every 50 mm

## Application areas

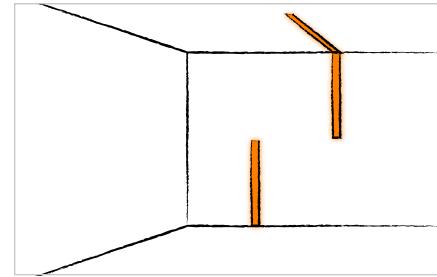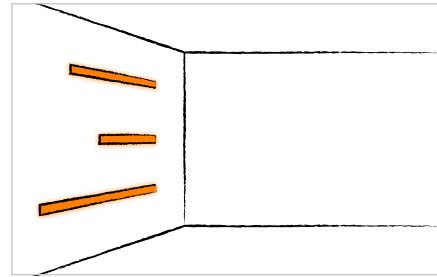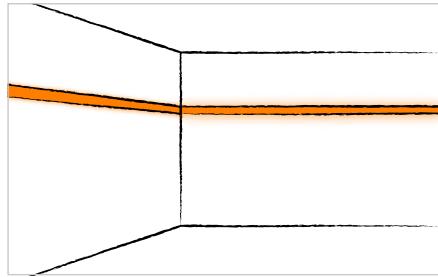



## Schlüter®-LIPROTEC-LLE

Accent lighting for tile surfaces and much more: Schlüter-LIPROTEC-LLE is our first light profile that can not only be embedded in tiling, but also be used on any other suitable substrate, thanks to an intelligent clip system. LIPROTEC-LLE can be used both for internal and external corners details, as well as in shower areas (if mounted vertically) – a true multi-talent.





For explanations of the symbols, refer to page 107.

## Re-imagine rooms

Schlüter-LIPROTEC-LLE is a high quality carrier profile made of anodised or white coated aluminium for mounting the Schlüter-LIPROTEC-ES LED strips. The profile is designed to create accent lighting in wall corners. It is suitable for use in internal and external corners in horizontal or vertical alignment. With the use of the respective pre-fabricated parts, it can also be installed continuously around corners. The profile can either be simply attached to any suitable substrate with a clip system or is embedded in the tile adhesive. For lighting, the selected LIPROTEC-ES LED strip is adhered within the profile and covered with the corresponding diffuser lens.


(Product data sheet 15.7)



- ① Schlüter-LIPROTEC-LLE profile
- ② LED strip
- ③ Diffuser lens (direct illumination)

## Application areas:

- ✓ Linear light, vertical in the shower
- ✓ Linear light along the ceiling
- ✓ Accent lighting on the corner

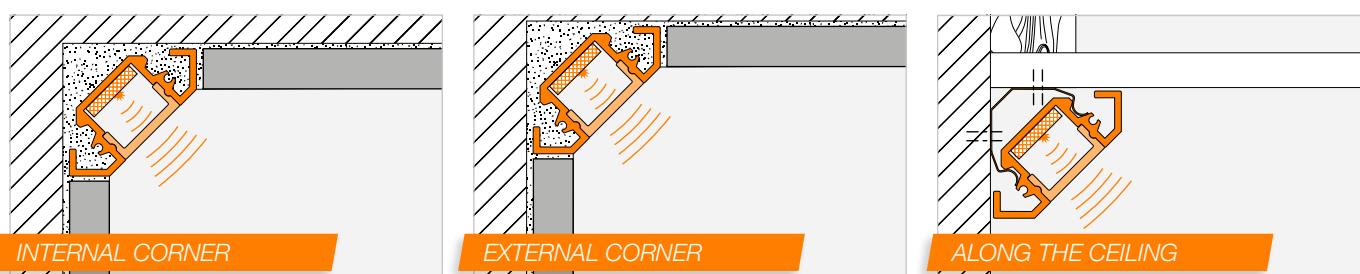


**Note:** Only suitable for vertical installation in showers.

For horizontal installation, we recommend our LED module LIPROTEC-LLPM on page 12.



# Schlüter®-LIPROTEC-LLE

## Profile | linear light | corner

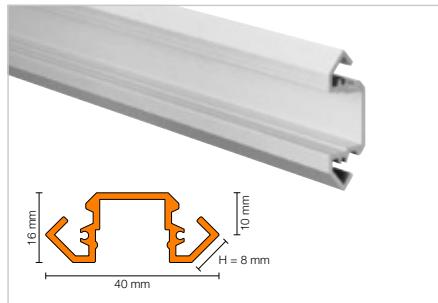

### Schlüter®-LIPROTEC-LLE

anodised aluminium


| H (mm) | L = 2.50 m<br>Art. No. | £ / m | KV (Unit) |
|--------|------------------------|-------|-----------|
| 8      | LT LLE 4016 AE         | 27.61 | 60        |

### Schlüter®-LIPROTEC-LLE-AC

colour coated aluminium, matte brilliant white

| H (mm) | L = 2.50 m<br>Art. No. | £ / m | KV (Unit) |
|--------|------------------------|-------|-----------|
| 8      | LT LLE 4016 MBW        | 29.39 | 60        |

## Diffuser lens | mounting aid

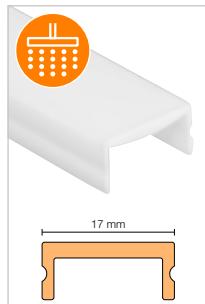

### Schlüter®-LIPROTEC-WSI

diffuser lens, direct illumination

| L (m) | Art. No.   | £ / m | KV (Unit) |
|-------|------------|-------|-----------|
| 2.5   | LT WS I 20 | 19.29 | 60        |



### Schlüter®-LIPROTEC-LLE/MK

installation clip

| Art. No.  | £ / Set | P (Set) |
|-----------|---------|---------|
| LT LLE MK | 4.63    | 50      |

#### Note:

Installation clip incl. attachment material;  
recommended installation clip spacing:  
every 50 cm.

## Corner | end cap



### Schlüter®-LIPROTEC-LLE/E

90° external corner, ABS appearance

| Art. No.        | £ / U. | P (Unit) |
|-----------------|--------|----------|
| E / LT LLE / AE | 6.05   | 50       |



### Schlüter®-LIPROTEC-LLE/I

90° internal corner, ABS appearance

| Art. No.        | £ / U. | P (Unit) |
|-----------------|--------|----------|
| I / LT LLE / AE | 6.05   | 50       |

### Schlüter®-LIPROTEC-LLE-AC/E

90° external corner, ABS

| Art. No.         | £ / U. | P (Unit) |
|------------------|--------|----------|
| E / LT LLE / MBW | 6.05   | 50       |

### Schlüter®-LIPROTEC-LLE-AC/I

90° internal corner, ABS

| Art. No.         | £ / U. | P (Unit) |
|------------------|--------|----------|
| I / LT LLE / MBW | 6.05   | 50       |



### Schlüter®-LIPROTEC-LLE/EK

end cap, anodised aluminium

| Art. No.         | £ / U. | P (Unit) |
|------------------|--------|----------|
| EK / LT LLE / AE | 13.51  | 50       |



### Schlüter®-LIPROTEC-LLE-AC/EK

end cap, colour coated aluminium, matte brilliant white

| Art. No.          | £ / U. | P (Unit) |
|-------------------|--------|----------|
| EK / LT LLE / MBW | 14.98  | 50       |

## Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".



## RGB+W CONTROLLABLE

## WARM WHITE

## NEUTRAL WHITE

## LED strip



## Schlüter®-LIPROTEC-ES

LED strips, RGB+W controllable, 24 V, DC

| L (cm) | Art. No.    | £ / m         | P (Unit) |
|--------|-------------|---------------|----------|
| 50     | LT ES 9/50  | <b>113.02</b> | 10       |
| 100    | LT ES 9/100 | <b>104.42</b> | 10       |
| 150    | LT ES 9/150 | <b>104.42</b> | 10       |
| 200    | LT ES 9/200 | <b>98.28</b>  | 10       |
| 250    | LT ES 9     | <b>98.28</b>  | 10       |
| 400    | LT ES 9/400 | <b>94.99</b>  | 10       |

Max. length in the LIPROTEC system: 12 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 11/50  | <b>79.92</b> | 10       |
| 100    | LT ES 11/100 | <b>70.65</b> | 10       |
| 150    | LT ES 11/150 | <b>66.59</b> | 10       |
| 200    | LT ES 11/200 | <b>60.80</b> | 10       |
| 250    | LT ES 11     | <b>57.91</b> | 10       |
| 400    | LT ES 11/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 21/50  | <b>79.92</b> | 10       |
| 100    | LT ES 21/100 | <b>70.65</b> | 10       |
| 150    | LT ES 21/150 | <b>66.59</b> | 10       |
| 200    | LT ES 21/200 | <b>60.80</b> | 10       |
| 250    | LT ES 21     | <b>57.91</b> | 10       |
| 400    | LT ES 21/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Technical specifications for LED strips

## LT ES 9

|                             |                     |
|-----------------------------|---------------------|
| Dimensions (B x H)          | 15 x 5 mm           |
| Rated output (W/m)          | 15                  |
| Number of LED (u./m)        | 192 (96 RGB + 96 W) |
| Colour temperature (Kelvin) | RGB+W (2700 K)      |
| CRI                         | 85                  |

Can be shortened every 62.5 mm

## LT ES 11

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 3400 K    |
| CRI                         | 92        |




Can be shortened every 50 mm

## LT ES 21

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 4900 K    |
| CRI                         | 92        |

Can be shortened every 50 mm

## Application areas

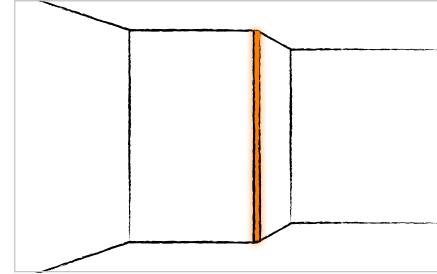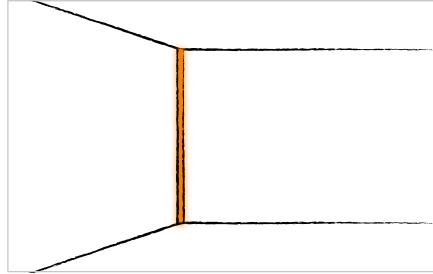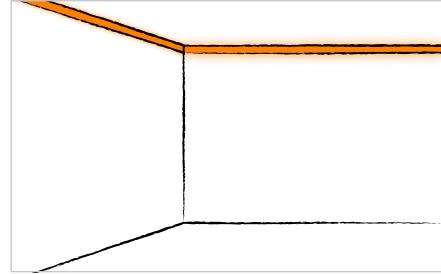



## Schlüter®-LIPROTEC-WS

Providing accent lighting of components and wall panels with atmospheric LED light is the domain of the trusted Schlüter-LIPROTEC-WS profile. They can be combined with diffuser lenses for either indirect or direct light to create individual light experiences in combination with exquisite tiles or natural stone.





For explanations of the symbols, refer to page 107.

## Building with light


Schlüter-LIPROTEC-WS is a high quality carrier profile of anodised aluminium for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.2)




## Application areas:

- ✓ Elements
- ✓ Wall panels
- ✓ On-wall features
- ✓ Cove lighting
- ✓ Light strips

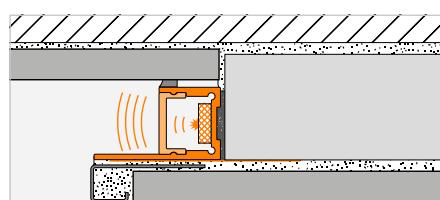

INDIRECT ILLUMINATION

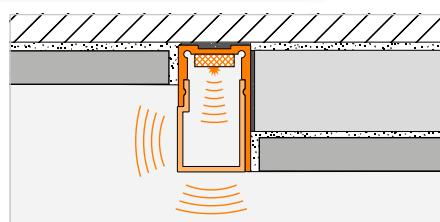

DIRECT ILLUMINATION



- ① Schlüter-LIPROTEC-WS profile
- ② LED strip
- ③ Diffuser lens (indirect illumination)
- ④ Diffuser lens (direct illumination)


**Note:** The diffuser lens for indirect lighting is only suitable for vertical installation in showers.

The diffuser lens for direct lighting is only suitable for installation outside of areas that are subjected to moisture.



# Schlüter®-LIPROTEC-WS

## Profile | wall panel

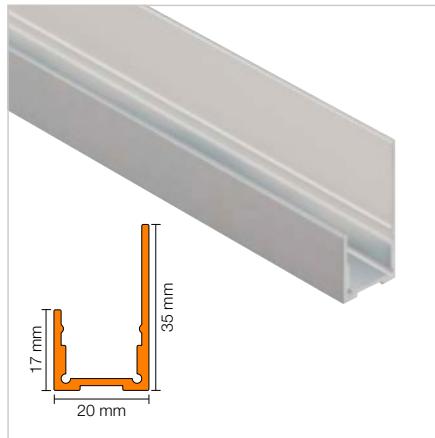

### Schlüter®-LIPROTEC-WS


anodised aluminium

| L (m) | Art. No.        | £ / m        | KV (Unit) |
|-------|-----------------|--------------|-----------|
| 1     | LT WS 20 AE/100 | <b>24.72</b> | 60        |
| 1.5   | LT WS 20 AE/150 | <b>24.72</b> | 60        |
| 2.5   | LT WS 20 AE     | <b>24.72</b> | 60        |



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 66).


## Diffuser lens

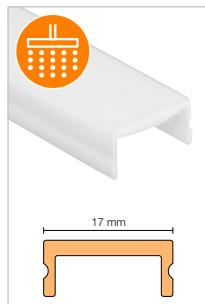

### Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

| L (m) | Art. No.       | £ / m        | KV (Unit) |
|-------|----------------|--------------|-----------|
| 1     | LT WS I 20/100 | <b>19.29</b> | 60        |
| 1.5   | LT WS I 20/150 | <b>19.29</b> | 60        |
| 2.5   | LT WS I 20     | <b>19.29</b> | 60        |

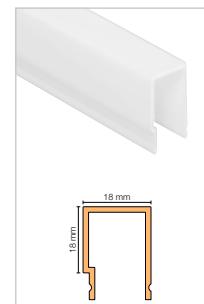

### Schlüter®-LIPROTEC-WSD

diffuser lens, direct illumination

| L (m) | Art. No.       | £ / m        | KV (Unit) |
|-------|----------------|--------------|-----------|
| 1     | LT WS D 20/100 | <b>22.30</b> | 60        |
| 1.5   | LT WS D 20/150 | <b>22.30</b> | 60        |
| 2.5   | LT WS D 20     | <b>22.30</b> | 60        |

## End cap



### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, indirect illumination

| H (mm) | Art. No.           | £ / U.       | P (Unit) |
|--------|--------------------|--------------|----------|
| 17     | EK / LT WS I AE 20 | <b>15.08</b> | 50       |



### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, direct illumination

| H (mm) | Art. No.           | £ / U.       | P (Unit) |
|--------|--------------------|--------------|----------|
| 35     | EK / LT WS D AE 20 | <b>16.18</b> | 50       |

## Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".



## RGB+W CONTROLLABLE

## WARM WHITE

## NEUTRAL WHITE

## LED strip



## Schlüter®-LIPROTEC-ES

LED strips, RGB+W controllable, 24 V, DC

| L (cm) | Art. No.    | £ / m         | P (Unit) |
|--------|-------------|---------------|----------|
| 50     | LT ES 9/50  | <b>113.02</b> | 10       |
| 100    | LT ES 9/100 | <b>104.42</b> | 10       |
| 150    | LT ES 9/150 | <b>104.42</b> | 10       |
| 200    | LT ES 9/200 | <b>98.28</b>  | 10       |
| 250    | LT ES 9     | <b>98.28</b>  | 10       |
| 400    | LT ES 9/400 | <b>94.99</b>  | 10       |

Max. length in the LIPROTEC system: 12 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 11/50  | <b>79.92</b> | 10       |
| 100    | LT ES 11/100 | <b>70.65</b> | 10       |
| 150    | LT ES 11/150 | <b>66.59</b> | 10       |
| 200    | LT ES 11/200 | <b>60.80</b> | 10       |
| 250    | LT ES 11     | <b>57.91</b> | 10       |
| 400    | LT ES 11/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 21/50  | <b>79.92</b> | 10       |
| 100    | LT ES 21/100 | <b>70.65</b> | 10       |
| 150    | LT ES 21/150 | <b>66.59</b> | 10       |
| 200    | LT ES 21/200 | <b>60.80</b> | 10       |
| 250    | LT ES 21     | <b>57.91</b> | 10       |
| 400    | LT ES 21/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Technical specifications for LED strips

## LT ES 9

|                             |                     |
|-----------------------------|---------------------|
| Dimensions (B x H)          | 15 x 5 mm           |
| Rated output (W/m)          | 15                  |
| Number of LED (u./m)        | 192 (96 RGB + 96 W) |
| Colour temperature (Kelvin) | RGB+W (2700 K)      |
| CRI                         | 85                  |

Can be shortened every 62.5 mm

## LT ES 11

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 3400 K    |
| CRI                         | 92        |




Can be shortened every 50 mm

## LT ES 21

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 4900 K    |
| CRI                         | 92        |

Can be shortened every 50 mm


## Application areas

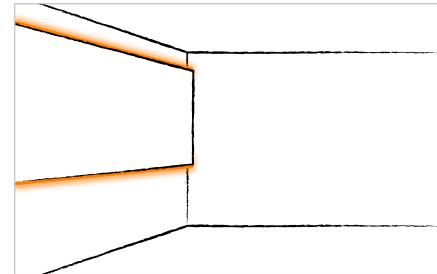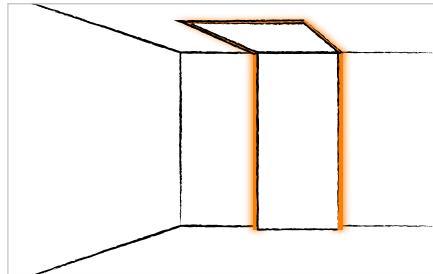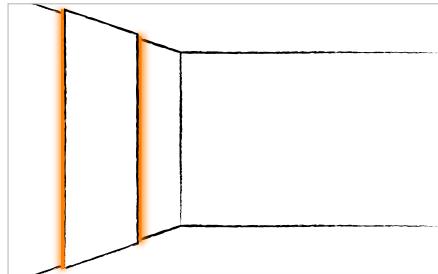



## Schlüter®-LIPROTEC-WSK

Thought-through light design: An integrated cable duct, a support bracket for the tried-and-tested KERDI-BOARD (19 mm), diffuser lenses for direct and indirect illumination as desired – we have equipped the LIPROTEC-WSK products with features that make installation easier. And give the owner of the building an individual light experience that provides joy day after day.

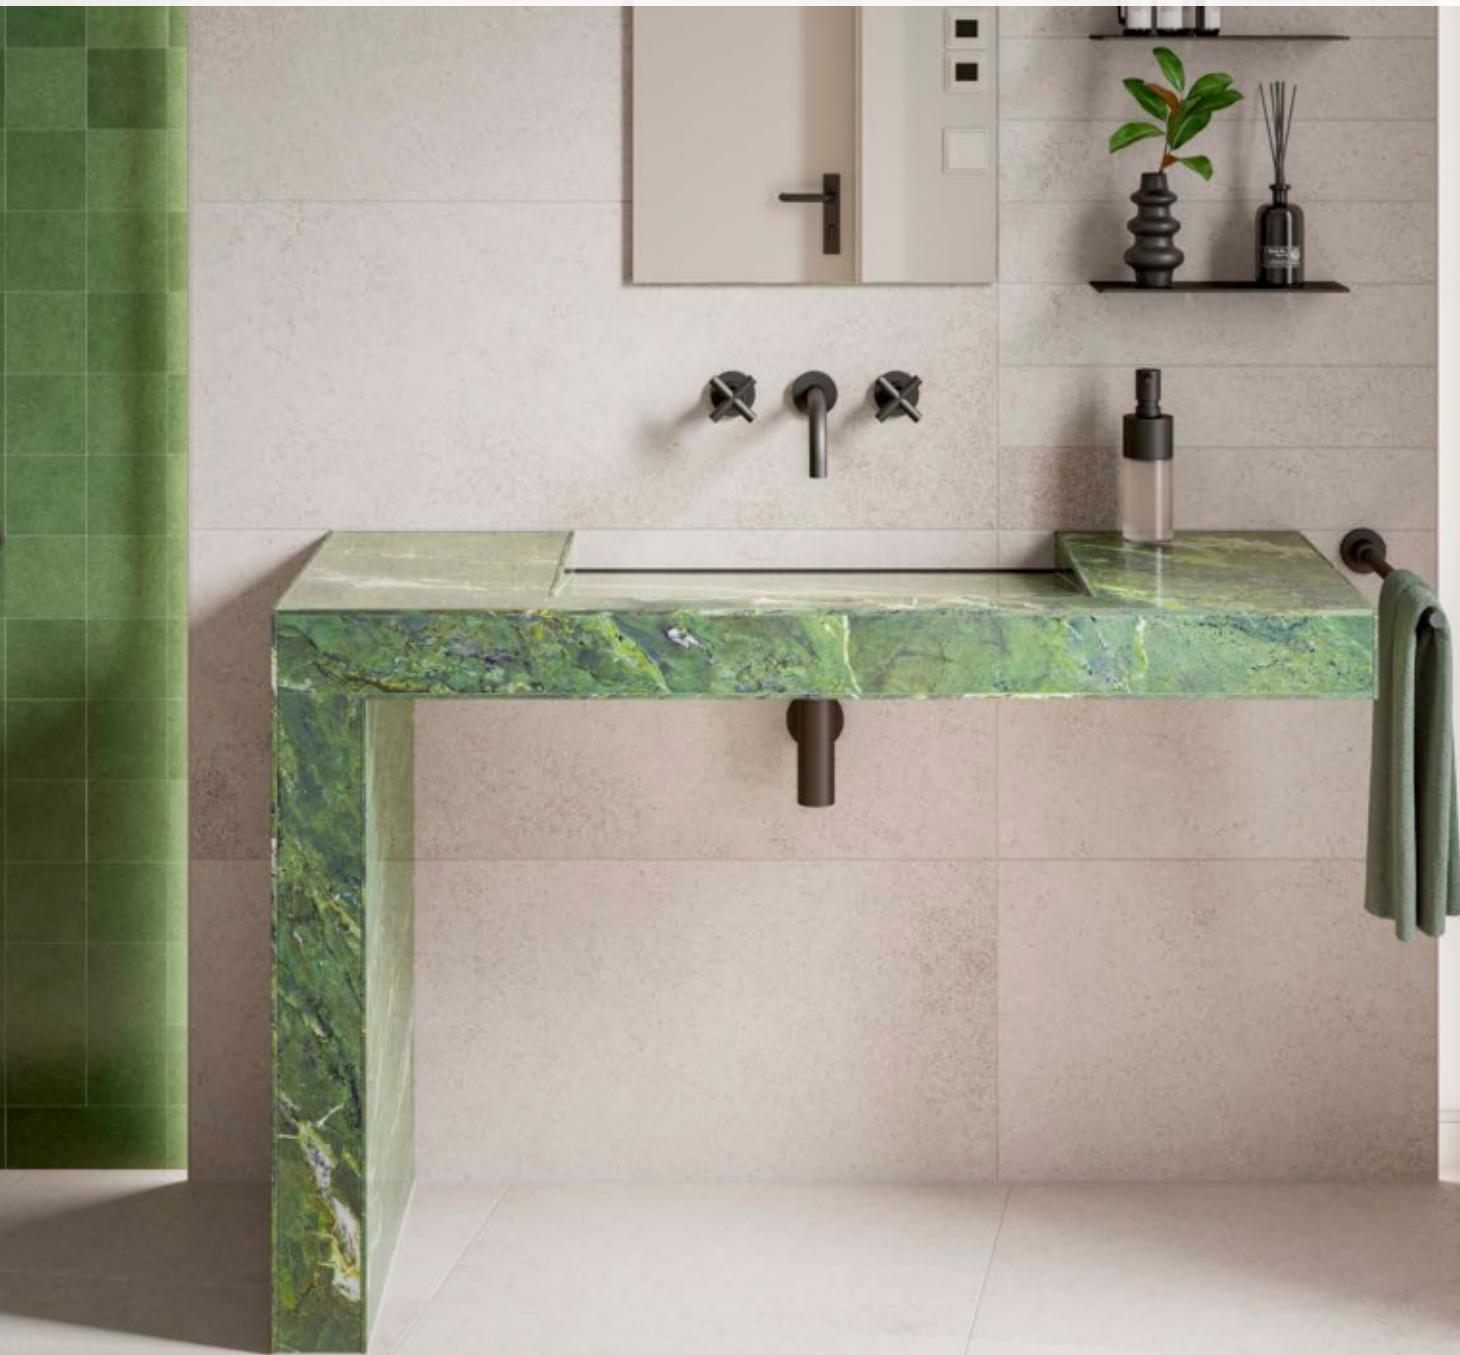



For explanations of the symbols, refer to page 107.

## Accentuate!

Schlüter-LIPROTEC-WSK is a high quality, anodised aluminium carrier profile for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips laid into the profile. Differing light effects are created in combination with two different diffuser lenses. Recessed, indirect or narrow illumination for wall protrusions are created in this way. An integrated cable duct with milling grooves for cable installation and a support bracket for Schlüter-KERDI-BOARD (19 mm) aid the installation process.

(Product data sheet 15.2)




## Application areas:

- ✓ Elements
- ✓ Wall panels
- ✓ On-wall features
- ✓ Cove lighting
- ✓ Light strips



- ① Schlüter-LIPROTEC-WSK profile
- ② LED strip
- ③ Diffuser lens (indirect illumination)

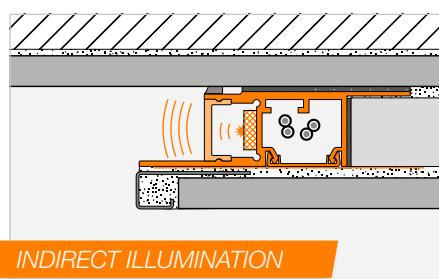


**Note:** The diffuser lens for indirect lighting is only suitable for vertical installation in showers. The diffuser lens for direct lighting is only suitable for installation outside of areas that are subjected to moisture.



## Schlüter®-LIPROTEC-WSK

### Profile | wall panel with cable duct

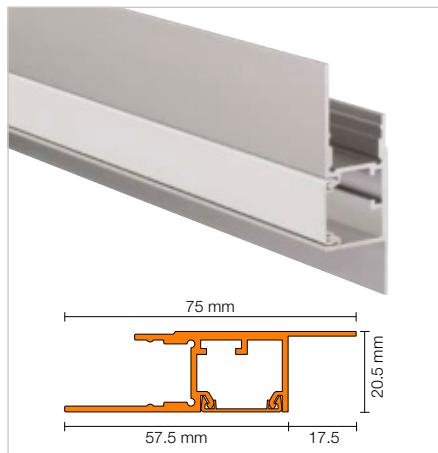

#### Schlüter®-LIPROTEC-WSK


anodised aluminium

| L (m) | Art. No.     | £ / m        | KV (Unit) |
|-------|--------------|--------------|-----------|
| 2.5   | WS 20 K1 AAE | <b>39.70</b> | 60        |



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 66).


### Diffuser lens

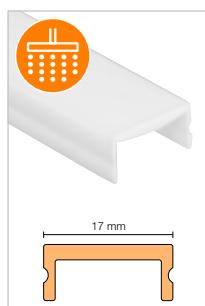

#### Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

| L (m) | Art. No.   | £ / m        | KV (Unit) |
|-------|------------|--------------|-----------|
| 2.5   | LT WS I 20 | <b>19.29</b> | 60        |

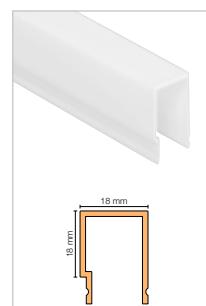

#### Schlüter®-LIPROTEC-WSD

diffuser lens, direct illumination

| L (m) | Art. No.   | £ / m        | KV (Unit) |
|-------|------------|--------------|-----------|
| 2.5   | LT WS D 20 | <b>22.30</b> | 60        |

### End cap



#### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, indirect illumination

| H (mm) | Art. No.           | £ / U.       | P (Unit) |
|--------|--------------------|--------------|----------|
| 17     | EK / LT WS I AE 20 | <b>15.08</b> | 50       |



#### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, direct illumination

| H (mm) | Art. No.           | £ / U.       | P (Unit) |
|--------|--------------------|--------------|----------|
| 35     | EK / LT WS D AE 20 | <b>16.18</b> | 50       |

### Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".



## RGB+W CONTROLLABLE

## WARM WHITE

## NEUTRAL WHITE

## LED strip



## Schlüter®-LIPROTEC-ES

LED strips, RGB+W controllable, 24 V, DC

| L (cm) | Art. No.    | £ / m         | P (Unit) |
|--------|-------------|---------------|----------|
| 50     | LT ES 9/50  | <b>113.02</b> | 10       |
| 100    | LT ES 9/100 | <b>104.42</b> | 10       |
| 150    | LT ES 9/150 | <b>104.42</b> | 10       |
| 200    | LT ES 9/200 | <b>98.28</b>  | 10       |
| 250    | LT ES 9     | <b>98.28</b>  | 10       |
| 400    | LT ES 9/400 | <b>94.99</b>  | 10       |

Max. length in the LIPROTEC system: 12 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 11/50  | <b>79.92</b> | 10       |
| 100    | LT ES 11/100 | <b>70.65</b> | 10       |
| 150    | LT ES 11/150 | <b>66.59</b> | 10       |
| 200    | LT ES 11/200 | <b>60.80</b> | 10       |
| 250    | LT ES 11     | <b>57.91</b> | 10       |
| 400    | LT ES 11/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 21/50  | <b>79.92</b> | 10       |
| 100    | LT ES 21/100 | <b>70.65</b> | 10       |
| 150    | LT ES 21/150 | <b>66.59</b> | 10       |
| 200    | LT ES 21/200 | <b>60.80</b> | 10       |
| 250    | LT ES 21     | <b>57.91</b> | 10       |
| 400    | LT ES 21/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Technical specifications for LED strips

## LT ES 9

|                             |                     |
|-----------------------------|---------------------|
| Dimensions (B x H)          | 15 x 5 mm           |
| Rated output (W/m)          | 15                  |
| Number of LED (u./m)        | 192 (96 RGB + 96 W) |
| Colour temperature (Kelvin) | RGB+W (2700 K)      |
| CRI                         | 85                  |

Can be shortened every 62.5 mm

## LT ES 11

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 3400 K    |
| CRI                         | 92        |




Can be shortened every 50 mm

## LT ES 21

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 4900 K    |
| CRI                         | 92        |

Can be shortened every 50 mm

## Application areas

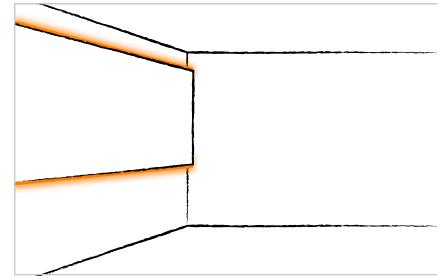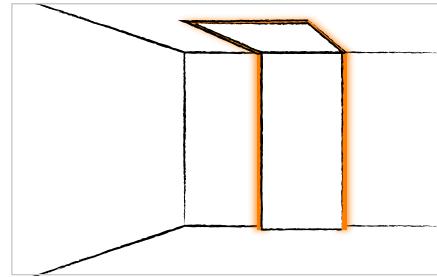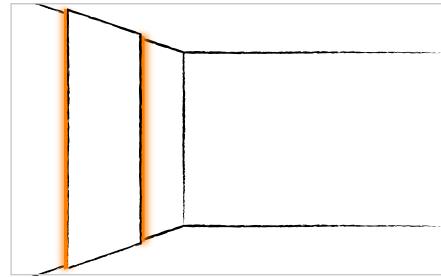



## Schlüter®-LIPROTEC-WSQ

Accent lighting with integrated cover finish: Schlüter-LIPROTEC-WSQ combines atmospheric LED illumination for bathtubs, prewall installations and wall panels with an elegant cover finish in timeless QUADEC design. Different diffuser lenses for indirect or direct light make it possible to use the LIPROTEC-WSQ for individual light design.





For explanations of the symbols, refer to page 107.

## Building with light



Schlüter-LIPROTEC-WSQ is a high quality carrier profile of anodised aluminium for illuminating raised wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. LIPROTEC-WSQ features a formed cover finish with timelessly modern Schlüter-QUADEC design. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.2)



## Application areas:

- ✓ Elements
- ✓ Wall panels
- ✓ On-wall features
- ✓ Cove lighting
- ✓ Light strips

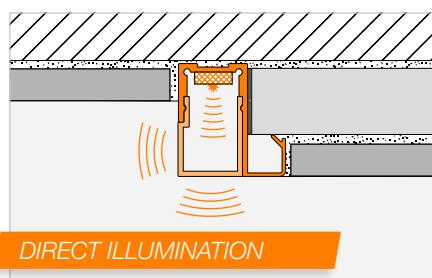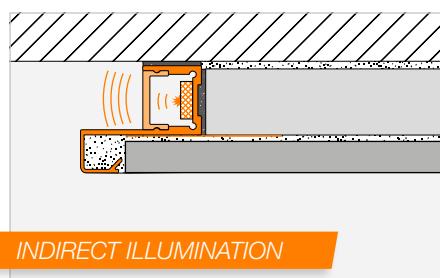

- 1 Schlüter-LIPROTEC-WSQ profile
- 2 LED strip
- 3 Diffuser lens (indirect illumination)
- 4 Diffuser lens (direct illumination)


**Note:** The diffuser lens for indirect lighting is only suitable for vertical installation in showers.

The diffuser lens for direct lighting is only suitable for installation outside of areas that are subjected to moisture.



## Schlüter®-LIPROTEC-WSQ

### Profile | wall panel with QUADEC finishing profile

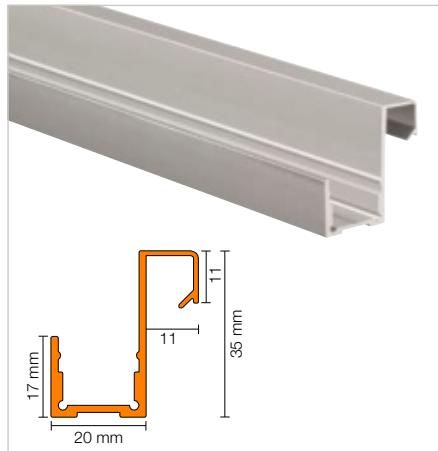

#### Schlüter®-LIPROTEC-WSQ


anodised aluminium, H = 11 mm

| L (m) | Art. No.      | £ / m        | KV (Unit) |
|-------|---------------|--------------|-----------|
| 2.5   | WS 20Q 110 AE | <b>33.72</b> | 60        |



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 66).


### Diffuser lens

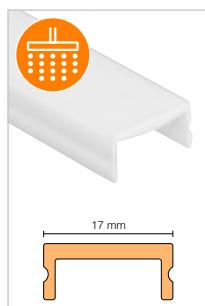

#### Schlüter®-LIPROTEC-WSI

diffuser lens, indirect illumination

| L (m) | Art. No.   | £ / m        | KV (Unit) |
|-------|------------|--------------|-----------|
| 2.5   | LT WS I 20 | <b>19.29</b> | 60        |

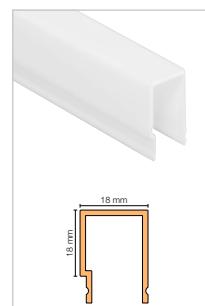

#### Schlüter®-LIPROTEC-WSD

diffuser lens, direct illumination

| L (m) | Art. No.   | £ / m        | KV (Unit) |
|-------|------------|--------------|-----------|
| 2.5   | LT WS D 20 | <b>22.30</b> | 60        |

### End cap



#### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, indirect illumination

| H (mm) | Art. No.           | £ / U.       | P (Unit) |
|--------|--------------------|--------------|----------|
| 17     | EK / LT WS I AE 20 | <b>15.08</b> | 50       |



#### Schlüter®-LIPROTEC-WS/EK

end cap, anodised aluminium, direct illumination

| H (mm) | Art. No.           | £ / U.       | P (Unit) |
|--------|--------------------|--------------|----------|
| 35     | EK / LT WS D AE 20 | <b>16.18</b> | 50       |

### Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".



## RGB+W CONTROLLABLE

## WARM WHITE

## NEUTRAL WHITE

## LED strip



## Schlüter®-LIPROTEC-ES

LED strips, RGB+W controllable, 24 V, DC

| L (cm) | Art. No.    | £ / m         | P (Unit) |
|--------|-------------|---------------|----------|
| 50     | LT ES 9/50  | <b>113.02</b> | 10       |
| 100    | LT ES 9/100 | <b>104.42</b> | 10       |
| 150    | LT ES 9/150 | <b>104.42</b> | 10       |
| 200    | LT ES 9/200 | <b>98.28</b>  | 10       |
| 250    | LT ES 9     | <b>98.28</b>  | 10       |
| 400    | LT ES 9/400 | <b>94.99</b>  | 10       |

Max. length in the LIPROTEC system: 12 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 11/50  | <b>79.92</b> | 10       |
| 100    | LT ES 11/100 | <b>70.65</b> | 10       |
| 150    | LT ES 11/150 | <b>66.59</b> | 10       |
| 200    | LT ES 11/200 | <b>60.80</b> | 10       |
| 250    | LT ES 11     | <b>57.91</b> | 10       |
| 400    | LT ES 11/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m



## Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 21/50  | <b>79.92</b> | 10       |
| 100    | LT ES 21/100 | <b>70.65</b> | 10       |
| 150    | LT ES 21/150 | <b>66.59</b> | 10       |
| 200    | LT ES 21/200 | <b>60.80</b> | 10       |
| 250    | LT ES 21     | <b>57.91</b> | 10       |
| 400    | LT ES 21/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Technical specifications for LED strips

## LT ES 9

|                             |                     |
|-----------------------------|---------------------|
| Dimensions (B x H)          | 15 x 5 mm           |
| Rated output (W/m)          | 15                  |
| Number of LED (u./m)        | 192 (96 RGB + 96 W) |
| Colour temperature (Kelvin) | RGB+W (2700 K)      |
| CRI                         | 85                  |

Can be shortened every 62.5 mm

## LT ES 11

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 3400 K    |
| CRI                         | 92        |



Can be shortened every 50 mm

## LT ES 21

|                             |           |
|-----------------------------|-----------|
| Dimensions (B x H)          | 12 x 5 mm |
| Rated output (W/m)          | 7.5       |
| Number of LED (u./m)        | 140       |
| Colour temperature (Kelvin) | 4900 K    |
| CRI                         | 92        |

Can be shortened every 50 mm

## Application areas

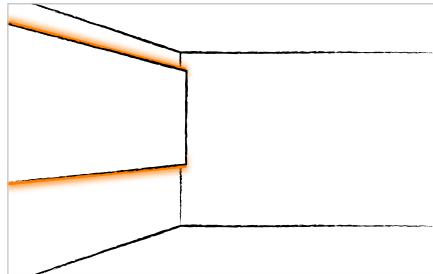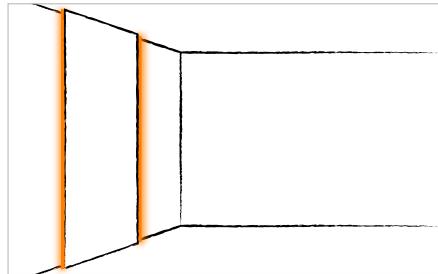



## Schlüter®-LIPROTEC-PB

Schlüter-LIPROTEC-PB is our universal solution for illuminated step edges. From highlighting steps in a lobby to giving a reception desk a "floating" appearance, there are thousands of applications for the intelligent illumination technology of Schlüter-Systems. For step edges, combine LIPROTEC-PB with high-quality Schlüter-TREP profiles. For staircases, we recommend our sets on page 60.





For explanations of the symbols, refer to page 107.

## Step-by-step illumination




Schlüter-LIPROTEC-PB is a high quality edge profile of anodised aluminium with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used with Schlüter-TREP stair nosing profiles to create appealing lighting along the edges of platforms. Differing light effects are created in combination with two different diffuser lenses. Edges can either be illuminated indirectly or directly by adding a 3 mm light strip. Another application area of LIPROTEC-PB is the direct or indirect illumination of work surface front edges. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.4)



## Application areas:

- ✓ Platform step edges

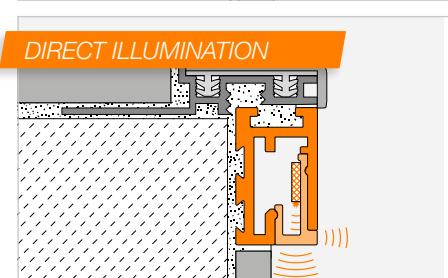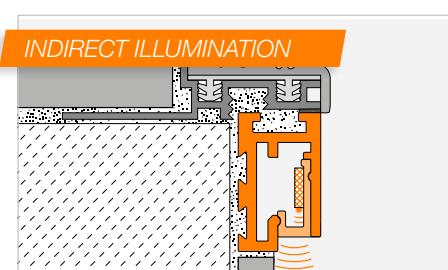

- 1 Schlüter-LIPROTEC-PB profile
- 2 LED strip
- 3 Diffuser lens (indirect illumination)
- 4 Diffuser lens (direct illumination)



## Schlüter®-LIPROTEC-PB

### Profile | stair edge



#### Schlüter®-LIPROTEC-PB

anodised aluminium


| L (m) | Art. No.        | £ / m        | KV (Unit) |
|-------|-----------------|--------------|-----------|
| 1     | LT PB 25 AE/100 | <b>28.26</b> | 60        |
| 1.5   | LT PB 25 AE/150 | <b>28.26</b> | 60        |
| 2.5   | LT PB 25 AE     | <b>28.26</b> | 60        |

#### Schlüter®-LIPROTEC-PB-AEEB

brushed stainless steel appearance,  
anodised aluminium

| L (m) | Art. No.          | £ / m        | KV (Unit) |
|-------|-------------------|--------------|-----------|
| 1     | LT PB 25 AEEB/100 | <b>33.33</b> | 60        |
| 1.5   | LT PB 25 AEEB/150 | <b>33.33</b> | 60        |
| 2.5   | LT PB 25 AEEB     | <b>33.33</b> | 60        |


### Diffuser lens



#### Schlüter®-LIPROTEC-VBI

diffuser lens, indirect illumination

| L (m) | Art. No.    | £ / m        | KV (Unit) |
|-------|-------------|--------------|-----------|
| 1     | LT VB I/100 | <b>18.94</b> | 60        |
| 1.5   | LT VB I/150 | <b>18.94</b> | 60        |
| 2.5   | LT VB I     | <b>18.94</b> | 60        |



#### Schlüter®-LIPROTEC-PBD

diffuser lens, indirect + direct illumination

| L (m) | Art. No.    | £ / m        | KV (Unit) |
|-------|-------------|--------------|-----------|
| 1     | LT PB D/100 | <b>19.05</b> | 60        |
| 1.5   | LT PB D/150 | <b>19.05</b> | 60        |
| 2.5   | LT PB D     | <b>19.05</b> | 60        |

### End cap



#### Schlüter®-LIPROTEC-PB/EK

end cap, anodised aluminium

| Art. No.      | £ / U.      | P (Unit) |
|---------------|-------------|----------|
| EK / LT PB AE | <b>4.82</b> | 50       |



#### Schlüter®-LIPROTEC-PB-AEEB/EK

end cap,  
brushed stainless steel effect anodised aluminium

| Art. No.        | £ / U.      | P (Unit) |
|-----------------|-------------|----------|
| EK / LT PB AEEB | <b>5.63</b> | 50       |

**Note:** Matching corner connectors can be found on page 56.

### Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".

## WARM WHITE

## NEUTRAL WHITE

## LED strip



IP65



IP65



## Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 51/50  | <b>81.09</b> | 10       |
| 100    | LT ES 51/100 | <b>71.82</b> | 10       |
| 150    | LT ES 51/150 | <b>64.87</b> | 10       |
| 200    | LT ES 51/200 | <b>61.39</b> | 10       |
| 250    | LT ES 51     | <b>59.06</b> | 10       |
| 400    | LT ES 51/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 61/50  | <b>81.09</b> | 10       |
| 100    | LT ES 61/100 | <b>71.82</b> | 10       |
| 150    | LT ES 61/150 | <b>64.87</b> | 10       |
| 200    | LT ES 61/200 | <b>61.39</b> | 10       |
| 250    | LT ES 61     | <b>59.06</b> | 10       |
| 400    | LT ES 61/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Technical specifications for LED strips

## LT ES 5 1

|                             |            |
|-----------------------------|------------|
| Dimensions (B x H)          | 8 x 2.5 mm |
| Rated output (W/m)          | 7.5        |
| Number of LED (u./m)        | 140        |
| Colour temperature (Kelvin) | 3200 K     |
| CRI                         | 92         |


Can be shortened every 50 mm

## LT ES 6 1

|                             |            |
|-----------------------------|------------|
| Dimensions (B x H)          | 8 x 2.5 mm |
| Rated output (W/m)          | 7.5        |
| Number of LED (u./m)        | 140        |
| Colour temperature (Kelvin) | 4900 K     |
| CRI                         | 92         |

Can be shortened every 50 mm

## Application areas

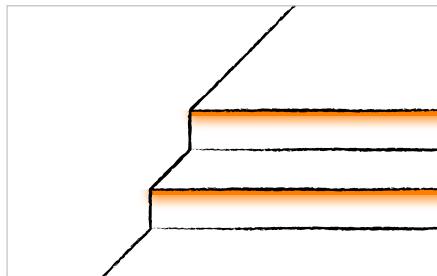



## Schlüter®-DESIGNBASE-QD

Timeless QUADEC design combined with modern LED technology: With Schlüter-DESIGNBASE-QD, illuminated skirtings and borders can be installed with ease. Create illuminated finishes for worktops or wall structures made of stud frame constructions or Schlüter-KERDI-BOARD in next to no time.





For explanations of the symbols, refer to page 107.


## Defined by light

Schlüter-DESIGNBASE-QD is a high quality profile of anodised aluminium for versatile applications. It is designed for mounting various Schlüter-LIPROTEC-ES LED strips as a skirting or border profile in wall areas. A 39 mm diffuser lens is then used between the 10 mm wide (approx.) visible areas of the profile to create direct illumination. Other decorative materials such as tiles or wooden elements can also be inserted in the open space. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 16.1)

## Application areas:

- ✓ Skirting
- ✓ Illuminated borders in wall coverings

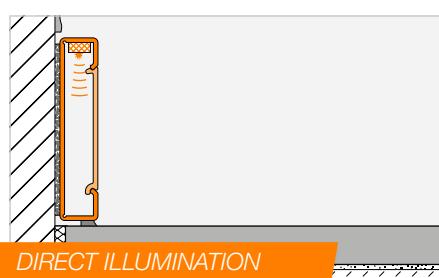


**Note:** Only suitable for vertical installation in showers.

For horizontal installation, we recommend our LED module LIPROTEC-LLPM on page 12.




- ➊ Profile AE



## Schlüter®-DESIGNBASE-QD

### Profile | base/border

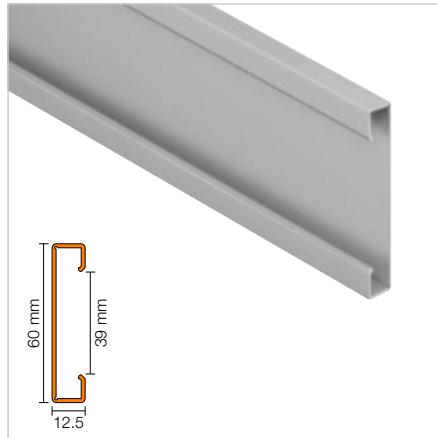

#### Schlüter®-DESIGNBASE-QD

anodised aluminium

| L (m) | Art. No. | £ / m        | KV (Unit) |
|-------|----------|--------------|-----------|
| 2.5   | DB Q1 AE | <b>33.34</b> | 60        |

#### Schlüter®-DESIGNBASE-QD-AEEB


brushed stainless steel appearance,  
anodised aluminium

| L (m) | Art. No.   | £ / m        | KV (Unit) |
|-------|------------|--------------|-----------|
| 2.5   | DB Q1 AEEB | <b>40.27</b> | 60        |



To achieve adhesive bonding between the smooth aluminium surface and the tile, the self-adhesive fleece Schlüter-DESIGNBASE-HVL 38/20M is fitted (see page 66).

### Diffuser lens

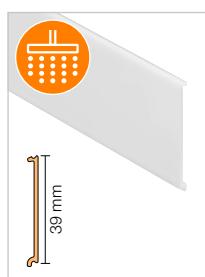

#### Schlüter®-DESIGNBASE-QDD

diffuser lens

| H (mm) | L = 2.50 m<br>Art. No. | £ / m        | KV (Unit) |
|--------|------------------------|--------------|-----------|
| 39     | LT FSS 39              | <b>19.92</b> | 60        |



To prevent a disruption of the light effect, the Schlüter-LIPROTEC-RKB self-adhesive, reflective tape is placed over drill holes or cables (see page 66).

### End cap



#### Schlüter®-DESIGNBASE-QD/E

external corner, anodised aluminium

| Art. No.      | £ / U.       | P (Unit) |
|---------------|--------------|----------|
| EV / DB Q1 AE | <b>29.45</b> | 50       |



#### Schlüter®-DESIGNBASE-QD-AEEB/E

external corner,  
brushed stainless steel effect anodised aluminium

| Art. No.        | £ / U.       | P (Unit) |
|-----------------|--------------|----------|
| EV / DB Q1 AEEB | <b>35.49</b> | 50       |

### Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".

## WARM WHITE

## NEUTRAL WHITE

## LED strip



IP67



IP67



## Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 31/50  | <b>79.92</b> | 10       |
| 100    | LT ES 31/100 | <b>70.65</b> | 10       |
| 150    | LT ES 31/150 | <b>66.59</b> | 10       |
| 200    | LT ES 31/200 | <b>60.80</b> | 10       |
| 250    | LT ES 31     | <b>57.91</b> | 10       |
| 400    | LT ES 31/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 41/50  | <b>79.92</b> | 10       |
| 100    | LT ES 41/100 | <b>70.65</b> | 10       |
| 150    | LT ES 41/150 | <b>66.59</b> | 10       |
| 200    | LT ES 41/200 | <b>60.80</b> | 10       |
| 250    | LT ES 41     | <b>57.91</b> | 10       |
| 400    | LT ES 41/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

## Technical specifications for LED strips

## LT ES 3 1

|                             |          |
|-----------------------------|----------|
| Dimensions (B x H)          | 7 x 5 mm |
| Rated output (W/m)          | 7.5      |
| Number of LED (u./m)        | 140      |
| Colour temperature (Kelvin) | 3400 K   |
| CRI                         | 92       |




Can be shortened every 50 mm

## LT ES 4 1

|                             |          |
|-----------------------------|----------|
| Dimensions (B x H)          | 7 x 5 mm |
| Rated output (W/m)          | 7.5      |
| Number of LED (u./m)        | 140      |
| Colour temperature (Kelvin) | 4900 K   |
| CRI                         | 92       |

Can be shortened every 50 mm

## Application areas

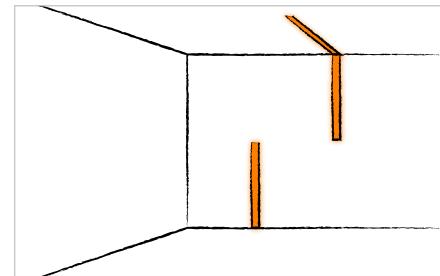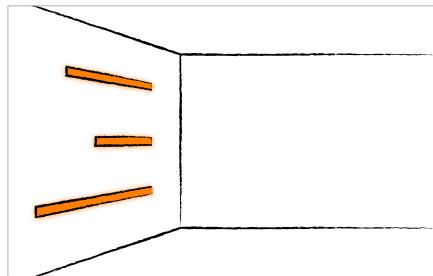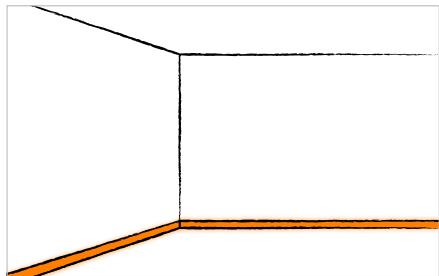



## Schlüter®-LIPROTEC-VB

Schlüter-LIPROTEC-VB not only is an elegant aluminium finishing profile for tiling – it also allows for integration of decorative accents in the tiling: for example by lighting the ceiling indirectly or as an illuminated guiding strip on the skirting tiles. Four different heights are available. Thanks to the installation height of just 3.5 mm, the Sideview-LED strips specifically designed for Schlüter-Systems are suitable for particularly detailed arrangements and lighting effects.





For explanations of the symbols, refer to page 107.




## Light from within the tile!

Schlüter-LIPROTEC-VB is a high quality tile finishing profile for wall areas, with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used to create varying light effects in combination with two different diffuser lenses. Indirect light can either radiate from the profile edge to the ceiling via adjoining materials or along the skirting. Additionally, a 3 mm light strip can create direct light. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.1)

## Application areas:

- ✓ Wall coverings
- ✓ Skirting

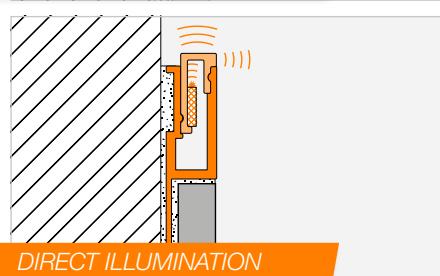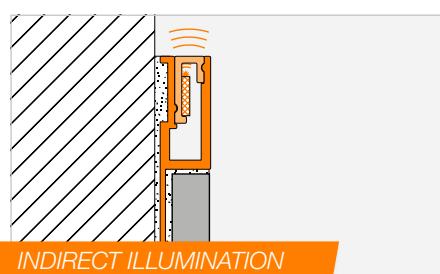


- ① Schlüter-LIPROTEC-VB profile
- ② LED strip
- ③ Diffuser lens (indirect illumination)
- ④ Diffuser lens (direct illumination)



## Schlüter®-LIPROTEC-VB

### Profile | cove lighting

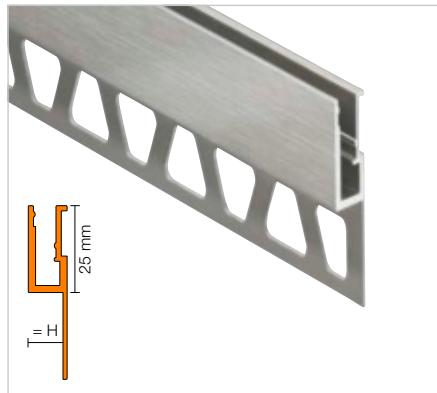

#### Schlüter®-LIPROTEC-VB

anodised aluminium


| H (mm) | L = 2.50 m<br>Art. No. | £ / m        | KV (Unit) |
|--------|------------------------|--------------|-----------|
| 8      | LT VB 80 AE            | <b>24.72</b> | 60        |
| 10     | LT VB 100 AE           | <b>25.64</b> | 60        |
| 11     | LT VB 110 AE           | <b>26.33</b> | 60        |
| 12.5   | LT VB 125 AE           | <b>27.33</b> | 60        |

#### Schlüter®-LIPROTEC-VB-AEEB

brushed stainless steel appearance,  
anodised aluminium

| H (mm) | L = 2.50 m<br>Art. No. | £ / m        | KV (Unit) |
|--------|------------------------|--------------|-----------|
| 8      | LT VB 80 AEEB          | <b>29.54</b> | 60        |
| 10     | LT VB 100 AEEB         | <b>30.47</b> | 60        |
| 11     | LT VB 110 AEEB         | <b>31.30</b> | 60        |
| 12.5   | LT VB 125 AEEB         | <b>32.70</b> | 60        |


### Diffuser lens

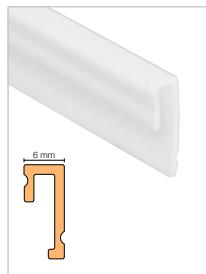

#### Schlüter®-LIPROTEC-VBI

diffuser lens, indirect illumination

| L (m) | Art. No. | £ / m        | KV (Unit) |
|-------|----------|--------------|-----------|
| 2.5   | LT VB I  | <b>18.94</b> | 60        |

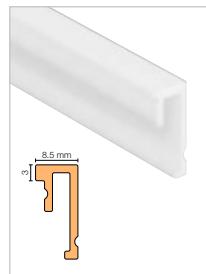

#### Schlüter®-LIPROTEC-VBD

diffuser lens, direct illumination

| L (m) | Art. No. | £ / m        | KV (Unit) |
|-------|----------|--------------|-----------|
| 2.5   | LT VB D  | <b>18.94</b> | 60        |

**Note:** The cable feed of the LED strip that radiates light sideways is always on one side only, at the right. The light shines upward.

### Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".



### LED strip



### Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 51/50  | <b>81.09</b> | 10       |
| 100    | LT ES 51/100 | <b>71.82</b> | 10       |
| 150    | LT ES 51/150 | <b>64.87</b> | 10       |
| 200    | LT ES 51/200 | <b>61.39</b> | 10       |
| 250    | LT ES 51     | <b>59.06</b> | 10       |
| 400    | LT ES 51/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

### Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 61/50  | <b>81.09</b> | 10       |
| 100    | LT ES 61/100 | <b>71.82</b> | 10       |
| 150    | LT ES 61/150 | <b>64.87</b> | 10       |
| 200    | LT ES 61/200 | <b>61.39</b> | 10       |
| 250    | LT ES 61     | <b>59.06</b> | 10       |
| 400    | LT ES 61/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

### Technical specifications for LED strips

#### LT ES 5 1

|                             |            |
|-----------------------------|------------|
| Dimensions (B x H)          | 8 x 2.5 mm |
| Rated output (W/m)          | 7.5        |
| Number of LED (u./m)        | 140        |
| Colour temperature (Kelvin) | 3200 K     |
| CRI                         | 92         |



Can be shortened every 50 mm

#### LT ES 6 1

|                             |            |
|-----------------------------|------------|
| Dimensions (B x H)          | 8 x 2.5 mm |
| Rated output (W/m)          | 7.5        |
| Number of LED (u./m)        | 140        |
| Colour temperature (Kelvin) | 4900 K     |
| CRI                         | 92         |

Can be shortened every 50 mm

### Application areas

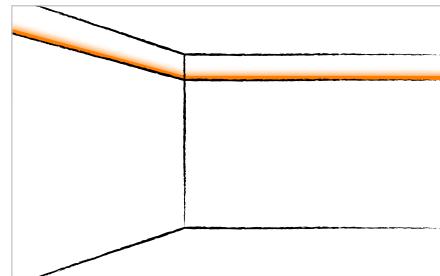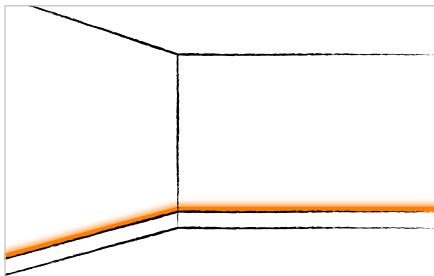

## Schlüter®-LIPROTEC-D

Schlüter-LIPROTEC-D provides accent lighting for design elements on the wall. Whether you want to highlight decorative elements, borders, pictures or mirrors, create a simple shadow joint, or set accents with indirect light – LIPROTEC-D offers solutions that are as individual and flexible as you are. For a really simple solution, we've put together a frame set for you with dimensions of 118.5 x 93.5 cm, with clean mitre cuts and with power supply unit, LED strips and mounting material. All you need is a suitable mirror or a decorative element.





For explanations of the symbols, refer to page 107.

## Properly framed!

Schlüter-LIPROTEC-D is a decorative carrier profile for wall areas of anodised aluminium with a visible area of 6 mm. It allows for the insertion of various decorative materials such as glass or mirrors to adjoin ceramic tile coverings. LIPROTEC-D can be used to mount Schlüter-LIPROTEC-ES LED strips for creating indirect light effects around a decorative element. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.

(Product data sheet 15.3)




## Application areas:

- ✓ Mirror
- ✓ Decorative elements made of various materials




- ① Schlüter-LIPROTEC-D profile
- ② LED strip

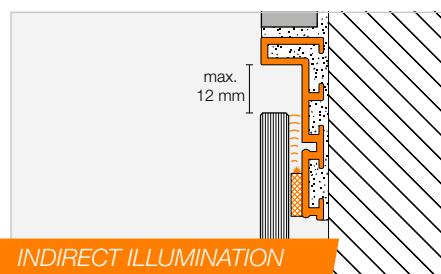



# Schlüter®-LIPROTEC-D

## Profile | attachment profile for decorative materials

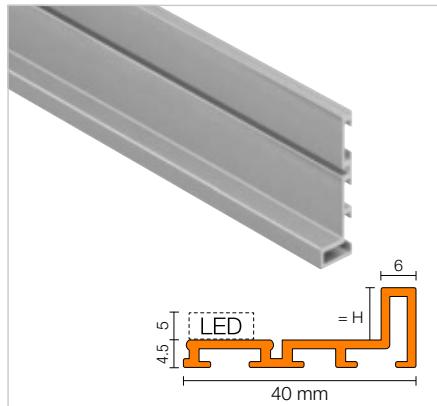

### Schlüter®-LIPROTEC-D

anodised aluminium

| H (mm) | L = 2.50 m<br>Art. No. | £ / m        | KV (Unit) |
|--------|------------------------|--------------|-----------|
| 4.5    | LT D 45 AE             | <b>26.91</b> | 60        |
| 7.5    | LT D 75 AE             | <b>27.17</b> | 60        |
| 9      | LT D 90 AE             | <b>29.47</b> | 60        |
| 16.5   | LT D 165 AE            | <b>30.37</b> | 60        |



### Selection of profile height:

5 mm must be added for the height of the LED strip LT ES 51 or LT ES 61. The profile LT D 45 AE with an intake height of 4.5 mm is recommended for the insertion of non-illuminated decorative materials.

## Corner connector



### Schlüter®-LIPROTEC-D/V

corner connector set, 4 pc.

| Art. No.       | £ / Set      | P (Set) |
|----------------|--------------|---------|
| V 90 / LT 10/4 | <b>12.95</b> | 50      |



2 x corner connectors are required for each frame corner.

## Control | accessories



In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting and power supply units and installation material under "Accessories".



### LED strip



IP65



IP65



### Schlüter®-LIPROTEC-ES

LED strips, warm white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 51/50  | <b>81.09</b> | 10       |
| 100    | LT ES 51/100 | <b>71.82</b> | 10       |
| 150    | LT ES 51/150 | <b>64.87</b> | 10       |
| 200    | LT ES 51/200 | <b>61.39</b> | 10       |
| 250    | LT ES 51     | <b>59.06</b> | 10       |
| 400    | LT ES 51/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

### Schlüter®-LIPROTEC-ES

LED strips, neutral white, 24 V, DC

| L (cm) | Art. No.     | £ / m        | P (Unit) |
|--------|--------------|--------------|----------|
| 50     | LT ES 61/50  | <b>81.09</b> | 10       |
| 100    | LT ES 61/100 | <b>71.82</b> | 10       |
| 150    | LT ES 61/150 | <b>64.87</b> | 10       |
| 200    | LT ES 61/200 | <b>61.39</b> | 10       |
| 250    | LT ES 61     | <b>59.06</b> | 10       |
| 400    | LT ES 61/400 | <b>54.43</b> | 10       |

Max. length in the LIPROTEC system: 24 m,  
connection length: 3 m

### Technical specifications for LED strips

#### LT ES 5 1

|                             |            |
|-----------------------------|------------|
| Dimensions (B x H)          | 8 x 2.5 mm |
| Rated output (W/m)          | 7.5        |
| Number of LED (u./m)        | 140        |
| Colour temperature (Kelvin) | 3200 K     |
| CRI                         | 92         |


Can be shortened every 50 mm


#### LT ES 6 1

|                             |            |
|-----------------------------|------------|
| Dimensions (B x H)          | 8 x 2.5 mm |
| Rated output (W/m)          | 7.5        |
| Number of LED (u./m)        | 140        |
| Colour temperature (Kelvin) | 4900 K     |
| CRI                         | 92         |

Can be shortened every 50 mm



### Application areas

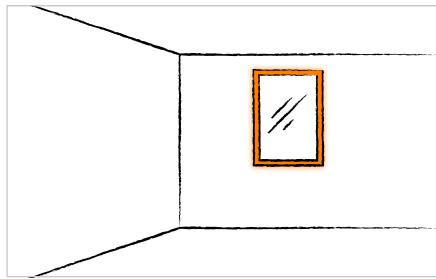

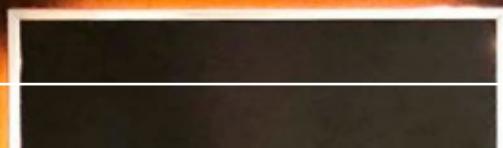

## Wall panel sets (WSK)

The wall panel sets with RGB+W light makes it easy to make a big impression. Simply select between the wide (128.5 cm) and narrow (70 cm) wall panels and order the practical profile set with it. Our RGB+W technology provides you with unlimited design freedom: more than 16 million hues turn your rooms into colour-flooded leisure zones. White hues from 2500 K – 6500 K let your wall panels radiate the same light as your existing ceiling light. If desired, it can be controlled with a Bluetooth receiver. The matching Schlüter-Systems app can be downloaded for free from Google Play (Android™) or the Apple App Store (iOS).

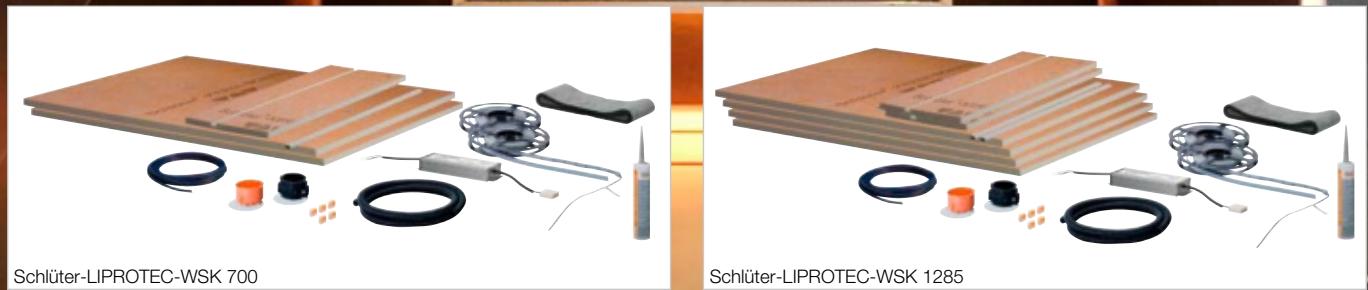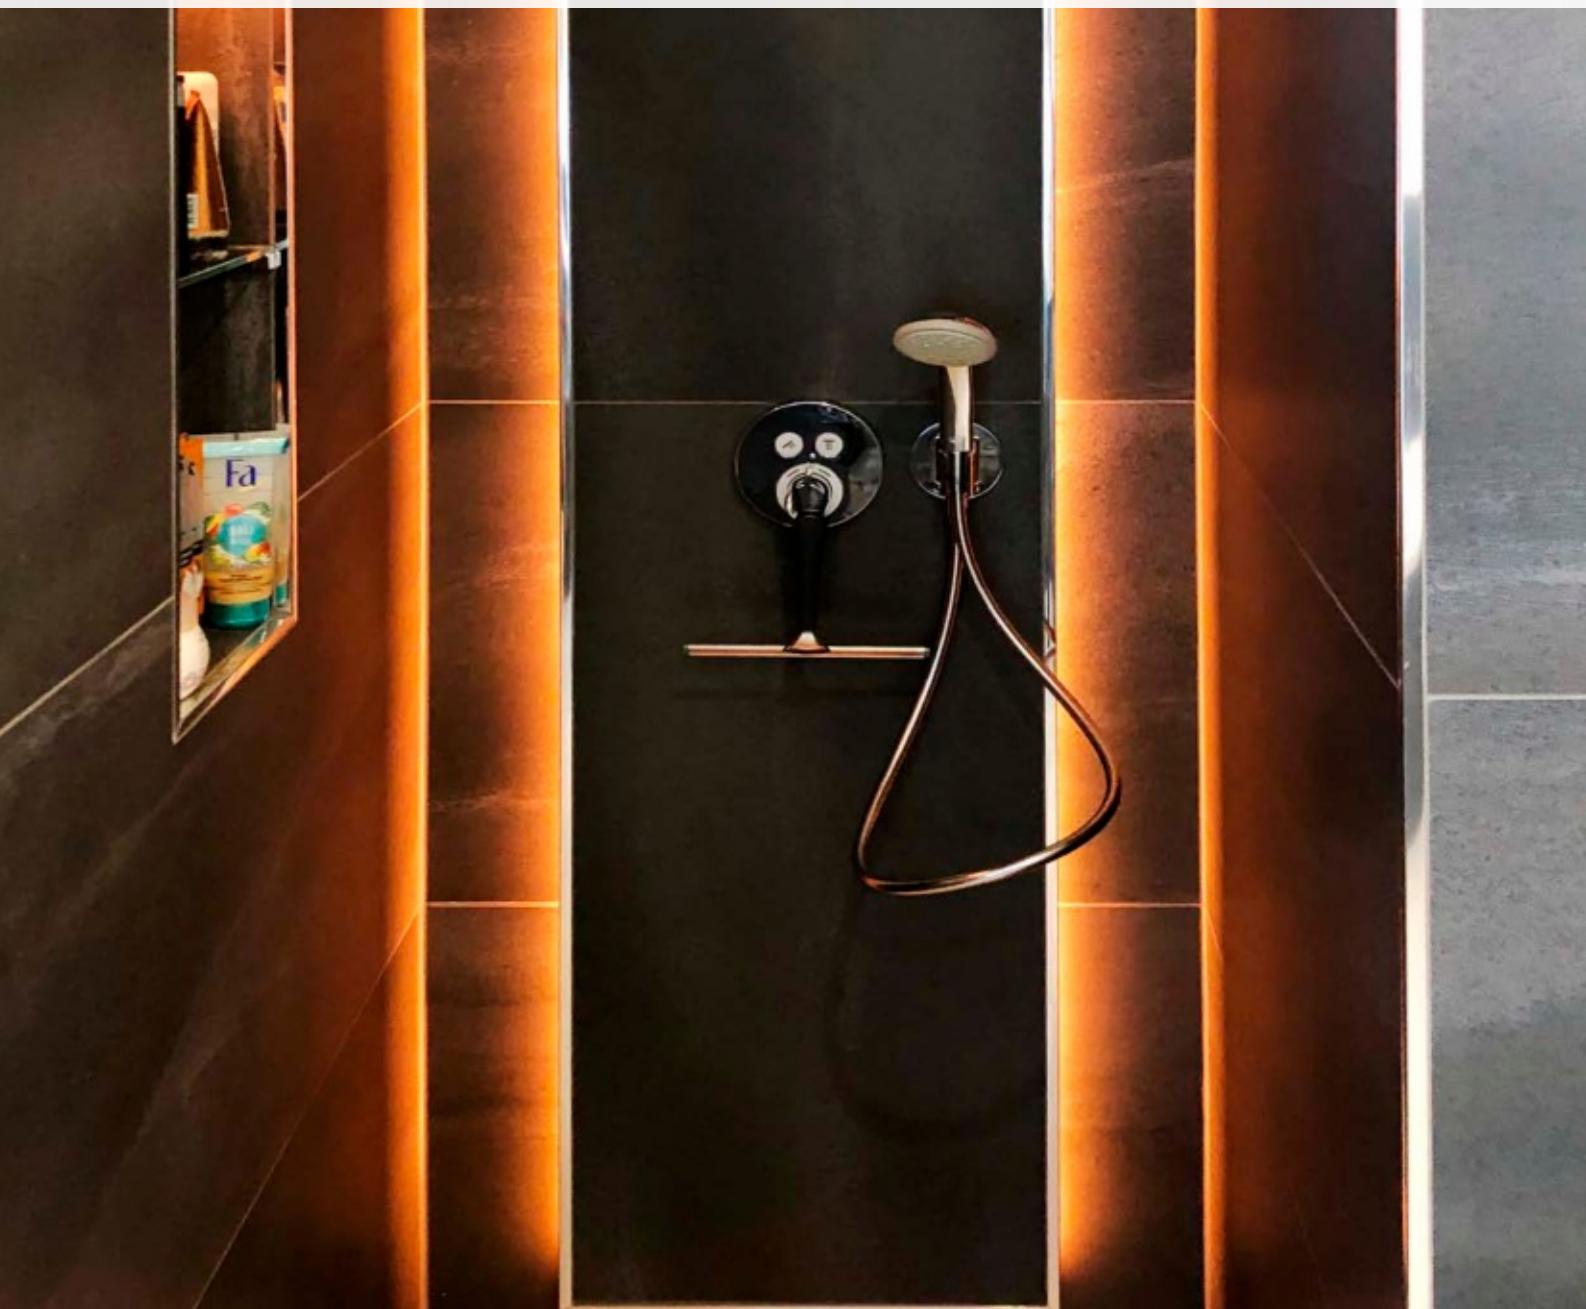

Schlüter-LIPROTEC-WSK 700

Schlüter-LIPROTEC-WSK 1285

## RGB+W CONTROLLABLE

## Profile set



## Schlüter®-LIPROTEC-WSK 2500

profile set for backlit wall panel

| L (m) | Art. No.       | £ / Set | P (Set) |
|-------|----------------|---------|---------|
| 2.5   | WS 20 K1 S2 AE | 285.91  | 10      |



## Accessory set

## Schlüter®-LIPROTEC-WSK 700

accessory set with LED strips, RGB+W


| Art. No.         | £ / Set | P (Set) |
|------------------|---------|---------|
| WS 20 ZS2 LT ES9 | 865.50  | 10      |

## Schlüter®-LIPROTEC-WSK 1285

accessory set with LED strips, RGB+W

| Art. No.         | £ / Set | P (Set) |
|------------------|---------|---------|
| WS 20 ZS3 LT ES9 | 984.87  | 10      |

## Contents

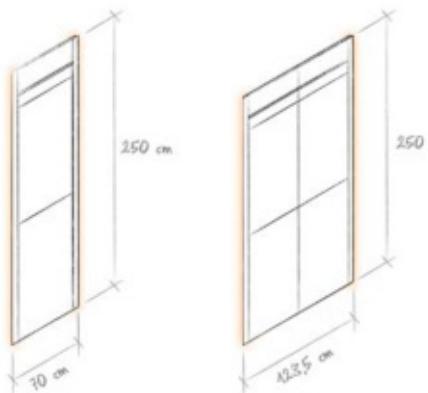

## WSK 2500



- 2 x Schlüter-LIPROTEC-WSK profiles, length: 250 cm, with cutout for cable routing and integrated covered cable duct, incl. Schlüter-LIPROTEC-WSI diffuser lens

## WSK 700

- 2 x Schlüter-LIPROTEC-ES LED strips, length: 250 cm, multi-colour + white light (RGB+W)
- 1 x set Schlüter-KERDI-BOARD, 19 mm, for end format: 250 cm x 70 cm, pre-assembled, with mounting slot for cable duct
- 1 x cable ducts with cover
- 1 x adhesive fleece
- Schlüter-DESIGNBASE-HVL, width: 7.5 cm, length: 800 cm
- 1 x Schlüter-KERDI-FIX, 290 ml grey
- 1 x power supply unit, 24 V, 100 W, input voltage 230 V, AC
- 1 x Schlüter-LIPROTEC-ZS 5A (connection set)
- 1 x empty strip, 200 cm, 20 mm diameter
- 1 x installation/mounting instruction

## WSK 1285

- 2 x Schlüter-LIPROTEC-ES LED strips, length: 250 cm, multi-colour + white light (RGB+W)
- 1 x set Schlüter-KERDI-BOARD, 19 mm, for end format: 250 cm x 128.5 cm, pre-assembled, with mounting slot for cable duct
- 2 x cable ducts with cover
- 1 x adhesive fleece
- Schlüter-DESIGNBASE-HVL, width: 7.5 cm, length: 800 cm
- 1 x Schlüter-KERDI-FIX, 290 ml grey
- 1 x power supply unit, 24 V, 100 W, input voltage 230 V, AC
- 1 x Schlüter-LIPROTEC-ZS 5A (connection set)
- 1 x empty strip, 200 cm, 20 mm diameter
- 1 x installation/mounting instruction

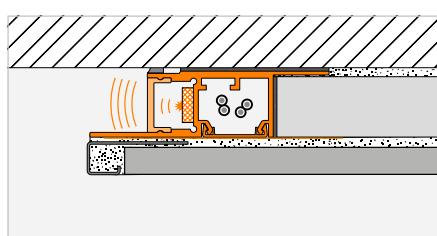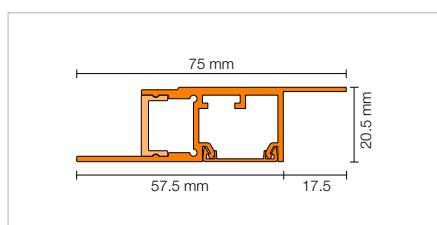

In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting.



## Staircase sets (PB)



Schlüter-LIPROTEC-PB staircase sets put light where it is needed: in the middle of the stair step. The PB 15 sets for 15 steps have 60 cm wide LED modules pre-mounted in the middle. With their diffuser lenses, they provide indirect illumination with a discreet line of light. The combinations of aluminium carrier profile and diffuser lens are 100/150 cm long and can be shortened individually as required. The LED modules have a 4500 K neutral white colour temperature and are cabled by means of a simple coupling system; a 500 cm connection cable and power supply are included in the set.

If that isn't enough, the stair set can easily be expanded to 18 steps with only one supply line. With this in mind, use the Schlüter-LIPROTEC-PB 1 single-step sets.




Schlüter-LIPROTEC-PB 15



Schlüter-LIPROTEC-PB 1

## Advantages

- ✓ Pre-assembled ready for installation
- ✓ Cabling and power supply unit in a complete set
- ✓ Easy installation of the sets in tile adhesive

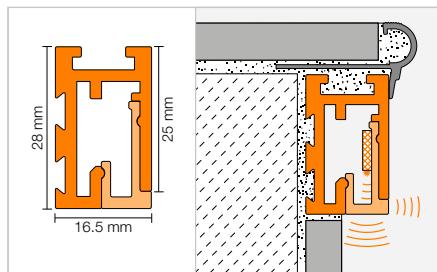

**Note:** Use only with indoor applications! The set is designed for straight staircases. The appropriate stair profiles for the respective cover material has to be ordered separately.

## NEUTRAL WHITE

### Set



### Schlüter®-LIPROTEC-PB 15

set for staircases, anodised aluminium

| Art. No.        | £ / Set        | P (Set) |
|-----------------|----------------|---------|
| PB 15 S1 AE/100 | <b>2191.66</b> | 10      |
| PB 15 S1 AE/150 | <b>2382.23</b> | 10      |

### Schlüter®-LIPROTEC-PB 1

set for one step, anodised aluminium

| Art. No.     | £ / Set       | P (Set) |
|--------------|---------------|---------|
| PB S1 AE/100 | <b>172.16</b> | 10      |
| PB S1 AE/150 | <b>184.85</b> | 10      |

### Schlüter®-LIPROTEC-PB 15

set for staircases, brushed stainless steel effect anodised aluminium

| Art. No.          | £ / Set        | P (Set) |
|-------------------|----------------|---------|
| PB 15 S1 AEEB/100 | <b>2287.42</b> | 10      |
| PB 15 S1 AEEB/150 | <b>2529.84</b> | 10      |

### Schlüter®-LIPROTEC-PB 1

set for one step, brushed stainless steel effect anodised aluminium

| Art. No.       | £ / Set       | P (Set) |
|----------------|---------------|---------|
| PB S1 AEEB/100 | <b>180.25</b> | 10      |
| PB S1 AEEB/150 | <b>193.93</b> | 10      |

## Contents

### PB 15

- 15 x profiles Schlüter-LIPROTEC-PB, 100/150 cm each, incl. locking plate, cable feedthrough, 15 end caps
- 15 x Schlüter-LIPROTEC-PBD diffuser lenses, 100/150 cm each, incl. LED module, neutral white 4500 K, coupling system
- 14 x connection cables, 70 cm each, plug/plug system, 2 x 0.32 mm<sup>2</sup> (AW G22)
- 1 x supply cable 500 cm, single-sided plug system, 2 x 0.32 mm<sup>2</sup> (AW G22)
- 1 x power supply unit, 24 V, 75 W, input voltage 230 V, AC
- 1 x installation/mounting instruction

### PB 1

- 1 x profile Schlüter-LIPROTEC-PB, 100/150 cm, incl. locking plate, cable feedthrough, end cap
- 1 x Schlüter-LIPROTEC-PBD diffuser lens, 100/150 cm, incl. LED module, neutral white 4500 K, coupling system
- 1 x connection cable 70 cm, plug/plug system, 2 x 0.32 mm<sup>2</sup> (AW G22)
- 1 x installation/mounting instruction

**i**  
In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting.

## Supply cable

### Schlüter®-LIPROTEC-ZZK



Schlüter-LIPROTEC-ZZK is a supply cable (2 x 0.32 mm<sup>2</sup>, AWG 22) with a length of 500 cm for connecting the Schlüter-LIPROTEC-PB staircase systems to the voltage supply.

### Schlüter®-LIPROTEC-ZZK

supply cable

| Art. No.     | £ / U.       | P (Unit) |
|--------------|--------------|----------|
| LT ZZK 2A 5M | <b>12.66</b> | 10       |



## Decorative frame sets (D)





Schlüter-LIPROTEC-D 90 are sets for creating illuminated decorative frames. With these sets, mirrors or design elements such as printed glass or decor panels can be elegantly framed with indirect LED lighting. The support profiles are already mitre-cut. Four matching Schlüter-LIPROTEC-ES-LED strips with a colour temperature of 3200 K (warm white) or 4900 K (neutral white) are included in the set, as well as the power supply unit and all material for assembly and wiring.



## Advantages

- ✓ Pre-assembled ready for installation
- ✓ Complete cabling in the set
- ✓ Set includes suitable power supply unit
- ✓ Easy installation of the sets in tile adhesive

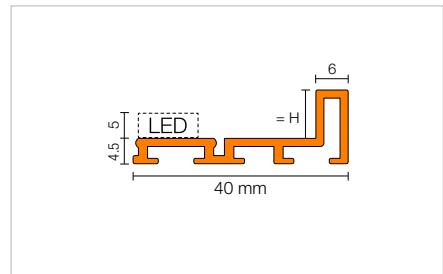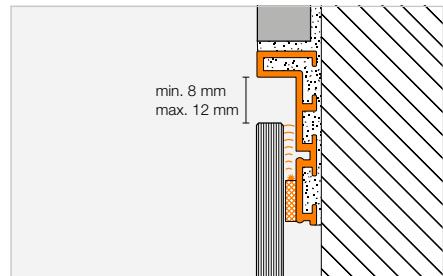

**Note:** For fastening the decorative element (e.g. mirror), the instructions in the manuals have to be followed.

**i**  
In the CONTROL section, you can find the right control system for perfectly completing your Schlüter-LIPROTEC lighting.



WARM WHITE

NEUTRAL WHITE

Set

### Schlüter®-LIPROTEC-D 90 S1

frame set, warm white, 3200 K

| H (mm) | Art. No.      | £ / Set | P (Set) |
|--------|---------------|---------|---------|
| 9      | LT D 90 S1 AE | 734.97  | 10      |

### Schlüter®-LIPROTEC-D 90 S2

frame set, neutral white, 4900 K

| H (mm) | Art. No.      | £ / Set | P (Set) |
|--------|---------------|---------|---------|
| 9      | LT D 90 S2 AE | 734.97  | 10      |

## Contents

### D 90 S1

- 1 x profile frame Schlüter-LIPROTEC-D 90, 118.5 cm x 93.5 cm, incl. mitre cuts and milled edges for decorative material support incl. Schlüter-LIPROTEC-D/V corner connector
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 110 cm, warm white 3200 K
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 85 cm, warm white 3200 K
- 1 x set of decorative material supports, above/below (4 units)
- 1 x set of mirror plates, above/below (4 units)
- 1 x Schlüter-LIPROTEC-ZS connection set
- 1 x empty strip, 200 cm, 20 mm diameter
- 1 x power supply unit, 24 V, 50 W, input voltage 230 V, AC
- 1 x installation/mounting instruction
- 1 x installation tool/mounting aid

### D 90 S2

- 1 x profile frame Schlüter-LIPROTEC-D 90, 118.5 cm x 93.5 cm, incl. mitre cuts and milled edges for decorative material support incl. Schlüter-LIPROTEC-D/V corner connector
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 110 cm, neutral white 4900 K
- 2 x LED strips, Schlüter-LIPROTEC-ES, length: 85 cm, neutral white 4900 K
- 1 x set of decorative material supports, above/below (4 units)
- 1 x set of mirror plates, above/below (4 units)
- 1 x Schlüter-LIPROTEC-ZS connection set
- 1 x empty strip, 200 cm, 20 mm diameter
- 1 x power supply unit, 24 V, 50 W, input voltage 230 V, AC
- 1 x installation/mounting instruction
- 1 x installation tool/mounting aid

**i**

### Decorative element dimensions (e.g. mirror):

115.3 cm x 90.3 cm (10 mm illuminated joint)

**Decorative element weight:** max. 16 kg



# Accessories

The accessories in the LIPROTEC-PRO series can be brought together individually via Wago connectors. The cables can be shortened as required. The coloured sheathing of the cables simplifies installation. You can see how to connect the individual components and which system limitations exist in the PLAN section from page 98.

## Power supply

### Schlüter®-LIPROTEC-EKE

Schlüter-LIPROTEC-EKE power supply units convert the mains voltage to the 24 V required by the LED strips. They are easy to install and available in different wattages from 30 to 200 W. They are equipped with a connection cable with Euro plug for the Schlüter-LIPROTEC-PRO system.



**Length of supply line:** 1.8 m

**Ambient temperature:** -20 °C to +50 °C

**Input voltage:** 230 V, AC

### Schlüter®-LIPROTEC-EKE

power supply unit 24 V, DC

| Watt | Max. Watt* | Art. No.        | £ / U.        | P (Unit) |
|------|------------|-----------------|---------------|----------|
| 30   | 27         | LT EKE 24V 30W  | <b>64.87</b>  | 10       |
| 50   | 45         | LT EKE 24V 50W  | <b>84.55</b>  | 10       |
| 75   | 67.5       | LT EKE 24V 75W  | <b>113.50</b> | 10       |
| 100  | 90         | LT EKE 24V 100W | <b>165.64</b> | 10       |
| 150  | 135        | LT EKE 24V 150W | <b>187.65</b> | 10       |
| 200  | 180        | LT EKE 24V 200W | <b>217.76</b> | 10       |

\* A safety reserve has to be taken into account when selecting the power supply unit (see maximum load of the corresponding power supply unit).

|                | LT EKE 24V 30W | LT EKE 24V 50W | LT EKE 24V 75W | LT EKE 24V 100W | LT EKE 24V 150W | LT EKE 24V 200W |
|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|
| B x H x T (mm) | 156 x 50 x 17  | 160 x 58 x 18  | 160 x 58 x 18  | 164 x 57 x 17   | 177 x 57 x 18   | 195 x 67 x 31   |

## Low-voltage cable

### Schlüter®-LIPROTEC-ZK

Schlüter-LIPROTEC-ZK are colour-coded low-voltage cables for connecting Schlüter-LIPROTEC LED strips to a suitable power supply unit and/or receiver.



2-core



5-core

### Schlüter®-LIPROTEC-ZK

low-voltage cable 2 x 1.31 mm<sup>2</sup> (AWG 16)

| L (m) | Art. No.        | £ / U.       | P (Unit) |
|-------|-----------------|--------------|----------|
| 25    | LT ZK 2A 10 25M | <b>64.17</b> | 10       |

Cable for LED strips LT ES 11 – LT ES 61 and for connecting power supply and receiver

### Schlüter®-LIPROTEC-ZK

low-voltage cable 5 x 1.31 mm<sup>2</sup> (AWG 16)

| L (m) | Art. No.        | £ / U.        | P (Unit) |
|-------|-----------------|---------------|----------|
| 25    | LT ZK 5A 10 25M | <b>141.26</b> | 10       |

Cable for LED strips LT ES 9

## Low-voltage cable set | Wago connector

## Schlüter®-LIPROTEC-ZS

Schlüter-LIPROTEC-ZS are connecting sets for connecting Schlüter-LIPROTEC installations to a suitable power supply unit and/or receiver.



2-core



5-core

## Schlüter®-LIPROTEC-ZKL



## Schlüter®-LIPROTEC-ZKL

Wago connectors

| Cores | Package (Units) | Art. No.    | £ / Package | P (Package) |
|-------|-----------------|-------------|-------------|-------------|
| 3     | 50              | LT ZKL 1 3A | 46.96       | 10          |
| 5     | 25              | LT ZKL 1 5A | 38.27       | 10          |

## Schlüter®-LIPROTEC-ZS

connection set, 2-core

| Art. No. | £ / Set | P (Set) |
|----------|---------|---------|
| LT ZS 2A | 40.99   | 10      |

Connection set for LED strip LT ES 11 – LT ES 61, and for power supply unit and receiver connection

## Contents

- 1 x cable 800 cm, 2 x 1.31 mm<sup>2</sup> (AWG 16)
- 1 x hollow wall junction box with lid
- 1 x concealed junction box with lid
- 2 x Wago connectors, 32 A, 5-core

## Schlüter®-LIPROTEC-ZS

connection set, 5-core

| Art. No. | £ / Set | P (Set) |
|----------|---------|---------|
| LT ZS 5A | 65.11   | 10      |

Connection set for LED strip LT ES 9

## Contents

- 1 x cable 800 cm, 5 x 1.31 mm<sup>2</sup> (AWG 16)
- 1 x hollow wall junction box with lid
- 1 x concealed junction box with lid
- 5 x Wago connectors, 32 A, 3-core

## Conduit | cable duct

## Schlüter®-LIPROTEC-ZLR



## Schlüter®-LIPROTEC-ZLR

conduit, 20 mm diameter

| L (m) | Art. No.      | £ / U. | P (Unit) |
|-------|---------------|--------|----------|
| 50    | LT ZLR 20 50M | 96.33  | 10       |

## Schlüter®-LIPROTEC-ZKK

cable duct, white

| L (m) | Art. No.    | £ / U. | P (Unit) |
|-------|-------------|--------|----------|
| 2.5   | LT ZKK 2010 | 4.51   | 10       |



## Junction box

### Schlüter®-LIPROTEC-Z

#### Schlüter®-LIPROTEC-Z

hollow wall junction box with lid, set = 5 units

| H (mm) | Ø mm | Art. No.    | £ / Set      | P (Set) |
|--------|------|-------------|--------------|---------|
| 47     | 68   | LT Z 5HD 47 | <b>17.99</b> | 10      |



#### Schlüter®-LIPROTEC-Z

hollow wall junction box with lid, set = 5 units

| H (mm) | Ø mm | Art. No.     | £ / Set      | P (Set) |
|--------|------|--------------|--------------|---------|
| 47     | 68   | LT Z 5HDD 47 | <b>84.13</b> | 10      |

#### Schlüter®-LIPROTEC-Z

concealed junction box with lid, set = 5 units

| H (mm) | Ø mm | Art. No.    | £ / Set      | P (Set) |
|--------|------|-------------|--------------|---------|
| 46     | 65   | LT Z 5UD 46 | <b>13.50</b> | 10      |

#### Schlüter®-LIPROTEC-Z


concealed junction box with cover, set = 5 units

| L x B x H (mm) | Art. No.    | £ / Set      | P (Set) |
|----------------|-------------|--------------|---------|
| 87 x 87 x 60   | LT Z 5UK 60 | <b>48.15</b> | 10      |

## Assembly module for cable duct

### Schlüter®-KERDI-BOARD-K

Schlüter-KERDI-BOARD-K are installation modules with pre-milled grooves for accommodating Schlüter-LIPROTEC cable ducts. The groove is designed to also accommodate a 19 mm Schlüter-KERDI-BOARD or the Schlüter-LIPROTEC-LL carrier profile. (Product data sheet 12.1)

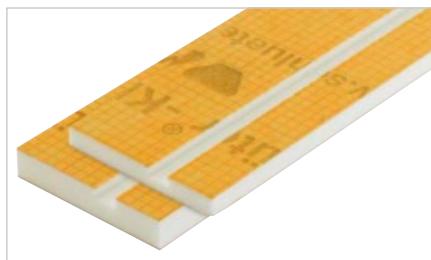

#### Schlüter®-KERDI-BOARD-K

installation module with cable groove, 15 x 250 cm

| H (mm) | Art. No.          | £ / U.       | PL (Unit) |
|--------|-------------------|--------------|-----------|
| 19     | KB 19 150 2500 K1 | <b>20.98</b> | 10        |
| 28     | KB 28 150 2500 K1 | <b>24.93</b> | 10        |


## Bonding fleece | reflector tape

### Schlüter®-DESIGNBASE-HVL

#### Schlüter®-DESIGNBASE-HVL

self-adhesive bonding fleece

| B (mm) | L = 20 m<br>Art. No. | £ / U.       | P (Unit) |
|--------|----------------------|--------------|----------|
| 38     | HVL 38 / 20M         | <b>33.34</b> | 10       |
| 75     | HVL 75 / 20M         | <b>67.15</b> | 10       |

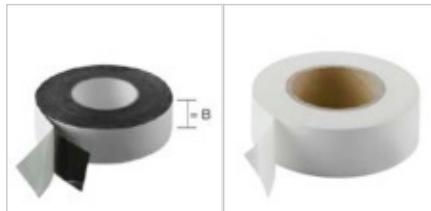

### Schlüter®-LIPROTEC-RKB

#### Schlüter®-LIPROTEC-RKB

self-adhesive reflector tape

| B (mm) | L = 50 m<br>Art. No. | £ / U.      | P (Unit) |
|--------|----------------------|-------------|----------|
| 38     | LT Z RKB 38 50M      | <b>6.44</b> | 10       |

## Tool

### Schlüter®-PROCUT-PSF

Schlüter-PROCUT-PSF is a special cutting tool for precisely cutting LED strips to size. To ensure that the LED strip retains IP-compliant tightness when it is shortened, it has to be cut at a 45° angle and sealed with the end caps and sealing adhesive included in the set.



#### Schlüter®-PROCUT-PSF

profile cutter for profiles with joint spacer

| Art. No. | £ / U.       | P (Unit) |
|----------|--------------|----------|
| PSF      | <b>72.01</b> | 10       |



EASY

PRO


CONTROL

PLAN



# CONTROL

Schlüter-LIPROTEC-CONTROL technology offers all the possibilities of modern lighting control with the LIPROTEC-CLASSIC and LIPROTEC-ZONES variants. The tried-and-tested CLASSIC system is a simple but convenient solution for controlling a LIPROTEC light source with a mobile device, a remote control or now also with a wireless rotary control. If you want to control several lighting areas with one control element, the new LIPROTEC-ZONES control system offers a wide range of options, including time dependent programming. Both systems work with the proven Bluetooth technology. CLASSIC or ZONES – the choice is yours, to suit your requirements for contemporary accent lighting.

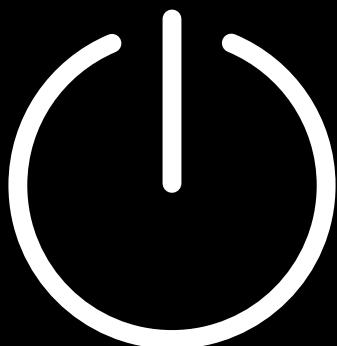



EASY PRO

Page Page

## CLASSIC CONTROL

LIPROTEC-PEBR | receiver

SET 73

LIPROTEC-EBR | receiver

SET 73

LIPROTEC-ERP | rotary control

73 73

## ZONES CONTROL

LIPROTEC-PEBZS | starter-set receiver

SET 76

LIPROTEC-EBZS | starter-set receiver

SET 76

LIPROTEC-PEBZR | receiver

77

LIPROTEC-EBZR | receiver

77

LIPROTEC-ERPZ | rotary control

77 77

## KEY

Explanations of properties / Areas of application

107



PRO

CONTROL

EASY

PLAN



For technical information and properties, refer to the PLAN section starting on page 96.



FIND OUT MORE AT:


LIPROTEC.CO.UK



## Schlüter®-LIPROTEC-CLASSIC

The classic for controlling simple LED installations with Schlüter-LIPROTEC. You cannot control a light source more simply. The LIPROTEC-CLASSIC control system enables convenient control of uniform light sources throughout the room, either coloured or white. Optionally, the installation can take place in the PRO or EASY system, this is entirely at the discretion of the user. As a user, you have the choice of whether you want to control it via the remote control, the Schlüter-LED-Colour-Control app or optionally with the new, stylish wireless rotary control. The control sets can be extended by additional receivers at any time as required.

- For simple control of uniform light sources
- White LEDs or RGB+W can be controlled
- Control via app, remote control or rotary control
- Receiver and remote control in one set

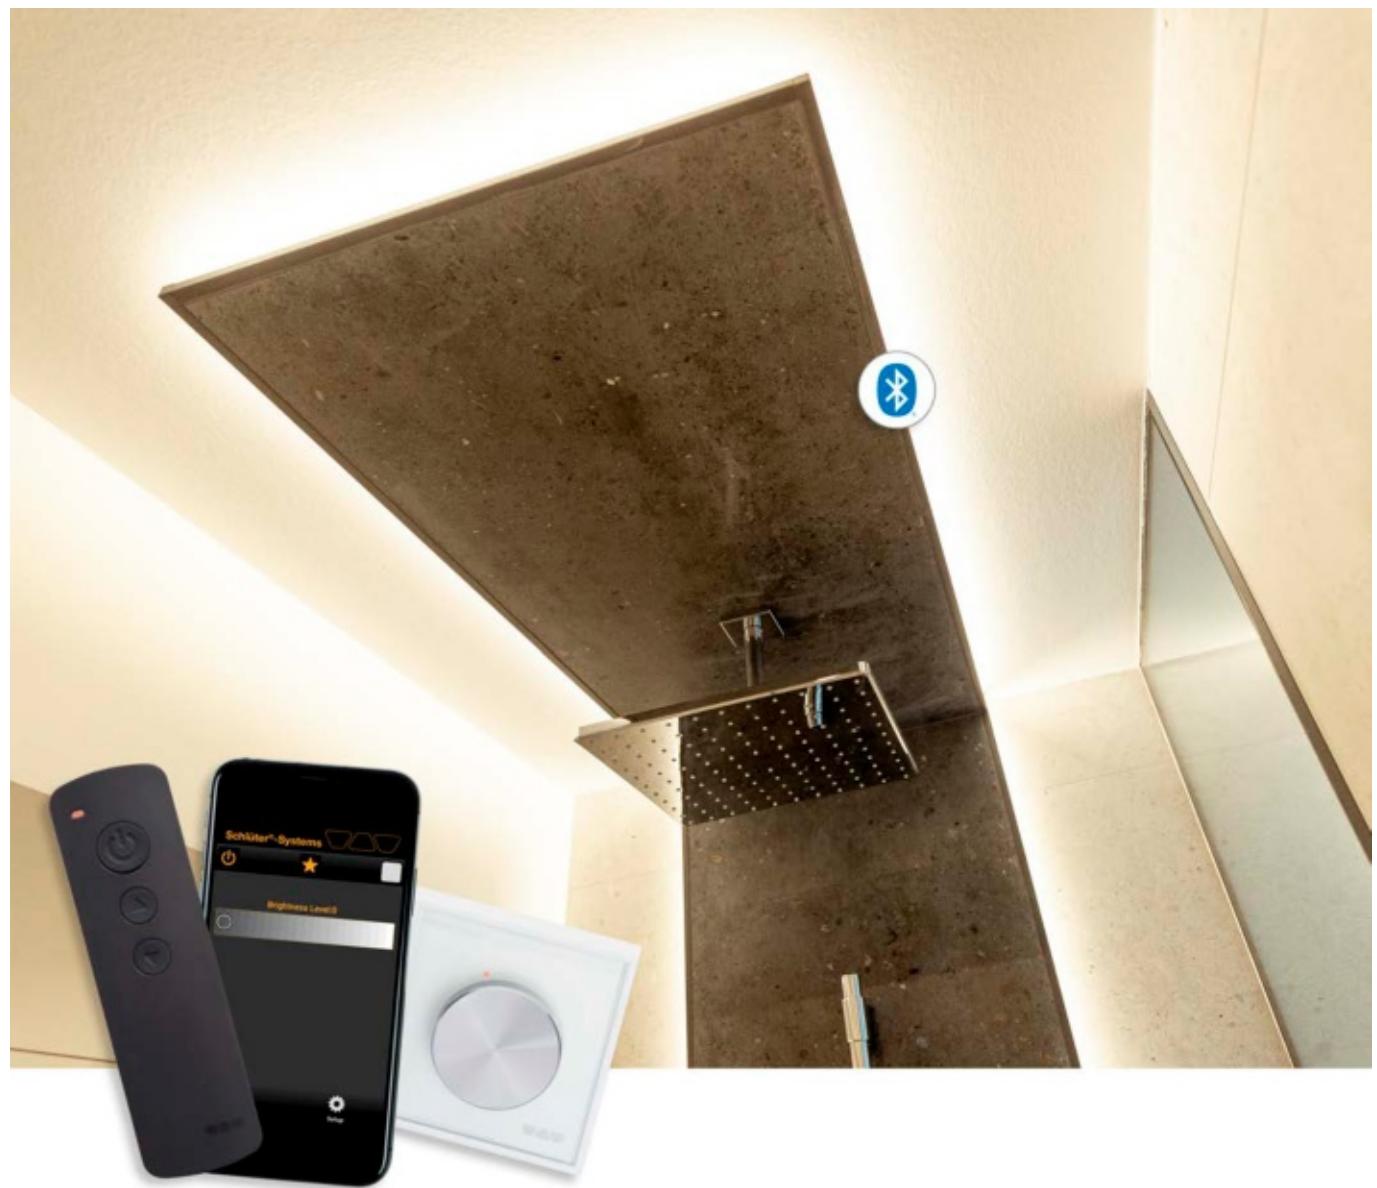

# Schlüter®-LIPROTEC-ZONES

The new Schlüter-LIPROTEC-ZONES control sets standards with innovative Bluetooth Mesh technology. Even more complex installations of LED systems from the Schlüter-LIPROTEC-EASY and -PRO series can be conveniently controlled with LIPROTEC-ZONES. The LED elements can be controlled individually or combined into zones that are addressed together. With the Bluetooth Mesh technology, various light sources can be dependably operated, including across extended LED assemblies with LIPROTEC-ZONES. The practical starter sets can be extended by additional receivers at any time as required. You can control the system either with the remote control included in the starter set, with an app installed in a mobile device or with a rotary control that is available as an accessory.

- Bluetooth Mesh technology
- Control light separately in zones
- White LEDs or RGB+W or combined can be controlled
- Control via app, remote control or rotary control
- Starter sets



Schlüter®-LIPROTEC-ZONES



## Control via app

Convenient and intuitive: LIPROTEC-CLASSIC and LIPROTEC-ZONES each offer the option of control with an app for smartphones or tablets. Both apps are available for Android and iOS devices and can be downloaded and used free of charge.



[schlueter-systems.com/app/](http://schlueter-systems.com/app/)



SET



## CLASSIC control

## Schlüter®-LIPROTEC-PEBR

## Schlüter®-LIPROTEC-EBR

Schlüter-LIPROTEC-PEBR/-EBR are Bluetooth receivers for controlling white or RGB+W LED strips using the included remote control or via Bluetooth on smartphones or tablets. The receiver is operated via Bluetooth by means of the Schlüter-LED-Colour-Control app, which is downloadable for free for both Android and iOS devices.

Up to two mobile devices can be simultaneously connected to the receiver. It is possible to store a preselection of lighting scenarios as favourites in the app. The very compact dimensions of the Bluetooth receiver enable space-saving installation.

The receivers are optionally available as EASY version in plug-and-play design or in the PRO version with open cable ends for connection with Wago connectors.



## Control sets each contain:

- 1 x LIPROTEC-CLASSIC receiver
- 1 x LIPROTEC-CLASSIC remote control with wall mount
- Incl. Wago connectors (PRO only)

## Schlüter®-LIPROTEC-PEBR | Schlüter®-LIPROTEC-EBR

control incl. receiver and remote control

| Version | Type of light | Art. No.  | £ / U.        | P (Unit) |
|---------|---------------|-----------|---------------|----------|
| EASY    | white         | LT PEBR 1 | <b>200.03</b> | 10       |
| EASY    | RGB+W         | LT PEBR 4 | <b>202.71</b> | 10       |
| PRO     | white         | LT EBR 1  | <b>178.13</b> | 10       |
| PRO     | RGB+W         | LT EBR 4  | <b>184.26</b> | 10       |

## Technical specifications for CLASSIC control

|  | LT PEBR 1 | LT PEBR 4 | LT EBR 1            | LT EBR 4 |
|--|-----------|-----------|---------------------|----------|
| Use with LED modules                   | white     | RGB+W     | –                   | –        |
| Use with LED strips                    | –         | –         | LT ES 11 – LT ES 61 | LT ES 9  |
| Max. total load in the LIPROTEC system | 90 W      | 90 W      | 180 W               | 180 W    |
| Max. length LED strips                 | 18 m      | 6 m       | 24 m                | 12 m     |

## Note:

For additional technical information and properties, refer to the PLAN section.

## CLASSIC rotary control



## Schlüter®-LIPROTEC-ERP

Schlüter-LIPROTEC-ERP is a wireless rotary control for operating Schlüter-LIPROTEC-PEBR/-EBR Bluetooth receivers. The rotary control units include on / off / dim functions and support the use of memorised favourite light settings with the app. The units can operate both white and coloured LED strips. The genuine glass carrier plate with brilliant white rear lacquering can be combined with many commercially available frame 55 series, using the supplied adapter. If you prefer the stand-alone variant, you can also individually attach the LIPROTEC rotary control in your preferred location with our standard frame.



## Schlüter®-LIPROTEC-ERP

wireless rotary control  
for Bluetooth receiver EBR / PEBR

| Art. No.  | £ / U.       | P (Unit) |
|-----------|--------------|----------|
| LT ERP BW | <b>96.83</b> | 10       |

## Note:

For additional technical information and properties, refer to the PLAN section.



# Schlüter®-LIPROTEC-ZONES

## Creating worlds of light at home

Schlüter-LIPROTEC-ZONES is a control tool for the LED systems Schlüter-LIPROTEC-EASY and -PRO. The starter sets can be used to individually control light sources and combine them into zones. With the Bluetooth Mesh Technology, various light sources can be operated. LIPROTEC-ZONES offers 3 individual and convenient control options for your light solutions:

- Remote control supplied as a starter set
- App in a mobile device
- Rotary control available as an accessory



Decide for yourself which option is most convenient for you. The app is available free of charge for both Android and iOS devices. The simple menu lets you arrange individual light colours and colour sequences. You can also save your favourite white and coloured hues in the app.

Plug-and-play doesn't get any better than LIPROTEC-EASY: The starter sets contain pre-assembled components. More experienced users can also use the LIPROTEC-ZONES control as a PRO variant.

## Rotary control with a “twist”

Our rotary control units are truly “easy” and require no wiring connection. They can be combined with many standard frames from the 55 series. All rotary controls are shipped with a corresponding adapter module. If you prefer the stand-alone variant, you can also individually attach the LIPROTEC rotary control in your preferred location with our standard frame.



Schlüter®-LIPROTEC-ZONES

# Lighting control

## with Schlüter®-LIPROTEC-ZONES

The various starter sets support the following lighting options:

### Starter set

Light colour white



**EASY:** LT PEB ZS 1  
**PRO:** LT EB ZS 1

**Max. LED lengths in the starter set:**  
2 x 18 m (EASY) / 2 x 24 m (PRO)

### Starter set

Light colour RGB+W



**EASY:** LT PEB ZS 4  
**PRO:** LT EB ZS 4


**Max. LED lengths in the starter set:**  
2 x 6 m (EASY) / 2 x 12 m (PRO)

### Note:

The RGB+W technology can also generate specific white hues ranging from warm white to neutral white.

### Starter set

Light colour white + RGB+W

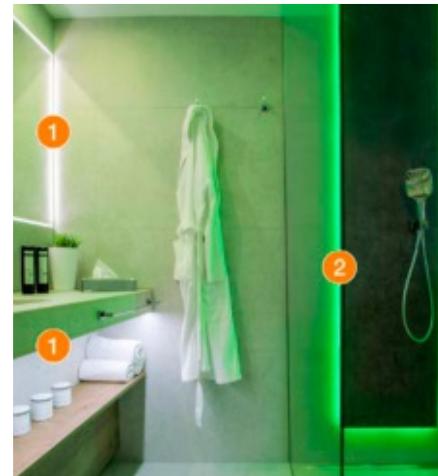

**EASY:** LT PEB ZS 1/4  
**PRO:** LT EB ZS 1/4

**Max. LED lengths (white) in the starter set:**  
18 m (EASY) / 24 m (PRO)


**Max. LED lengths (RGB+W) in the starter set:**  
6 m (EASY) / 12 m (PRO)



### Starter set

**Starter sets each contain:**

2 x LIPROTEC-ZONES Bluetooth Mesh receivers  
1 x LIPROTEC-ZONES remote control with wall mount

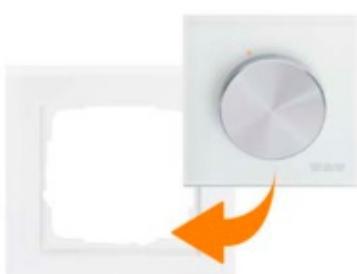

The rotary controls can be combined with many commercially available series 55 frames.

### Rotary control

Available as an optional accessory





## ZONEs starter set



### Schlüter®-LIPROTEC-PEBZS

### Schlüter®-LIPROTEC-EBZS

Schlüter-LIPROTEC-PEBZS/-EBZS are starter sets for conveniently controlling light sources in a LIPROTEC-ZONEs system. The sets allow for individual control or combining lights into zones. With the Bluetooth Mesh technology, various light sources can be independently operated, including across extended LED assemblies. You can control the system either with the remote control included in the starter set, with an app installed in a mobile device or with a rotary control that is available as an accessory. The app is available free of charge for both Android and iOS devices. The simple menu lets you arrange individual light colours and colour sequences. You can also save your favourite white and coloured hues in the app. In addition, you can specify time controlled light settings with the app. For example, you can generate automatic light scenarios for a recurring daily sequence.



### Schlüter®-LIPROTEC-PEBZS | Schlüter®-LIPROTEC-EBZS

ZONEs starter set Bluetooth Mesh receiver incl. remote control and 2 receivers

| Version | Type of light | Art. No.      | £ / U.        | P (Unit) |
|---------|---------------|---------------|---------------|----------|
| EASY    | white         | LT PEB ZS 1   | <b>331.26</b> | 10       |
| EASY    | RGB+W         | LT PEB ZS 4   | <b>341.45</b> | 10       |
| EASY    | white + RGB+W | LT PEB ZS 1/4 | <b>336.34</b> | 10       |
| PRO     | white         | LT EB ZS 1    | <b>310.87</b> | 10       |
| PRO     | RGB+W         | LT EB ZS 4    | <b>321.06</b> | 10       |
| PRO     | white + RGB+W | LT EB ZS 1/4  | <b>315.97</b> | 10       |

#### Starter sets each contain:

- 2 x LIPROTEC-ZONEs Bluetooth Mesh receivers
- 1 x LIPROTEC-ZONEs remote control with wall mount
- Incl. Wago connectors (PRO only)

## Technical specifications for ZONEs starter sets

|  | LT PEB ZS 1 | LT PEB ZS 4 | LT PEB ZS 1/4              | LT EB ZS 1 | LT EB ZS 4 | LT EB ZS 1/4                |
|--|-------------|-------------|----------------------------|------------|------------|-----------------------------|
| Max. total load in the LIPROTEC system | 2 x 90 W    | 2 x 90 W    | 2 x 90 W                   | 2 x 180 W  | 2 x 180 W  | 2 x 180 W                   |
| Max. length LED strips                 | 2 x 18 m    | 2 x 6 m     | white: 18 m.<br>RGB+W: 6 m | 2 x 24 m   | 2 x 12 m   | white: 24 m.<br>RGB+W: 12 m |

#### Note:

For additional technical information and properties, refer to the PLAN section.



You can expand your installation with additional LIPROTEC-ZONEs Bluetooth Mesh receivers.



## ZONES receiver



### Schlüter®-LIPROTEC-PEBZR

### Schlüter®-LIPROTEC-EBZR

Schlüter-LIPROTEC-PEBZR/-EBZR are Bluetooth Mesh receivers for controlling multiple LIPROTEC LED strips via the ZONES remote control, suitable Bluetooth enabled mobile devices or with a ZONES rotary control. The receivers expand light installations with Schlüter-LIPROTEC-ZONES starter sets. The receivers are operated via Bluetooth by means of the Schlüter-LED-ZONES-CONTROL app, which is available free of charge for both Android and iOS devices. The compact dimensions of the receiver enable space-saving installation.



### Schlüter®-LIPROTEC-PEBZR | Schlüter®-LIPROTEC-EBZR

ZONES Bluetooth Mesh receiver

| Version | Type of light | Art. No.    | £ / U.        | P (Unit) |
|---------|---------------|-------------|---------------|----------|
| EASY    | white         | LT PEB ZR 1 | <b>163.08</b> | 10       |
| EASY    | RGB+W         | LT PEB ZR 4 | <b>168.18</b> | 10       |
| PRO     | white         | LT EB ZR 1  | <b>152.89</b> | 10       |
| PRO     | RGB+W         | LT EB ZR 4  | <b>157.98</b> | 10       |

**Note:** Incl. Wago connectors (PRO only)

## Technical specifications for ZONES receivers

|  | LT PEB ZR 1 | LT PEB ZR 4 | LT EB ZR 1 | LT EB ZR 4 |
|--|-------------|-------------|------------|------------|
| Max. total load in the LIPROTEC system | 90 W        | 90 W        | 180 W      | 180 W      |
| Max. length LED strips                 | 18 m        | 6 m         | 24 m       | 12 m       |

**Note:**

For additional technical information and properties, refer to the PLAN section.

**i**  
The Bluetooth Mesh receivers can be freely combined with the ZONES starter sets.

## ZONES rotary control



### Schlüter®-LIPROTEC-ERPZ

Schlüter-LIPROTEC-ERPZ are Bluetooth Mesh rotary controls for operating the LIPROTEC-ZONES illuminated profile technology. The control units include on / off / dim functions. The units can operate both white and coloured LED strips. When controlling RGB+W settings, the white light colour temperature can be seamlessly adjusted from warm white (2700 K) to cold white (6500 K). The genuine glass carrier plate with brilliant white rear lacquering can be combined with many commercially available standard frame series, using the supplied adapter. If you prefer the stand-alone variant, you can also individually attach the LIPROTEC rotary control in your preferred location with our standard frame.



### Schlüter®-LIPROTEC-ERPZ

ZONES rotary control for Bluetooth Mesh applications

| Art. No.   | £ / U.        | P (Unit) |
|------------|---------------|----------|
| LT ERPZ BW | <b>107.02</b> | 10       |


**Note:**

For additional technical information and properties, refer to the PLAN section.



# PLAN

Good planning is the prerequisite for a project's success. The PLAN section contains all the information needed to plan your LIPROTEC projects and ensure their success – from detailed dimensions of the profile to the photometric data of our LED light strips.

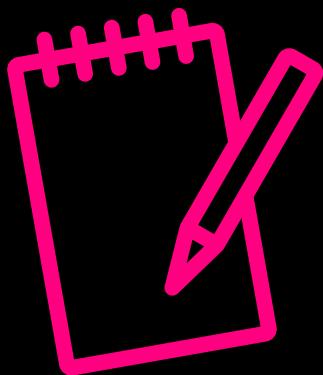



## LED NICHE SETS

NLT / NLT-BR – Niche with LED lighting, coloured + white

Page

80

## LED MODULES

LLP – LED module, coloured | linear light

80

LLPM – LED module, coloured + white | linear light with anchoring leg

82

LLPE – LED module, coloured | linear light | wall corner

82

## LED NICHE SETS AND LED MODULES

LIPROTEC wiring diagrams

98

## LED PROFILES

LL – Linear light, coloured + white

84

LLE – Linear light, coloured + white | Corner

84

WS – Wall panel lighting, coloured + white

86

WSK – Wall panel lighting with cable duct, coloured + white

86/92

WSQ – Wall panel lighting with QUADEC finishing profile, coloured + white

88

PB – Stair edge lighting, white

88/94

DESIGNBASE-QD – Landing/border profile, white

90

VB – Cove lighting, white

90

D – Carrier profile for mirror, white

92/94

## CONTROL

CLASSIC control

96

ZONES control

96

CLASSIC/ZONES rotary control

97

## KEY

Explanations of properties / Areas of application

107



FIND OUT MORE AT:

LIPROTEC.CO.UK






## Schlüter®-KERDI-BOARD-NLT/-NLT-BR

Schlüter-KERDI-BOARD-NLT/-NLT-BR are prefabricated niche sets made of KERDI-BOARD with plug-and-play LIPROTEC-LED technology. They are used to create illuminated niches and storage surfaces for all kinds of wall areas. These niches can be integrated into the Schlüter-KERDI waterproofing system as a bonded waterproofing assembly. The niches are available in different dimensions and lighting options. The rectangular niches are available with illumination either on the long or the narrow side. The LED module can either be positioned at the front edge, in the centre or at the rear of the wall that is to be tiled. The niches are available both with or without Bluetooth control. We recommend using a standard light switch for convenience. (Product data sheet 12.2)


| NICHES         | APPLICATION AREA | PROPERTIES  | DIMENSIONS               |                  |               |
|----------------|------------------|---|--------------------------|------------------|---------------|
|                |                  |   | VERSION                  | LED LENGTHS (mm) | LIGHT COLOUR  |
| B x H x T (mm) |                  |      | WARM WHITE/NEUTRAL WHITE | 300              | warm white    |
|                |                  |   |                          |                  | neutral white |
|                |                  |   |                          |                  | RGB+W         |
|                |                  |   |                          |                  | warm white    |
|                |                  |   |                          |                  | neutral white |
|                |                  |   | RGB+W                    | 505              | RGB+W         |
|                |                  |   |                          |                  | warm white    |
|                |                  |   |                          |                  | neutral white |
|                |                  |   |                          |                  | RGB+W         |
|                |                  |   |                          |                  | warm white    |
|                |                  |   | 705                      | 705              | neutral white |
|                |                  |   |                          |                  | RGB+W         |

## Schlüter®-LIPROTEC-LLP

Schlüter-LIPROTEC-LLP are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a U-shaped carrier profile made of aluminium. With the LED modules, coloured RGB+W light strips with more than 16 million different hues and colour temperatures of 2500 K – 6500 K can be created. The carrier profile with an installation height of 17 mm makes flush installation possible. (Product data sheet 15.8)

| PROFILES / TYPE OF LIGHT  | APPLICATION AREA  | PROPERTIES   | DIMENSIONS OF LED MODULE |             |
|---|---|--|--------------------------|-------------|
|   |   |  | WIDTH / HEIGHT (mm)      | LENGTH (cm) |
| RGB+W   | ALUMINIUM   |  |                          |             |
|  |     |  | 17 mm                    | 50          |
|   |   |  |                          | 100         |
|   |   |  |                          | 200         |
|   |   |  |                          | 250         |
|   |   |  |                          |             |


**Exact lengths:** 50.5 cm, 100.2 cm, 200 cm and 250 cm  
**Length of supply line:** 12 cm with plug connector

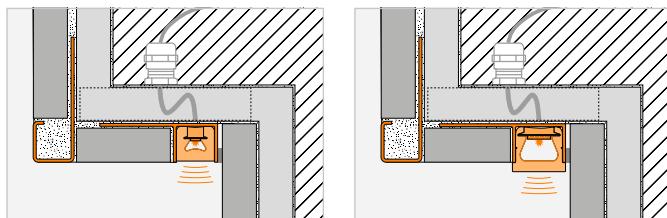

| PHOTOMETRIC DATA        |                           |     |                             |                    |     |              |                      |                          |
|-------------------------|---------------------------|-----|-----------------------------|--------------------|-----|--------------|----------------------|--------------------------|
| RATED OUTPUT (W / Unit) | NUMBER OF LEDs (LEDs / m) | CRI | COLOUR TEMPERATURE (Kelvin) | LIGHT CURRENT (lm) | EEC | kWh / 1000 h | DEGREE OF PROTECTION | LIGHT DIRECTIONS         |
| 1.60                    | 280                       | 92  | 3000                        | 80                 | E   | 2            | IP67                 | WARM WHITE/NEUTRAL WHITE |
| 1.60                    | 280                       | 92  | 4900                        | 84                 | E   | 2            |                      |                          |
| 4.40                    | 112                       | 90  | 2700                        | 156                | F   | 2            |                      |                          |
| 2.60                    | 280                       | 92  | 3000                        | 133                | E   | 3            |                      |                          |
| 2.60                    | 280                       | 92  | 4900                        | 141                | E   | 3            |                      |                          |
| 7.30                    | 112                       | 90  | 2700                        | 262                | F   | 3            |                      |                          |
| 3.50                    | 280                       | 92  | 3000                        | 187                | E   | 4            |                      |                          |
| 3.50                    | 280                       | 92  | 4900                        | 197                | E   | 4            |                      |                          |
| 10.10                   | 112                       | 90  | 2700                        | 364                | F   | 3            |                      |                          |

The specified light current refers to the entire light-emitting surface of the LED tube and may be reduced in the installed state, depending on the profile material and geometry.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.

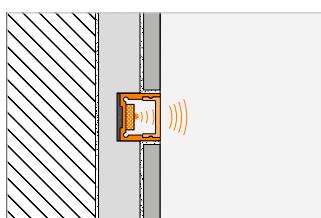

| PHOTOMETRIC DATA     |                           |     |                             |                        |     |              |                      |                  |
|----------------------|---------------------------|-----|-----------------------------|------------------------|-----|--------------|----------------------|------------------|
| RATED OUTPUT (W / m) | NUMBER OF LEDs (LEDs / m) | CRI | COLOUR TEMPERATURE (Kelvin) | LIGHT CURRENT (lm / m) | EEC | kWh / 1000 h | DEGREE OF PROTECTION | LIGHT DIRECTIONS |
| 15                   | 112                       | 90  | 2700                        | 323                    | F   | 3            | IP67                 |                  |
|                      |                           |     |                             | 323                    | F   | 5            |                      |                  |
|                      |                           |     |                             | 323                    | F   | 9            |                      |                  |
|                      |                           |     |                             | 323                    | F   | 11           |                      |                  |

**Note:** LED strips can be shortened every 62.5 mm.

Max. length of aligned LED modules in the LIPROTEC-EASY System: 6 m

The specified energy efficiency classes refer to the light-emitting surface of the LED strip. This surface is determined by the profile geometry.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.



## Schlüter®-LIPROTEC-LLPM

Schlüter-LIPROTEC-LLPM are plug-and-play LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of aluminium or brushed stainless steel V4A with trapezoid perforated anchoring leg. The LED modules are available either with a fixed white-light colour temperature of 3000 K or 4900 K, or with a RGB+W colour range. The latter makes it possible to choose from more than 16 million hues and colour temperatures from 2500 K – 6500 K. The white LED module is available with an installation height of 11 mm, which means it can be installed flush with the tile. (Product data sheet 15.8)


| PROFILES / TYPE OF LIGHT  | APPLICATION AREA | PROPERTIES   | DIMENSIONS OF LED MODULE |             |
|---|------------------|--|--------------------------|-------------|
| WARM WHITE/NEUTRAL WHITE<br> | ALUMINIUM<br>V4A | <br><br><br><br><br><br><br><br><br> | WIDTH / HEIGHT (mm)      | LENGTH (cm) |
|   |                  |  | 12 mm                    | 50          |
|   |                  |  | 11 mm                    | 100         |
|   |                  |  | 12 mm                    | 200         |
|   |                  |  | 11 mm                    | 250         |
|   |                  |  | 17 mm                    | 50          |
|   |                  |  | 11 mm                    | 100         |
|   |                  |  | 17 mm                    | 200         |
|   |                  |  | 11 mm                    | 250         |
|   |                  |  | 3 mm                     |             |

**Exact lengths:** 50.5 cm, 100.2 cm, 200 cm and 250 cm


**Length of supply line:** 12 cm with plug connector

## Schlüter®-LIPROTEC-LLPE

Schlüter-LIPROTEC-LLPE are LED modules consisting of a fully encased LED strip with homogenous light dispersion and a carrier profile made of anodised aluminium. The LED module with RGB+W coloured light range makes it possible to choose from more than 16 million different hues and colour temperatures from 2500 K – 6500 K. With the LED module, accent lighting can be created at wall corners. It is suitable for use in internal and external corners in the shower, preferably positioned vertically. (Product data sheet 15.8)
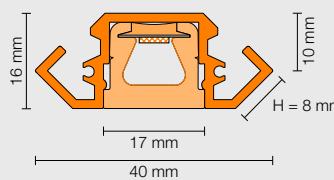
| PROFILES / TYPE OF LIGHT   | APPLICATION AREA | PROPERTIES   | DIMENSIONS OF LED MODULE |             |
|--|------------------|--|--------------------------|-------------|
| RGB+W<br> | ALUMINIUM        | <br><br><br><br><br><br><br> | WIDTH / HEIGHT (mm)      | LENGTH (cm) |
|  |                  |  | 16 mm                    | 250         |
|  |                  |    |                          |             |

**Length of supply line:** 12 cm with plug connector

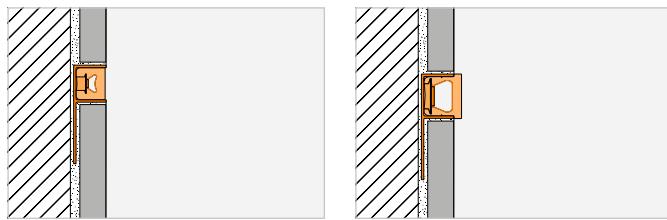

## PHOTOMETRIC DATA


| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 5                       | 280                          | 92  | 3000 / 4900                       | 242 / 274                 | E / E | 3 / 3           | IP67                    |                  |  |
|                         |                              |     |                                   | 242 / 274                 | E / E | 6 / 6           |                         |                  |  |
|                         |                              |     |                                   | 242 / 274                 | E / E | 10 / 11         |                         |                  |  |
|                         |                              |     |                                   | 242 / 274                 | E / E | 13 / 13         |                         |                  |  |
| 15                      | 112                          | 90  | 2700                              | 375                       | F     | 3               | IP67                    |                  |  |
|                         |                              |     |                                   | 375                       | F     | 5               |                         |                  |  |
|                         |                              |     |                                   | 375                       | F     | 9               |                         |                  |  |
|                         |                              |     |                                   | 375                       | F     | 11              |                         |                  |  |

**Note:** LED strips can be shortened every 25 mm (warm white/neutral white) or 62.5 mm (RGB+W).

Max. length of aligned LED modules in the LIPROTEC-EASY System: RGB+W = 6 m, white = 18 m

The specified light current refers to the entire light-emitting surface of the LED tube and may be reduced in the installed state, depending on the profile material and geometry.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.

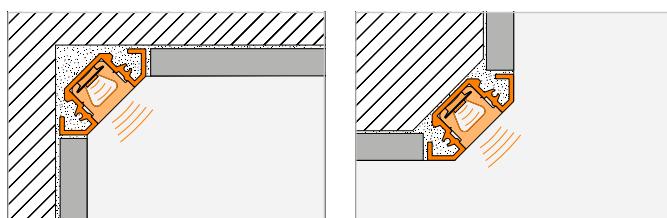

## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LED <sub>s</sub><br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|--|-----|-----------------------------------|---------------------------|-----|-----------------|-------------------------|------------------|--|
| 15                      | 112                                      | 90  | 2700                              | 323                       | F   | 11              | IP67                    |                  |  |

**Note:** LED strips can be shortened every 62.5 mm.

Max. length of aligned LED modules in the LIPROTEC-EASY System: 6 m

The specified energy efficiency classes refer to the light-emitting surface of the LED strip. This surface is determined by the profile geometry. In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.



## Schlüter®-LIPROTEC-LL

Schlüter-LIPROTEC-LL is a high quality, anodised aluminium carrier profile for creating accent lighting in wall coverings and ceilings. The illumination is provided by Schlüter-LIPROTEC-ES LED strips laid into the U-shaped profile, in combination with the corresponding diffuser lens. Various direct or indirect light effects are created according to the positioning of the profile. (Product data sheet 15.5)

| PROFILES / TYPE OF LIGHT | APPLICATION AREA |  | PROFILE DIMENSIONS  | DIMENSIONS LED STRIPS |             |
|--------------------------|------------------|--|---------------------|-----------------------|-------------|
|                          | ALUMINIUM        |  | WIDTH / HEIGHT (mm) | LENGTH (m)            | LENGTH (cm) |
| WARM WHITE/NEUTRAL WHITE |                  |  |                     |                       | 50          |
|                          |                  |  |                     |                       | 100         |
|                          |                  |  |                     |                       | 150         |
|                          |                  |  |                     |                       | 200         |
|                          |                  |  |                     |                       | 250         |
|                          |                  |  |                     |                       | 400         |
| RGB+W                    |                  |  |                     | 2.5                   | 50          |
|                          |                  |  |                     |                       | 100         |
|                          |                  |  |                     |                       | 150         |
|                          |                  |  |                     |                       | 200         |
|                          |                  |  |                     |                       | 250         |
|                          |                  |  |                     |                       | 400         |


Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

## Schlüter®-LIPROTEC-LLE

Schlüter-LIPROTEC-LLE is a high quality carrier profile made of anodised or white coated aluminium for mounting the Schlüter-LIPROTEC-ES LED strips. The profile is designed to create accent lighting in wall corners. It is suitable for use in internal and external corners in horizontal or vertical alignment. With the use of the respective pre-fabricated parts, it can also be installed continuously around corners. The profile can either be simply attached to any suitable substrate with a clip system or is embedded in the tile adhesive. For lighting, the selected LIPROTEC-ES LED strip is adhered within the profile and covered with the corresponding diffuser lens. (Product data sheet 15.7)

| PROFILES / TYPE OF LIGHT | APPLICATION AREA |  | PROFILE DIMENSIONS  | DIMENSIONS LED STRIPS |             |
|--------------------------|------------------|--|---------------------|-----------------------|-------------|
|                          | ALUMINIUM        |  | WIDTH / HEIGHT (mm) | LENGTH (m)            | LENGTH (cm) |
| WARM WHITE/NEUTRAL WHITE |                  |  |                     |                       | 50          |
|                          |                  |  |                     |                       | 100         |
|                          |                  |  |                     |                       | 150         |
|                          |                  |  |                     |                       | 200         |
|                          |                  |  |                     |                       | 250         |
|                          |                  |  |                     |                       | 400         |
| RGB+W                    |                  |  |                     | 2.5                   | 50          |
|                          |                  |  |                     |                       | 100         |
|                          |                  |  |                     |                       | 150         |
|                          |                  |  |                     |                       | 200         |
|                          |                  |  |                     |                       | 250         |
|                          |                  |  |                     |                       | 400         |

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

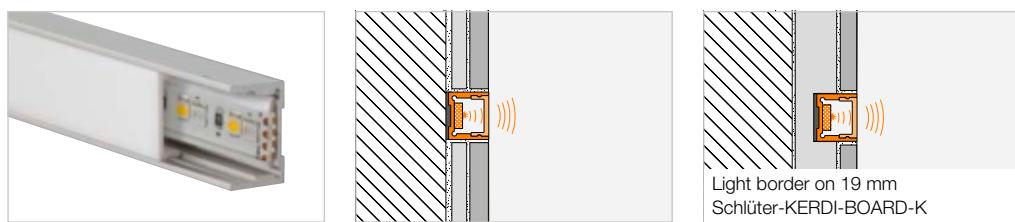


## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3400 / 4900                       | 708 / 700                 | F / F | 4 / 4           | IP67                    |                  |  |
|                         |                              |     |                                   | 730 / 752                 | E / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 746 / 721                 | E / E | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 719 / 756                 | E / E | 14 / 15         |                         |                  |  |
|                         |                              |     |                                   | 771 / 741                 | E / E | 18 / 17         |                         |                  |  |
|                         |                              |     |                                   | 666 / 633                 | E / F | 26 / 26         |                         |                  |  |
|                         | 15.0                         | 85  | 2700                              | 387                       | G     | 4               |                         |                  |  |
|                         |                              |     |                                   | 393                       | G     | 7               |                         |                  |  |
|                         |                              |     |                                   | 403                       | G     | 8               |                         |                  |  |
|                         |                              |     |                                   | 406                       | G     | 12              |                         |                  |  |
|                         |                              |     |                                   | 405                       | G     | 15              |                         |                  |  |
|                         |                              |     |                                   | 375                       | G     | 24              |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).

The specified energy efficiency classes exclusively refer to the LED strip.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.

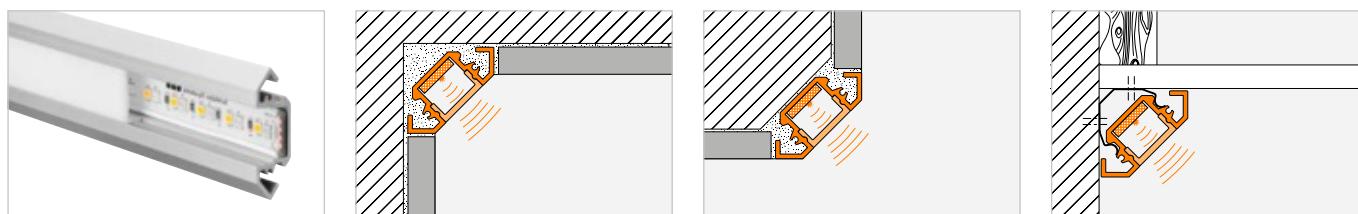

## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3400 / 4900                       | 708 / 700                 | F / F | 4 / 4           | IP67                    |                  |  |
|                         |                              |     |                                   | 730 / 752                 | E / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 746 / 721                 | E / E | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 719 / 756                 | E / E | 14 / 15         |                         |                  |  |
|                         |                              |     |                                   | 771 / 741                 | E / E | 18 / 17         |                         |                  |  |
|                         |                              |     |                                   | 666 / 633                 | E / F | 26 / 26         |                         |                  |  |
|                         | 15.0                         | 85  | 2700                              | 387                       | G     | 4               |                         |                  |  |
|                         |                              |     |                                   | 393                       | G     | 7               |                         |                  |  |
|                         |                              |     |                                   | 403                       | G     | 8               |                         |                  |  |
|                         |                              |     |                                   | 406                       | G     | 12              |                         |                  |  |
|                         |                              |     |                                   | 405                       | G     | 15              |                         |                  |  |
|                         |                              |     |                                   | 375                       | G     | 24              |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).



The specified energy efficiency classes exclusively refer to the LED strip.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.



## Schlüter®-LIPROTEC-WS



Schlüter-LIPROTEC-WS is a high quality carrier profile of anodised aluminium for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation. (Product data sheet 15.2)

| PROFILES / TYPE OF LIGHT     | APPLICATION AREA  | PROPERTIES   | PROFILE DIMENSIONS  | DIMENSIONS LED STRIPS   |
|------------------------------|---|--|---|---|
|                              | ALUMINIUM   |  | WIDTH / HEIGHT (mm)   | LENGTH (m)  |
| WARM WHITE/<br>NEUTRAL WHITE | <br>vertical installation only | <br><b>IP67</b> | INDIRECT  | <br>1 |
|                              |   |  | DIRECT  |   |
|                              |   |  | <br>not in the shower  | 1.5   |
|                              |   |  |   |   |
|                              |   |  |   |   |
|                              |   |  | <br>not in the shower | 2.5   |
|                              |   |  |   |   |
|                              |   |  |   |   |
|                              |   |  |   |   |
|                              |   |  |   |   |

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

## Schlüter®-LIPROTEC-WSK



Schlüter-LIPROTEC-WSK is a high quality, anodised aluminium carrier profile for illuminating protruding wall panels with various Schlüter-LIPROTEC-ES LED strips laid into the profile. Differing light effects are created in combination with two different diffuser lenses. Recessed, indirect or narrow illumination for wall protrusions are created in this way. An integrated cable duct with milling grooves for cable installation and a support bracket for Schlüter-KERDI-BOARD (19 mm) aid the installation process. (Product data sheet 15.2)
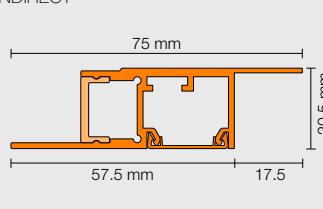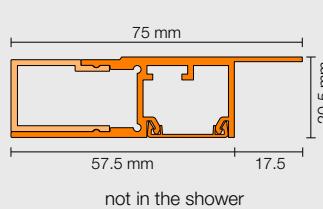
| PROFILES / TYPE OF LIGHT     | APPLICATION AREA  | PROPERTIES   | PROFILE DIMENSIONS  | DIMENSIONS LED STRIPS   |  |
|------------------------------|---|--|---|---|--|
|                              | ALUMINIUM   |  | WIDTH / HEIGHT (mm)   | LENGTH (m)  |  |
| WARM WHITE/<br>NEUTRAL WHITE | <br>vertical installation only | <br><b>IP67</b> | INDIRECT  | <br>2.5 |  |
|                              |   |  | DIRECT  |   |  |
|                              |   |  | <br>not in the shower |   |  |
|                              |   |  |   |   |  |
|                              |   |  |   |   |  |
|                              |   |  | 50  |   |  |
|                              |   |  |   |   |  |
|                              |   |  |   |   |  |
|                              |   |  |   |   |  |
|                              |   |  |   |   |  |

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.



EASY

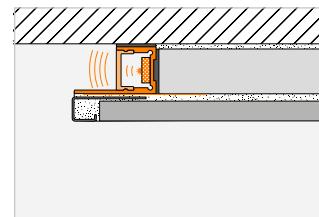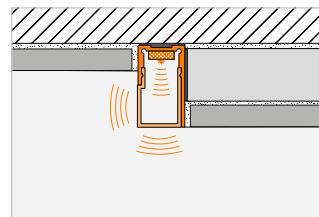



## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3400 / 4900                       | 708 / 700                 | F / F | 4 / 4           | IP67                    | INDIRECT         |  |
|                         |                              |     |                                   | 730 / 752                 | E / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 746 / 721                 | E / E | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 719 / 756                 | E / E | 14 / 15         |                         |                  |  |
|                         |                              |     |                                   | 771 / 741                 | E / E | 18 / 17         |                         |                  |  |
|                         |                              |     |                                   | 666 / 633                 | E / F | 26 / 26         |                         |                  |  |
|                         | 192<br>(96 RGB + 96 W)       | 85  | 2700                              | 387                       | G     | 4               |                         | DIRECT           |  |
|                         |                              |     |                                   | 393                       | G     | 7               |                         |                  |  |
|                         |                              |     |                                   | 403                       | G     | 8               |                         |                  |  |
|                         |                              |     |                                   | 406                       | G     | 12              |                         |                  |  |
|                         |                              |     |                                   | 405                       | G     | 15              |                         |                  |  |
|                         |                              |     |                                   | 375                       | G     | 24              |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).

The specified energy efficiency classes exclusively refer to the LED strip.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.

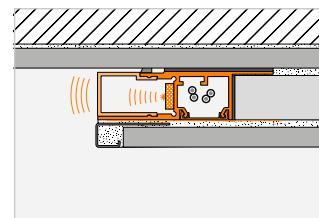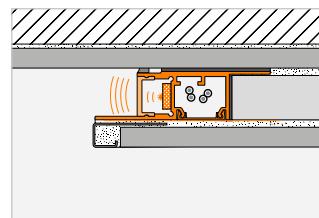

## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3400 / 4900                       | 708 / 700                 | F / F | 4 / 4           | IP67                    | INDIRECT         |  |
|                         |                              |     |                                   | 730 / 752                 | E / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 746 / 721                 | E / E | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 719 / 756                 | E / E | 14 / 15         |                         |                  |  |
|                         |                              |     |                                   | 771 / 741                 | E / E | 18 / 17         |                         |                  |  |
|                         |                              |     |                                   | 666 / 633                 | E / F | 26 / 26         |                         |                  |  |
|                         | 192<br>(96 RGB + 96 W)       | 85  | 2700                              | 387                       | G     | 4               |                         | DIRECT           |  |
|                         |                              |     |                                   | 393                       | G     | 7               |                         |                  |  |
|                         |                              |     |                                   | 403                       | G     | 8               |                         |                  |  |
|                         |                              |     |                                   | 406                       | G     | 12              |                         |                  |  |
|                         |                              |     |                                   | 405                       | G     | 15              |                         |                  |  |
|                         |                              |     |                                   | 375                       | G     | 24              |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).

The specified energy efficiency classes exclusively refer to the LED strip.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.

CONTROL





PLAN





## Schlüter®-LIPROTEC-WSQ



Schlüter-LIPROTEC-WSQ is a high quality carrier profile of anodised aluminium for illuminating raised wall panels with various Schlüter-LIPROTEC-ES LED strips integrated into the profile. Differing light effects are created in combination with two different diffuser lenses. The assembly can be used to create recessed direct or indirect lighting for on-wall structures. LIPROTEC-WSQ features a formed cover finish with timelessly modern Schlüter-QUADEC design. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation. (Product data sheet 15.2)
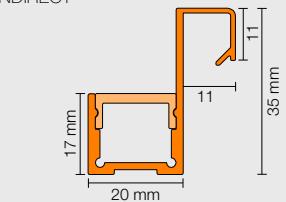
| PROFILES / TYPE OF LIGHT | APPLICATION AREA   | PROPERTIES   | PROFILE DIMENSIONS   | DIMENSIONS LED STRIPS                 |
|--------------------------|--|--|--|---------------------------------------|
|                          | ALUMINIUM  |  | WIDTH / HEIGHT (mm)  | LENGTH (m)                            |
| WARM WHITE/NEUTRAL WHITE | <br><br><br> | <br><b>IP67</b> | <b>INDIRECT</b><br><br><b>DIRECT</b><br> <p>not in the shower</p> | 2.5                                   |
| RGB+W                    |  |  |  | 50<br>100<br>150<br>200<br>250<br>400 |
|                          |  |  |  | 50<br>100<br>150<br>200<br>250<br>400 |



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

## Schlüter®-LIPROTEC-PB

Schlüter-LIPROTEC-PB is a high quality edge profile of anodised aluminium with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used with Schlüter-TREP stair nosing profiles to create appealing lighting along the edges of platforms. Differing light effects are created in combination with two different diffuser lenses. Edges can either be illuminated indirectly or directly by adding a 3 mm light strip. Another application area of LIPROTEC-PB is the direct or indirect illumination of work surface front edges. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation. (Product data sheet 15.4)

| PROFILES / TYPE OF LIGHT   | APPLICATION AREA  | PROPERTIES   | PROFILE DIMENSIONS  | DIMENSIONS LED STRIPS                 |
|----------------------------|---|--|---|---------------------------------------|
|                            | ALUMINIUM   |  | WIDTH / HEIGHT (mm)   | LENGTH (m)                            |
| WARM WHITE / NEUTRAL WHITE |  | <br><b>IP65</b> | <b>INDIRECT</b><br><br><b>DIRECT</b><br> | 1<br>1.5<br>2.5                       |
|                            |   |  |   | 50<br>100<br>150<br>200<br>250<br>400 |

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

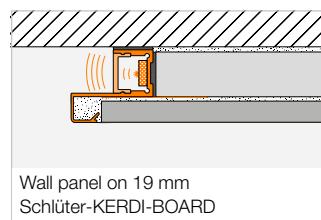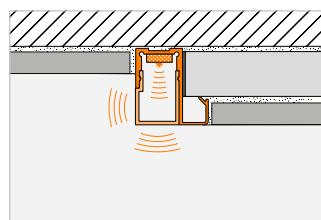Wall panel on 19 mm  
Schlüter-KERDI-BOARD



## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3400 / 4900                       | 708 / 700                 | F / F | 4 / 4           | IP67                    | INDIRECT         |  |
|                         |                              |     |                                   | 730 / 752                 | E / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 746 / 721                 | E / E | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 719 / 756                 | E / E | 14 / 15         |                         |                  |  |
|                         |                              |     |                                   | 771 / 741                 | E / E | 18 / 17         |                         |                  |  |
|                         |                              |     |                                   | 666 / 633                 | E / F | 26 / 26         |                         |                  |  |
| 15                      | 192<br>(96 RGB + 96 W)       | 85  | 2700                              | 387                       | G     | 4               | IP67                    | DIRECT           |  |
|                         |                              |     |                                   | 393                       | G     | 7               |                         |                  |  |
|                         |                              |     |                                   | 403                       | G     | 8               |                         |                  |  |
|                         |                              |     |                                   | 406                       | G     | 12              |                         |                  |  |
|                         |                              |     |                                   | 405                       | G     | 15              |                         |                  |  |
|                         |                              |     |                                   | 375                       | G     | 24              |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white) or 62.5 mm (RGB+W).

The specified energy efficiency classes exclusively refer to the LED strip.

In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.

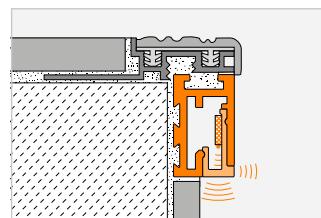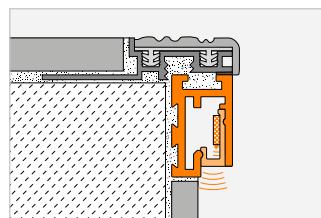

## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3200 / 4900                       | 610 / 650                 | F / F | 4 / 4           | IP65                    | INDIRECT         |  |
|                         |                              |     |                                   | 614 / 621                 | F / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 603 / 636                 | F / F | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 621 / 637                 | F / F | 15 / 15         |                         |                  |  |
|                         |                              |     |                                   | 566 / 630                 | F / F | 18 / 18         |                         |                  |  |
|                         |                              |     |                                   | 541 / 587                 | F / F | 26 / 27         |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white).


The specified energy efficiency classes exclusively refer to the LED strip.



## Schlüter®-DESIGNBASE-QD

Schlüter-DESIGNBASE-QD is a high quality profile of anodised aluminium for versatile applications. It is designed for mounting various Schlüter-LIPROTEC-ES LED strips as a skirting or border profile in wall areas. A 39 mm diffuser lens is then used between the 10 mm wide (approx.) visible areas of the profile to create direct illumination. Other decorative materials such as tiles or wooden elements can also be inserted in the open space. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation.


(Product data sheet 16.1)

| PROFILES / TYPE OF LIGHT   | APPLICATION AREA  | PROPERTIES   | PROFILE DIMENSIONS  | DIMENSIONS LED STRIPS |
|----------------------------|---|--|---|-----------------------|
|                            | ALUMINIUM   |  | WIDTH / HEIGHT (mm)   | LENGTH (m)            |
| WARM WHITE / NEUTRAL WHITE | <br>vertical installation only<br><br> | <br> |  | 2.5                   |
|                            |   |  |   | LENGTH (cm)           |
|                            |   |  |   | 50                    |
|                            |   |  |   | 100                   |
|                            |   |  |   | 150                   |
|                            |   |  |   | 200                   |
|                            |   |  |   | 250                   |
|                            |   |  |   | 400                   |



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

## Schlüter®-LIPROTEC-VB

Schlüter-LIPROTEC-VB is a high quality tile finishing profile for wall areas, with a visible area of 25 mm. It is designed for mounting Schlüter-LIPROTEC-ES LED strips and can be used to create varying light effects in combination with two different diffuser lenses. Indirect light can either radiate from the profile edge to the ceiling via adjoining materials or along the skirting. Additionally, a 3 mm light strip can create direct light. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation. (Product data sheet 15.1)

| PROFILES / TYPE OF LIGHT   | APPLICATION AREA  | PROPERTIES   | PROFILE DIMENSIONS   | DIMENSIONS LED STRIPS |
|----------------------------|---|--|--|-----------------------|
|                            | ALUMINIUM   |  | WIDTH / HEIGHT (mm)  | LENGTH (m)            |
| WARM WHITE / NEUTRAL WHITE |  | <br> | INDIRECT<br><br>DIRECT<br> | 1                     |
|                            |   |  |  | 50                    |
|                            |   |  |  | 100                   |
|                            |   |  |  | 150                   |
|                            |   |  |  | 200                   |
|                            |   |  |  | 250                   |
|                            |   |  |  | 400                   |

Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

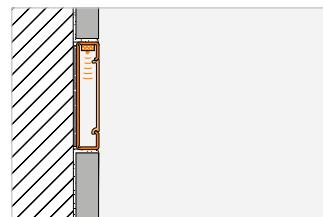
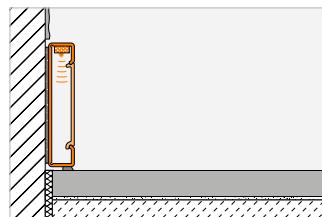


## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3400 / 4900                       | 771 / 757                 | F / F | 4 / 4           | IP67                    |                  |  |
|                         |                              |     |                                   | 772 / 794                 | F / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 880 / 817                 | E / E | 12 / 12         |                         |                  |  |
|                         |                              |     |                                   | 801 / 780                 | E / E | 15 / 15         |                         |                  |  |
|                         |                              |     |                                   | 785 / 799                 | E / E | 18 / 18         |                         |                  |  |
|                         |                              |     |                                   | 725 / 693                 | E / E | 27 / 25         |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white).

The specified energy efficiency classes exclusively refer to the LED strip.

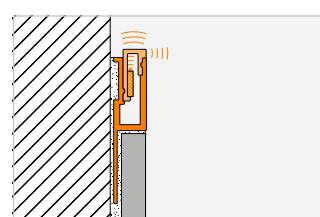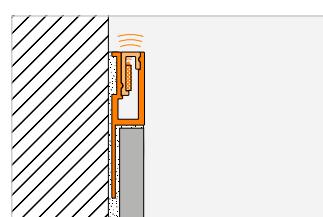

## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3200 / 4900                       | 610 / 650                 | F / F | 4 / 4           | IP65                    | <br>             |  |
|                         |                              |     |                                   | 614 / 621                 | F / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 603 / 636                 | F / F | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 621 / 637                 | F / F | 15 / 15         |                         |                  |  |
|                         |                              |     |                                   | 566 / 630                 | F / F | 18 / 18         |                         |                  |  |
|                         |                              |     |                                   | 541 / 587                 | F / F | 26 / 27         |                         |                  |  |


**Note:** LED strips can be shortened every 50 mm (warm white/neutral white).

The specified energy efficiency classes exclusively refer to the LED strip.



## Schlüter®-LIPROTEC-D


Schlüter-LIPROTEC-D is a decorative carrier profile for wall areas of anodised aluminium with a visible area of 6 mm. It allows for the insertion of various decorative materials such as glass or mirrors to adjoin ceramic tile coverings. LIPROTEC-D can be used to mount Schlüter-LIPROTEC-ES LED strips for creating indirect light effects around a decorative element. The profile design allows for the easy replacement of the utilised diffuser lenses and bulbs, even after installation. (Product data sheet 15.3)

| PROFILES / TYPE OF LIGHT   | APPLICATION AREA   | PROPERTIES  | PROFILE DIMENSIONS  |            | DIMENSIONS LED STRIPS |
|----------------------------|--|---|---|------------|-----------------------|
|                            | ALUMINIUM  |   | WIDTH / HEIGHT (mm)   | LENGTH (m) | LENGTH (cm)           |
| WARM WHITE / NEUTRAL WHITE | <br> | <br><br> |  | 2.5        | 50                    |
|                            |  |   |   |            | 100                   |
|                            |  |   |   |            | 150                   |
|                            |  |   |   |            | 200                   |
|                            |  |   |   |            | 250                   |
|                            |  |   |   |            | 400                   |



Supply line: 3 m. The 400 cm LED strips are equipped with two supply lines each. The photometric data describes the LED strips only. The optical efficiency is influenced by the properties of the diffuser lens.

## Wall panel sets (WSK)

The wall panel sets with RGB+W light makes it easy to make a big impression. Simply select between the wide (128.5 cm) and narrow (70 cm) wall panels and order the practical profile set with it. Our RGB+W technology provides you with unlimited design freedom: more than 16 million hues turn your rooms into colour-flooded leisure zones. White hues from 2500 K – 6500 K let your wall panels radiate the same light as your existing ceiling light. If desired, it can be controlled with a Bluetooth receiver. The matching Schlüter-Systems app can be downloaded for free from Google Play (Android™) or the Apple App Store (iOS).
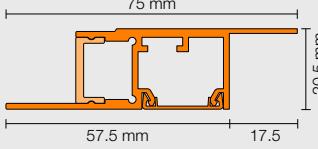
| PROFILES / TYPE OF LIGHT | APPLICATION AREA  | PROPERTIES  | PROFILE DIMENSIONS   |            | DIMENSIONS LED STRIPS |
|--------------------------|---|---|--|------------|-----------------------|
|                          | ALUMINIUM   |   | WIDTH / HEIGHT (mm)  | LENGTH (m) | LENGTH (cm)           |
| RGB+W                    | <br><br> |  | INDIRECT   |            |                       |
|                          |   |   |  | 2,5        | 250                   |

Supply line: 3 m. The photometric data describes the LED strips only.

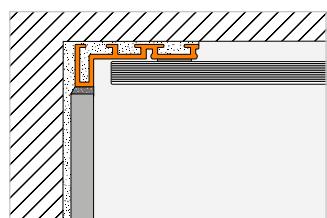
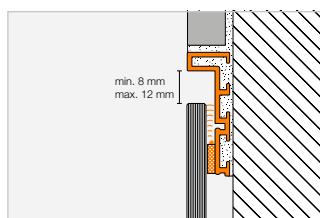


## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |  |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|--|
| 7.5                     | 140                          | 92  | 3200 / 4900                       | 610 / 650                 | F / F | 4 / 4           | IP65                    |                  |  |
|                         |                              |     |                                   | 614 / 621                 | F / F | 8 / 8           |                         |                  |  |
|                         |                              |     |                                   | 603 / 636                 | F / F | 11 / 11         |                         |                  |  |
|                         |                              |     |                                   | 621 / 637                 | F / F | 15 / 15         |                         |                  |  |
|                         |                              |     |                                   | 566 / 630                 | F / F | 18 / 18         |                         |                  |  |
|                         |                              |     |                                   | 541 / 587                 | F / F | 26 / 27         |                         |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white).

The specified energy efficiency classes exclusively refer to the LED strip.

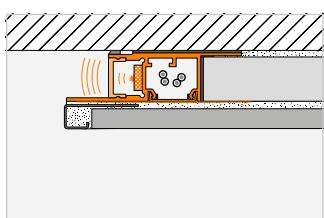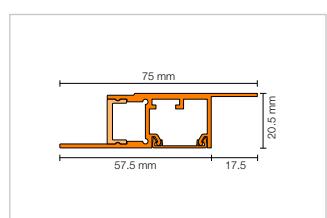

## PHOTOMETRIC DATA

| RATED OUTPUT<br>(W / m) | NUMBER OF LEDs<br>(LEDs / m) | CRI | COLOUR<br>TEMPERATURE<br>(Kelvin) | LIGHT CURRENT<br>(lm / m) | EEC   | kWh /<br>1000 h | DEGREE OF<br>PROTECTION | LIGHT DIRECTIONS |          |
|-------------------------|------------------------------|-----|-----------------------------------|---------------------------|-------|-----------------|-------------------------|------------------|----------|
| 15                      | 192<br>(96 RGB+96 W)         | 85  | 2700                              | 405                       | 2 x G | 2 x 15          | IP67                    |                  | INDIRECT |

**Note:** LED strips can be shortened every 62.5 mm (RGB+W).

The specified energy efficiency classes exclusively refer to the LED strip.


In the case of RGB+W LEDs, light current, energy efficiency class and weighted consumption refer to white light only.



## Staircase sets (PB)

Schlüter-LIPROTEC-PB stair sets put light where it is needed: in the middle of the stair step. The PB 15 sets for 15 steps have 60 cm wide LED modules pre-mounted in the middle. With their diffuser lenses, they provide indirect illumination with a discreet line of light. The combinations of aluminium carrier profile and diffuser lens are 100/150 cm long and can be shortened individually as required. The LED modules have a 4500 K neutral white colour temperature and are cabled by means of a simple coupling system; a 500 cm connection cable and power supply are included in the set.


If that isn't enough, the stair set can easily be expanded to 18 steps with only one supply line. With this in mind, use the Schlüter-LIPROTEC-PB 1 single-step sets.

| PROFILES / TYPE OF LIGHT | APPLICATION AREA   | PROPERTIES  | PROFILE DIMENSIONS   | DIMENSIONS LED STRIPS |                  |
|--------------------------|--|---|--|-----------------------|------------------|
|                          | ALUMINIUM  |   | WIDTH / HEIGHT (mm)  | LENGTH (m)            | LENGTH (cm)      |
| NEUTRAL WHITE            | <br> | <br><b>SET</b> | DIRECT<br> | 1                     | 60               |
|                          |  |   |  | 1.5                   | 60               |
|                          |  |   |  | 1<br>(15 units)       | 60<br>(15 units) |
|                          |  |   |  | 1.5<br>(15 units)     | 60<br>(15 units) |


The photometric data describes the LED strips only.

## Decorative frame sets (D)

Schlüter-LIPROTEC-D 90 are sets for creating illuminated decorative frames. With these sets, mirrors or design elements such as printed glass or decor panels can be elegantly framed with indirect LED lighting. The support profiles are already mitre-cut. Four matching Schlüter-LIPROTEC-ES-LED strips with a colour temperature of 3200 K (warm white) or 4900 K (neutral white) are included in the set, as well as the power supply unit and all material for assembly and wiring.

| PROFILES / TYPE OF LIGHT | APPLICATION AREA   | PROPERTIES  | PROFILE DIMENSIONS  | DIMENSIONS LED STRIPS |                            |
|--------------------------|--|---|---|-----------------------|----------------------------|
|                          | ALUMINIUM  |   | WIDTH / HEIGHT (mm)   | LENGTH (m)            | LENGTH (cm)                |
| S1 WARM WHITE            | <br> | <br><b>SET</b> |  | H = 9.0               | 1.185 / 0.935<br>(2 units) |
|                          |  |   |   |                       |                            |
| S2 NEUTRAL WHITE         |   |   |   |                       | 110 / 85<br>(2 units)      |

Supply line: 3 m. The photometric data describes the LED strips only.

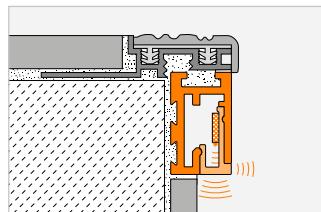


| PHOTOMETRIC DATA |                       |     |                             |                        |        |              |                      |                  |  |
|------------------|-----------------------|-----|-----------------------------|------------------------|--------|--------------|----------------------|------------------|--|
| RATED OUTPUT (W) | NUMBER OF LEDs (Unit) | CRI | COLOUR TEMPERATURE (Kelvin) | LIGHT CURRENT (lm / m) | EEC    | kWh / 1000 h | DEGREE OF PROTECTION | LIGHT DIRECTIONS |  |
| 3.7              | 72                    | 80  | 4500                        | 375                    | E      | 3            | IP20                 | DIRECT           |  |
|                  |                       |     |                             |                        | 15 x E | 15 x 3       |                      |                  |  |

**Note:** Single step sets are delivered with a 70 cm connecting cable.

Complete sets with 15 profiles are supplied with a 500 cm cable supply line and 14 x 70 cm connecting cables.

The specified energy efficiency classes exclusively refer to the LED strip.

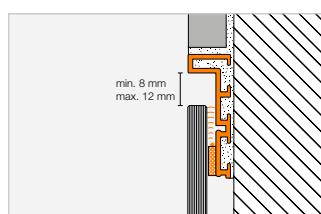

| PHOTOMETRIC DATA   |                           |     |                             |                        |       |                 |                      |                  |  |
|--------------------|---------------------------|-----|-----------------------------|------------------------|-------|-----------------|----------------------|------------------|--|
| RATED OUTPUT (Set) | NUMBER OF LEDs (LEDs / m) | CRI | COLOUR TEMPERATURE (Kelvin) | LIGHT CURRENT (lm / m) | EEC   | kWh / 1000 h    | DEGREE OF PROTECTION | LIGHT DIRECTIONS |  |
| 29,3               | 140                       | 92  | 3200                        | 595                    | 4 x F | 2 x 8<br>2 x 11 | IP65                 |                  |  |
|                    |                           |     |                             |                        |       |                 |                      |                  |  |
| 28,9               |                           |     | 4900                        | 609                    | 4 x F | 2 x 8<br>2 x 11 |                      |                  |  |
|                    |                           |     |                             |                        |       |                 |                      |                  |  |

**Note:** LED strips can be shortened every 50 mm (warm white/neutral white).

The energy efficiency class and the weighted consumption refer to the unshortened LED strips only.

The rated output describes the power rating for the LED strips that have been shortened to size for the installation.



## CLASSIC control

Schlüter®-LIPROTEC-PEBR | Schlüter®-LIPROTEC-EBR

### Technical specifications for control

|   | LT PEBR 1        | LT PEBR 4        | LT EBR 1            | LT EBR 4         |
|---|------------------|------------------|---------------------|------------------|
| Version                                       | EASY             | EASY             | PRO                 | PRO              |
| Receiver/remote control transmission standard | Bluetooth/radio  | Bluetooth/radio  | Bluetooth/radio     | Bluetooth/radio  |
| Use with LED modules                          | white            | RGB+W            | –                   | –                |
| Use with LED strips                           | –                | –                | LT ES 11 – LT ES 61 | LT ES 9          |
| Max. range                                    | 10 m             | 10 m             | 10 m                | 10 m             |
| Input voltage                                 | 24 V, DC         | 24 V, DC         | 24 V, DC            | 24 V, DC         |
| Max. total load in the LIPROTEC system        | 90 W             | 90 W             | 180 W               | 180 W            |
| Max. length LED strips                        | 18 m             | 6 m              | 24 m                | 12 m             |
| Degree of protection                          | IP 63            | IP 63            | IP 63               | IP 63            |
| Ambient temperature                           | –20 °C to +50 °C | –20 °C to +50 °C | –20 °C to +50 °C    | –20 °C to +50 °C |

## ZONES control

Schlüter®-LIPROTEC-PEBZS | Schlüter®-LIPROTEC-EBZS

### Technical specifications for ZONES starter sets

|  | LT PEB ZS 1      | LT PEB ZS 4      | LT PEB ZS 1/4              | LT EB ZS 1       | LT EB ZS 4       | LT EB ZS 1/4                |
|--|------------------|------------------|----------------------------|------------------|------------------|-----------------------------|
| Version                                | EASY             | EASY             | EASY                       | PRO              | PRO              | PRO                         |
| Transmission standard                  | Bluetooth Mesh   | Bluetooth Mesh   | Bluetooth Mesh             | Bluetooth Mesh   | Bluetooth Mesh   | Bluetooth Mesh              |
| Max. range                             | 10 m             | 10 m             | 10 m                       | 10 m             | 10 m             | 10 m                        |
| Input voltage                          | 24 V, DC         | 24 V, DC         | 24 V, DC                   | 24 V, DC         | 24 V, DC         | 24 V, DC                    |
| Max. total load in the LIPROTEC system | 2 x 90 W         | 2 x 90 W         | 2 x 90 W                   | 2 x 180 W        | 2 x 180 W        | 2 x 180 W                   |
| Max. length LED strips                 | 2 x 18 m         | 2 x 6 m          | white: 18 m.<br>RGB+W: 6 m | 2 x 24 m         | 2 x 12 m         | white: 24 m.<br>RGB+W: 12 m |
| Degree of protection                   | IP 63            | IP 63            | IP 63                      | IP 63            | IP 63            | IP 63                       |
| Ambient temperature                    | –20 °C to +50 °C | –20 °C to +50 °C | –20 °C to +50 °C           | –20 °C to +50 °C | –20 °C to +50 °C | –20 °C to +50 °C            |

Schlüter®-LIPROTEC-PEBZR | Schlüter®-LIPROTEC-EBZR

### Technical specifications for ZONES receivers

|  | LT PEB ZR 1      | LT PEB ZR 4      | LT EB ZR 1       | LT EB ZR 4       |
|--|------------------|------------------|------------------|------------------|
| Version                                | EASY             | EASY             | PRO              | PRO              |
| Transmission standard                  | Bluetooth Mesh   | Bluetooth Mesh   | Bluetooth Mesh   | Bluetooth Mesh   |
| Max. range                             | 10 m             | 10 m             | 10 m             | 10 m             |
| Input voltage                          | 24 V, DC         | 24 V, DC         | 24 V, DC         | 24 V, DC         |
| Max. total load in the LIPROTEC system | 90 W             | 90 W             | 180 W            | 180 W            |
| Max. length LED strips                 | 18 m             | 6 m              | 24 m             | 12 m             |
| Degree of protection                   | IP 63            | IP 63            | IP 63            | IP 63            |
| Ambient temperature                    | –20 °C to +50 °C |

# CLASSIC/ZONES rotary control

Schlüter®-LIPROTEC-ERP | Schlüter®-LIPROTEC-ERPZ

## Technical specifications for rotary control

|                       | LT ERP             | LT ERPZ          |
|-----------------------|--------------------|------------------|
| Version               | CLASSIC            | ZONES            |
| Transmission standard | Radio (433.92 MHz) | Bluetooth Mesh   |
| Max. range            | 10 m               | 10 m             |
| Battery type          | CR2032             | CR2032           |
| Degree of protection  | IP 20              | IP 20            |
| Ambient temperature   | +10 °C to +50 °C   | +10 °C to +50 °C |


### Note:

The rotary control must be protected against direct exposure to water.  
It can only be combined with flat frames measuring 55 x 55 mm.





## LIPROTEC-EASY-CLASSIC wiring diagrams

LED module *ww/ww*

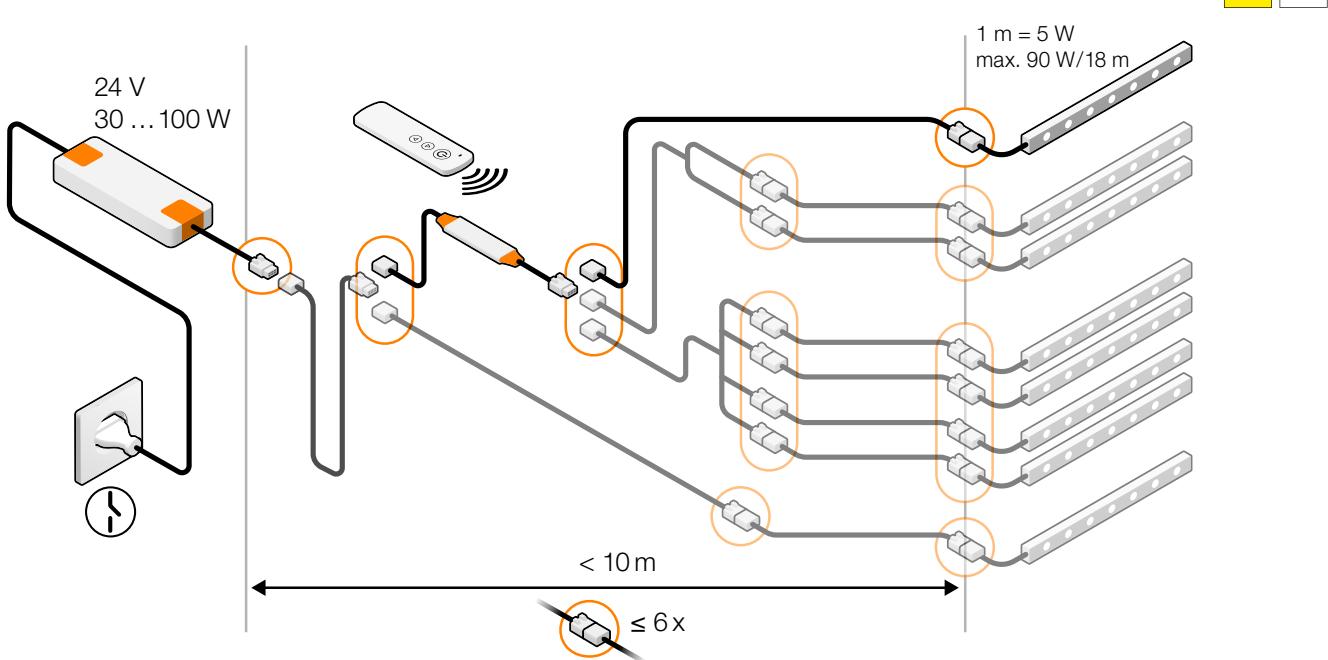


LED module *RGB+W*

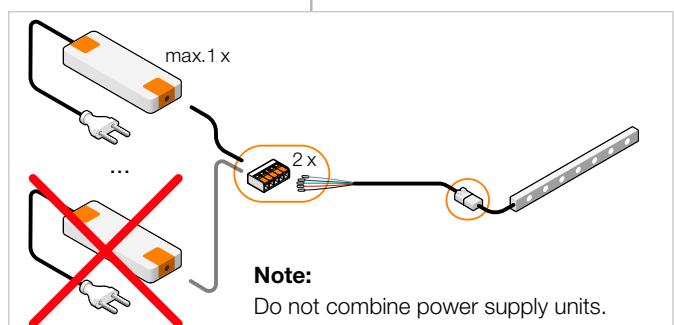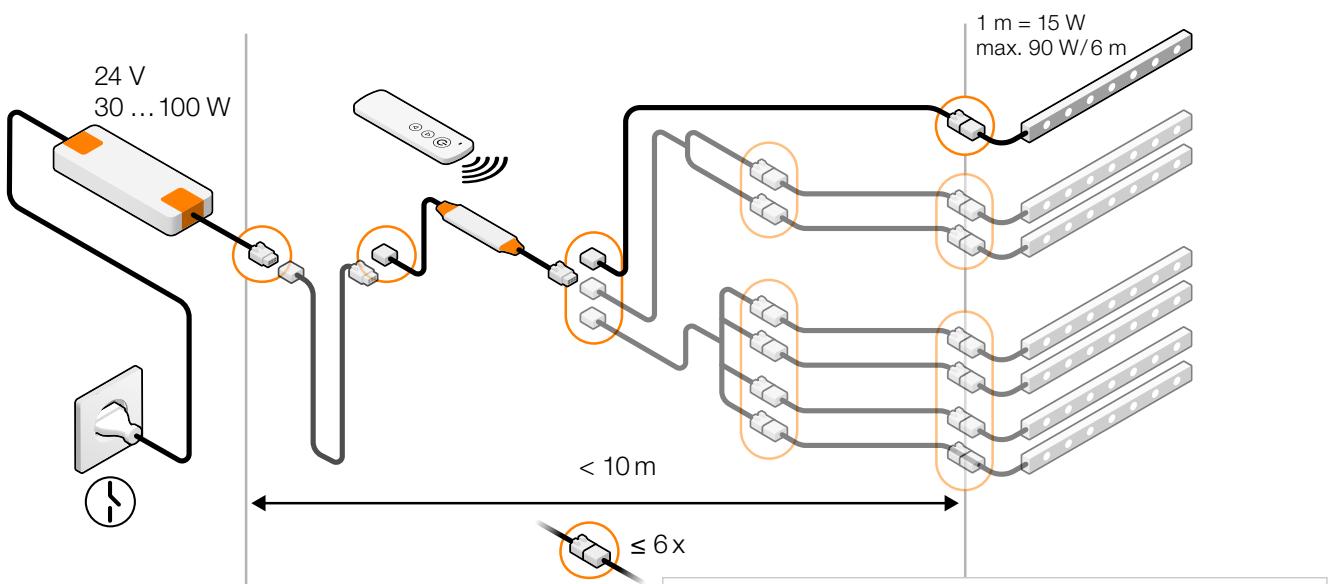


## LIPROTEC-EASY and -PRO-CLASSIC wiring diagrams using an adapter

LED module *ww/ww*

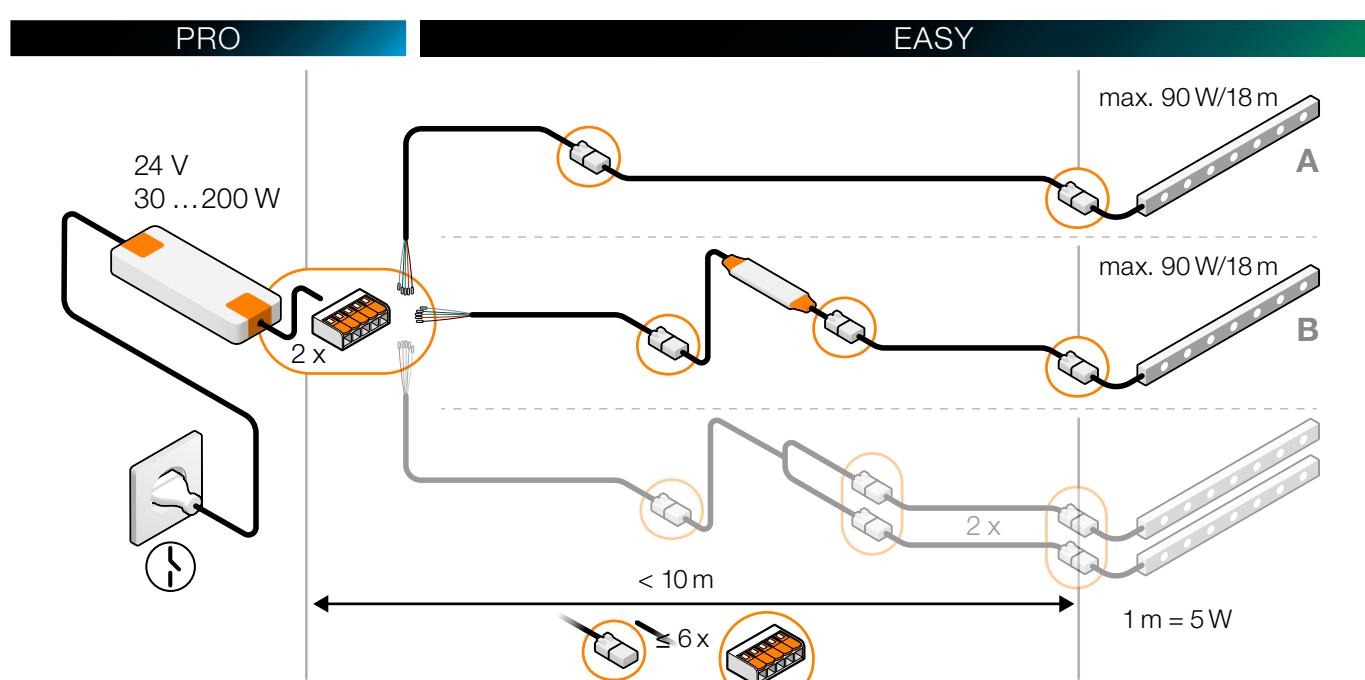

**Note:** Max. length of LED modules in a row in the LIPROTEC-EASY system when using the plug-and-play adapter: 18 m per cable strand (A or B) depending on the power supply unit used.

LED module *RGB+W*

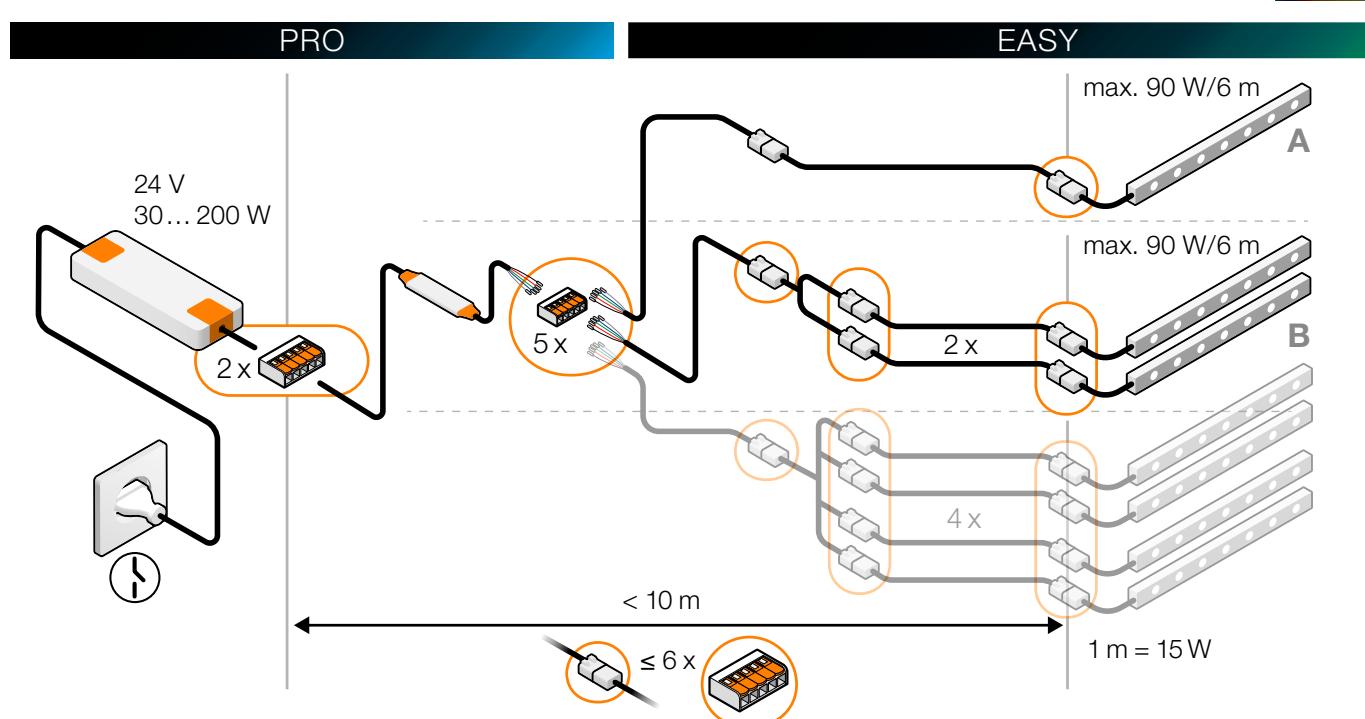


**Note:** Max. length of LED modules in a row in the LIPROTEC-EASY system when using the plug-and-play adapter: 6 m per cable strand (A or B) depending on the power supply unit used.




## LIPROTEC-PRO wiring diagrams

Use of Wago connectors in the PRO system

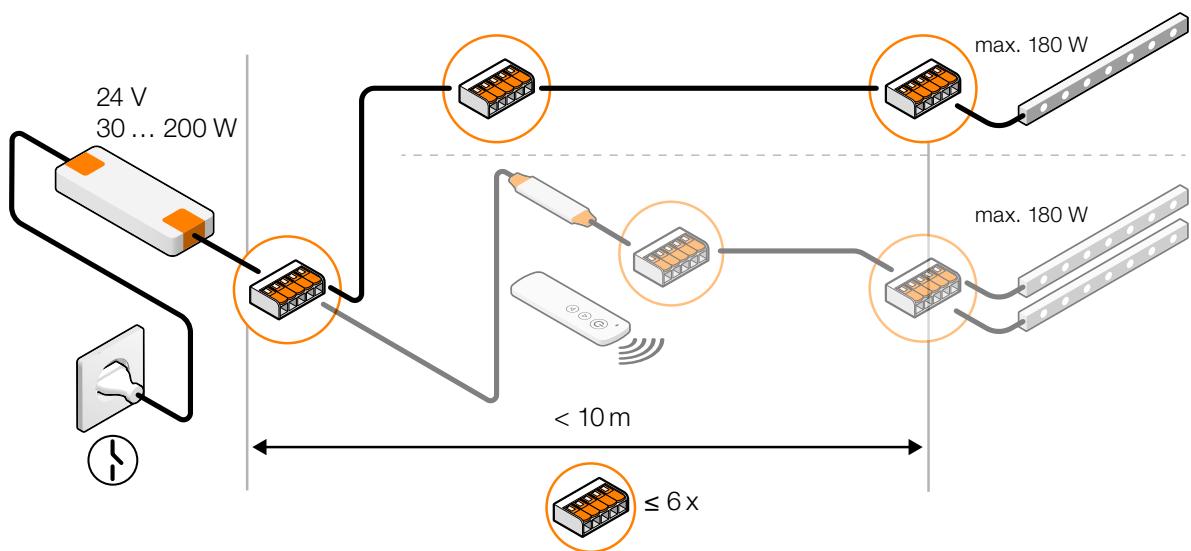

## LIPROTEC-EASY-ZONES wiring diagrams

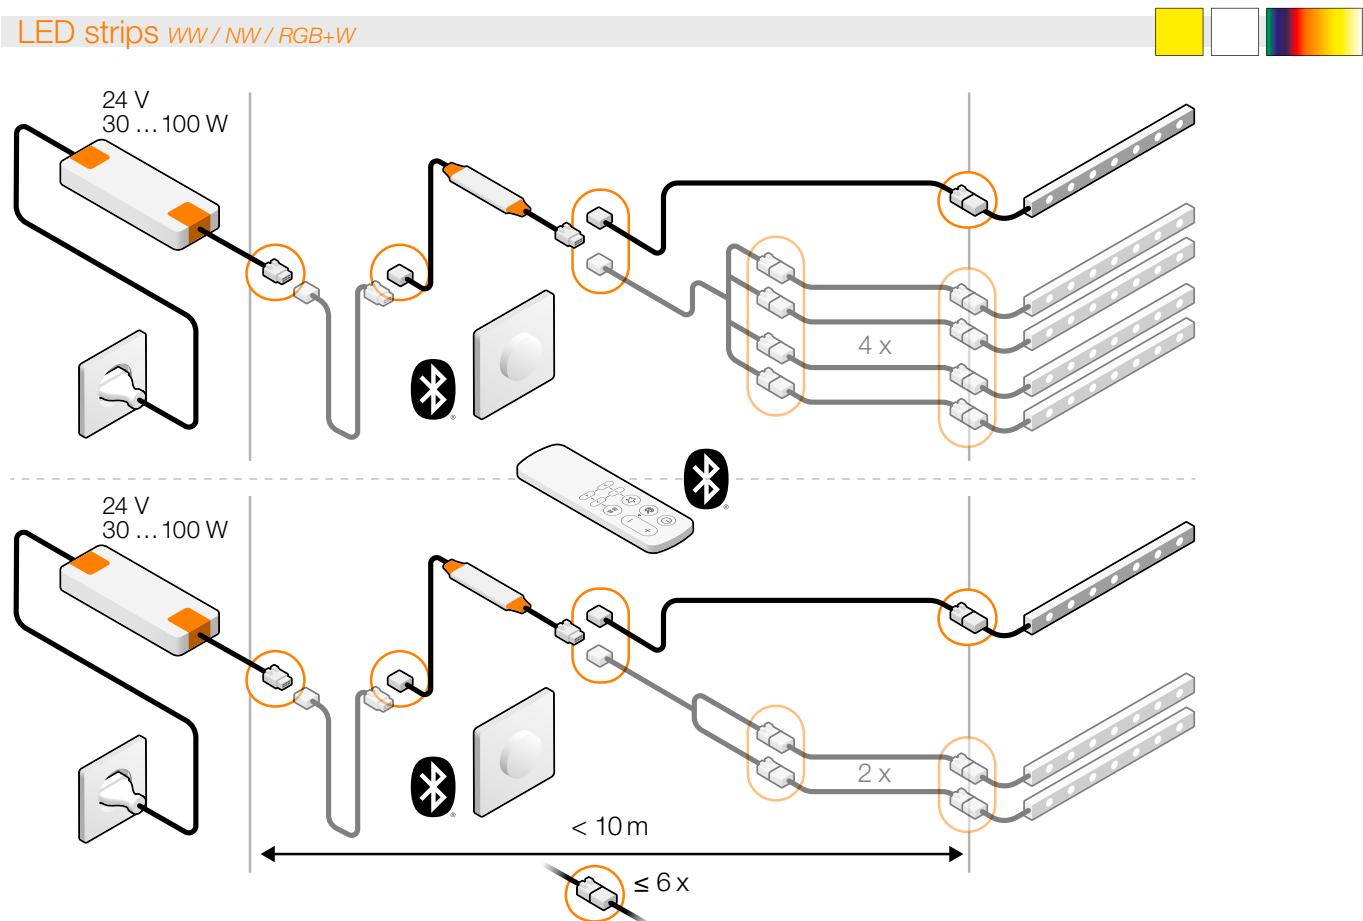





## Schlüter®-LIPROTEC application areas





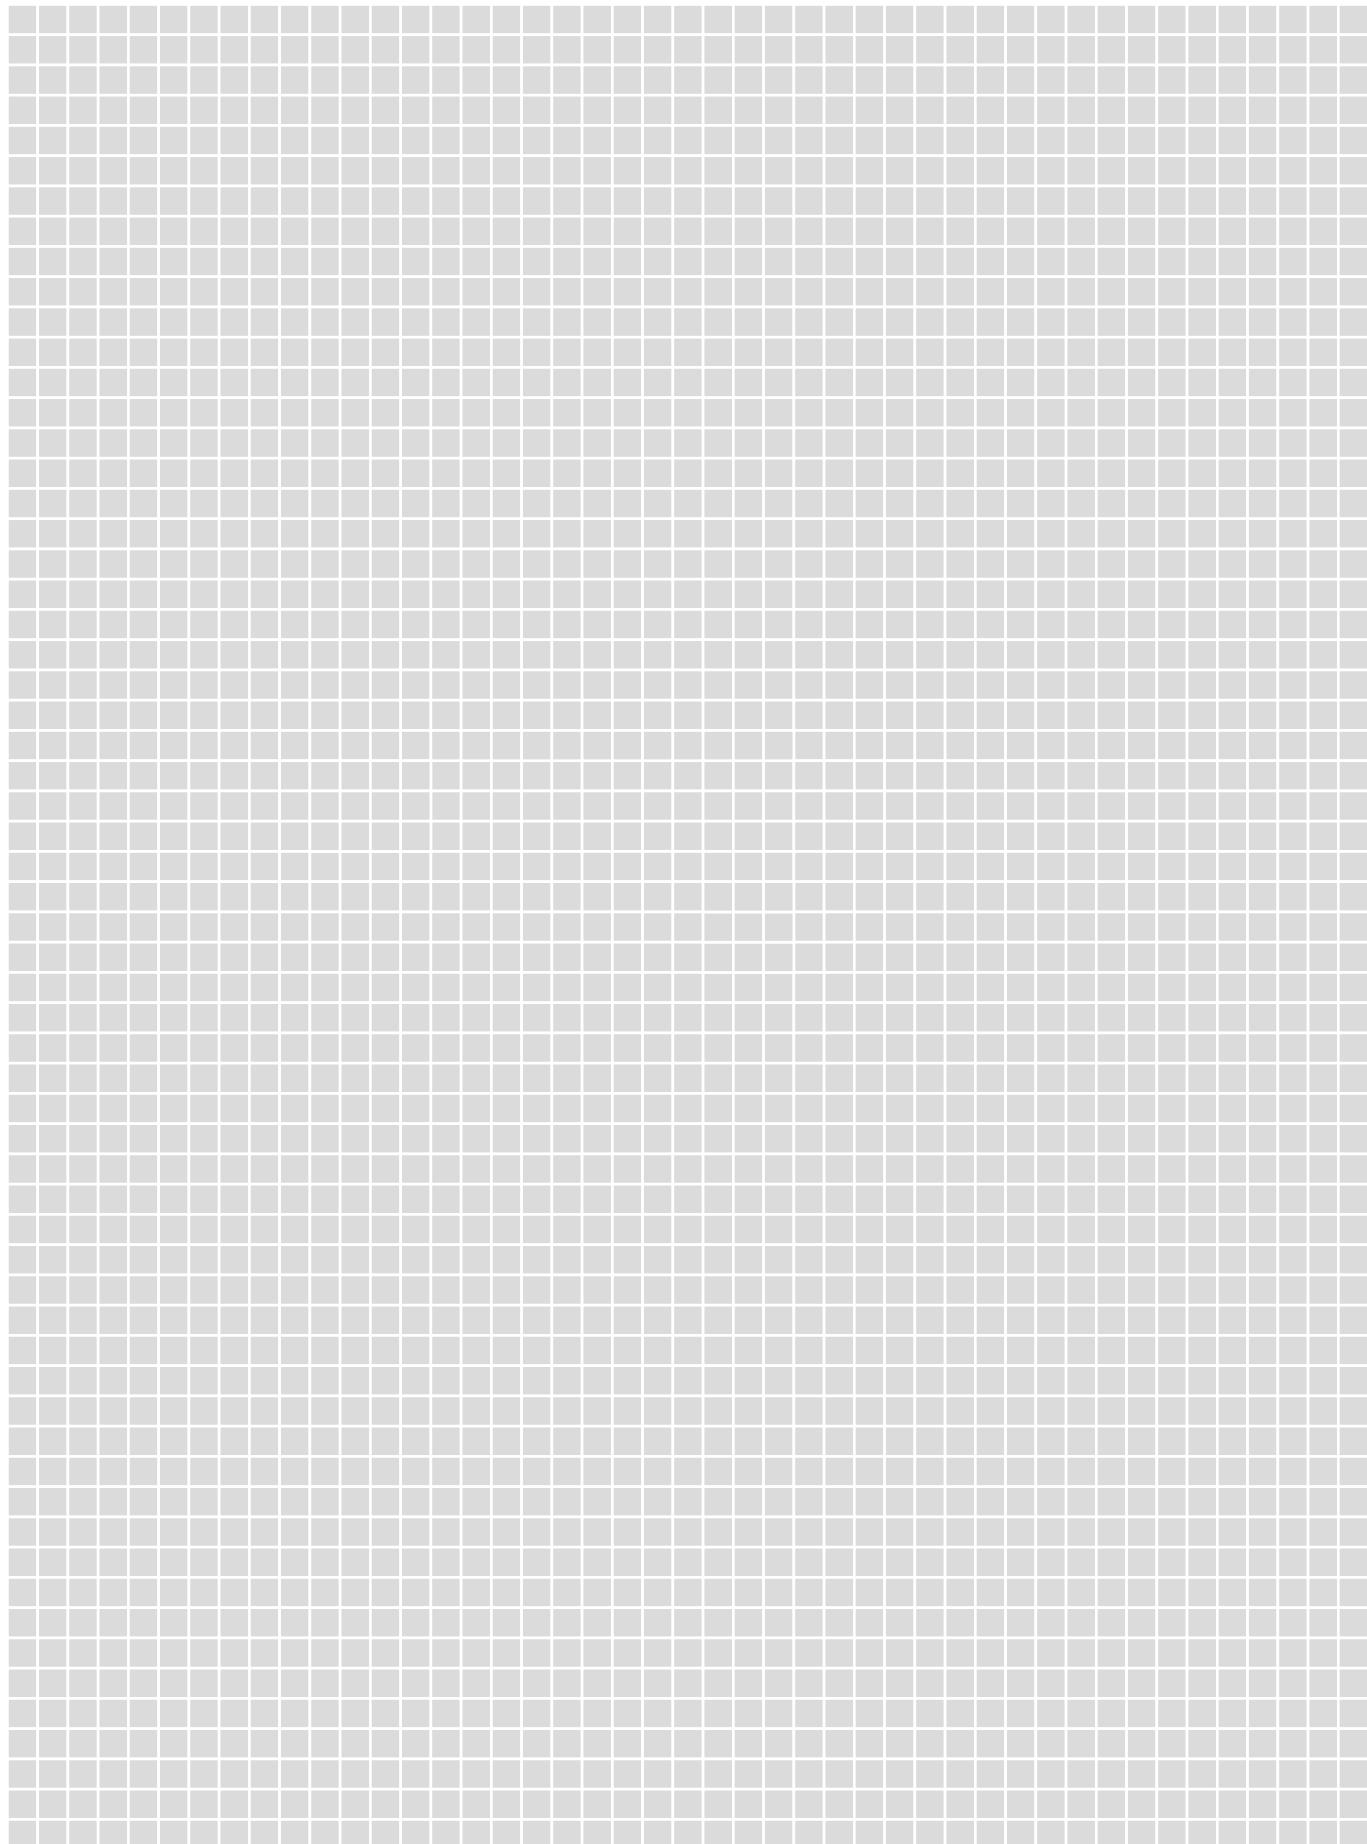

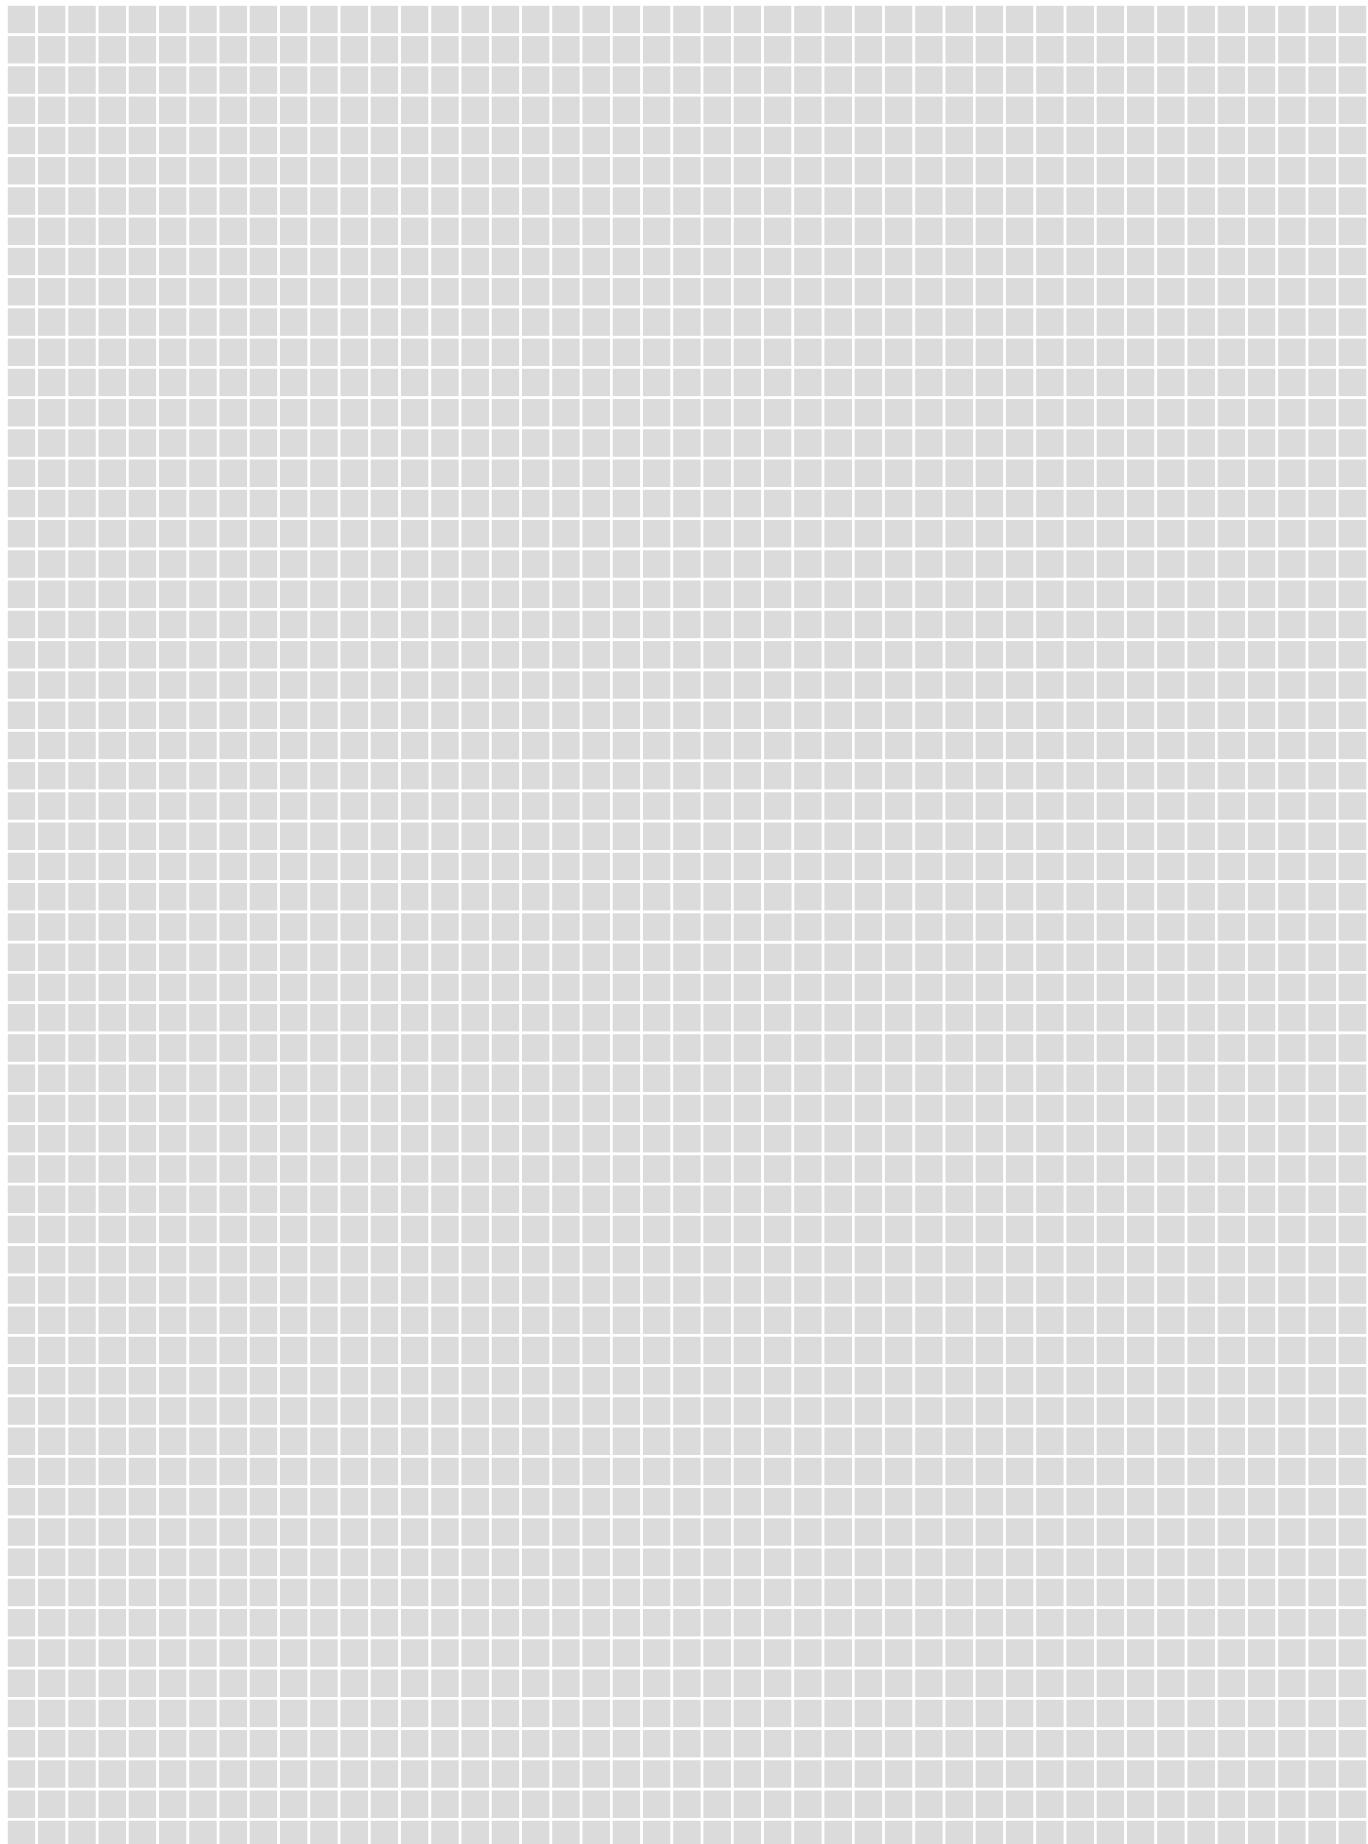



# General Terms and Conditions



Subject to the General Terms and Conditions of Schlüter-Systems Ltd.

All previous price lists lose their validity on the publication of this price list. Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved.

For reasons of printing, colours shown in this price list may differ from actual product colours.

You can find the actual "General Terms and Conditions" of Schlüter-Systems Ltd. here:

**<https://eu.schluter.com/en-GB/general-terms-and-conditions-2651.html>**

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc..

Other trademarks and trade names are those of their respective owners.

# Key

## Properties

-  Low assembly height
-  Plug-and-play
-  Available as a set
-  LED can be shortened
-  IP X5 (protection against water jets)
-  IP X7 (protection against temporary submersion)
-  Bluetooth-enabled
-  Radio-compatible

### Packaging units

P = box packaging  
 KV = case packaging  
 PL = euro pallet  
 Unit = units

### Dimensions


H = height  
 L = length  
 B = width  
 T = depth

### Innovations

 New product

## Application areas

-  Suitable for use on the wall in the shower area
-  Suitable for use on walls in interior spaces
-  Suitable for use on the ceiling
-  Suitable for use in inner corners of rooms
-  Suitable for use on an external room corner
-  Suitable for use on the floor of privately used areas
-  Suitable for use on staircase steps
-  For use in pool landscapes, but not underwater  
(increased resistance against chlorine)
-  Suitable for use on walls in exterior spaces



liprotec.com

## Information

Find out more!

Did we pique your interest in the illuminated profile technology of Schlüter-Systems? Then you might like to learn more. The fastest way is to visit our website. For more information, visit [liprotec.co.uk](http://liprotec.co.uk).

i



Please refer to the Technical Manual or the operating instructions accompanying the product for detailed technical information on the installation of Schlüter-LIPROTEC.

Subject to the General Terms and Conditions of Schlüter-Systems Ltd.

All previous price lists lose their validity on the publication of this price list.

Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved. For reasons of printing, colours shown in this price list may differ from actual product colours.



**Schlüter-Systems KG** Schmölestraße 7 | D-58640 Iserlohn

+49 2371 971-0 +49 2371 971-1111 info@schlueter.de schlueter-systems.com

**Schlüter-Systems Ltd** Units 3-6 Bardon 22 Industrial Estate | Bardon Hill | Coalville | Leicestershire | LE67 1TE  
 +44 (0) 1530 813396 sales@schluter.co.uk liprotec.co.uk